S5-L4

Scansioni di rete con <u>Nmap</u> per identificare host attivi, porte aperte e servizi in esecuzione su metasploitable:

```
┌──(root㉿kali)-[/home/kali]
└─# nmap -sn 192.168.50.0/24
Starting Nmap 7.98 ( https://nmap.org ) at 2026-04-02 09:01 -0400
Nmap scan report for 192.168.50.101
Host is up (0.00019s latency).
MAC Address: 08:00:27:C7:B4:C5 (Oracle VirtualBox virtual NIC)
Nmap scan report for 192.168.50.100
Host is up.
Nmap done: 256 IP addresses (2 hosts up) scanned in 12.04 seconds
```

```
┌──(root㉿kali)-[/home/kali]
└─# nmap -sS -sV -O 192.168.50.101 -oA scansione_nmap.txt
Starting Nmap 7.98 ( https://nmap.org ) at 2026-04-02 09:17 -0400
Stats: 0:01:55 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 73.91% done; ETC: 09:19 (0:00:39 remaining)
Stats: 0:01:57 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 73.91% done; ETC: 09:19 (0:00:40 remaining)
Stats: 0:02:15 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 73.91% done; ETC: 09:20 (0:00:47 remaining)
Nmap scan report for 192.168.50.101
Host is up (0.00021s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE      VERSION
21/tcp   open  ftp          vsftpd 2.3.4
22/tcp   open  ssh          OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
23/tcp   open  telnet?
25/tcp   open  smtp?
53/tcp   open  domain       ISC BIND 9.4.2
80/tcp   open  http         Apache httpd 2.2.8 ((Ubuntu) DAV/2)
111/tcp  open  rpcbind      2 (RPC #100000)
139/tcp  open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
445/tcp  open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
512/tcp  open  exec?
513/tcp  open  login?
514/tcp  open  shell?
1099/tcp open  java-rmi     GNU Classpath grmiregistry
1524/tcp open  bindshell    Metasploitable root shell
2049/tcp open  nfs          2-4 (RPC #100003)
2121/tcp open  ccproxy-ftp?
3306/tcp open  mysql?
5432/tcp open  postgresql   PostgreSQL DB 8.3.0 - 8.3.7
5900/tcp open  vnc          VNC (protocol 3.3)
6000/tcp open  X11          (access denied)
6667/tcp open  irc          UnrealIRCd
8009/tcp open  ajp13        Apache Jserv (Protocol v1.3)
8180/tcp open  http         Apache Tomcat/Coyote JSP engine 1.1
MAC Address: 08:00:27:C7:B4:C5 (Oracle VirtualBox virtual NIC)
Device type: general purpose
Running: Linux 2.6.X
OS CPE: cpe:/o:linux:linux_kernel:2.6
OS details: Linux 2.6.9 - 2.6.33
Network Distance: 1 hop
Service Info: Host: irc.Metasploitable.LAN; OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 185.32 seconds
```

```
┌──(root㉿kali)-[/home/kali]
└─# searchsploit vsftpd 2.3.4
---------------------------------------------------------------------------------------------------
 Exploit Title                                                                   |  Path
---------------------------------------------------------------------------------------------------
vsftpd 2.3.4 - Backdoor Command Execution                                        | unix/remote/49757.py
vsftpd 2.3.4 - Backdoor Command Execution (Metasploit)                           | unix/remote/17491.rb
---------------------------------------------------------------------------------------------------
Shellcodes: No Results
```
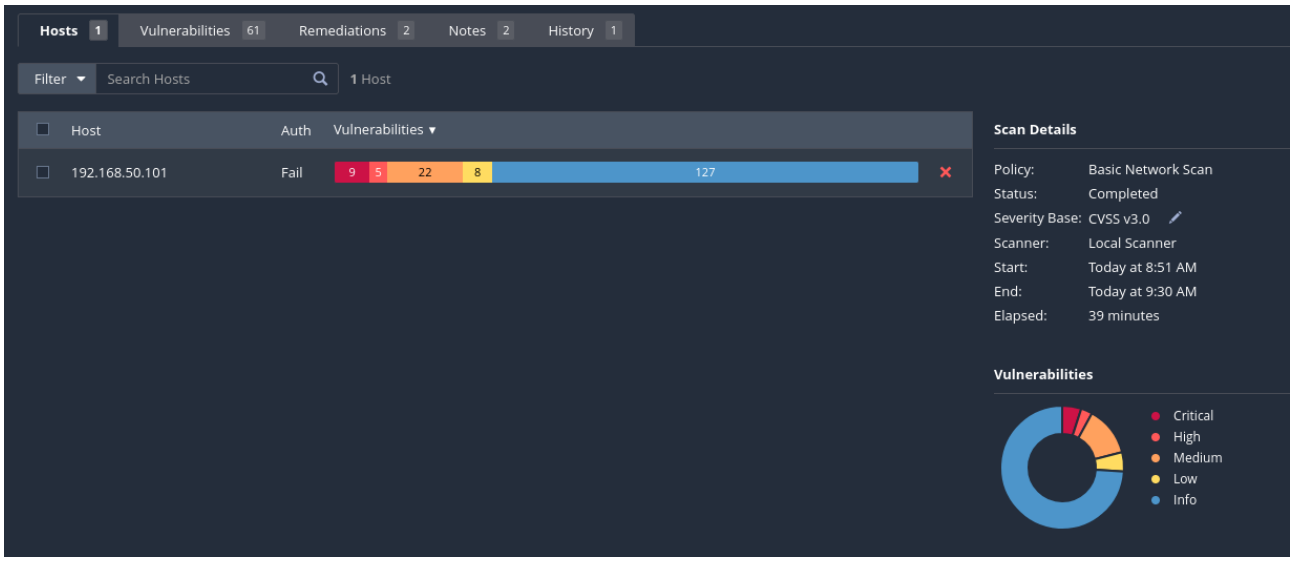
Scansioni di vulnerabilità automatizzate tramite <u>Nessus</u> sempre su metsplotable ed analizzare i risultati: