



Feyzan Colak, Flavio Messina, Noemi Cherchi
Large-scale and multi-structured databases project
2023-2024

Contents

| | |
|---|-----------|
| Contents | 1 |
| 1 Introduction | 2 |
| 2 Analysis | 3 |
| 2.1 Actors | 3 |
| 2.2 Functional Requirements | 3 |
| 2.3 Non Functional Requirements | 4 |
| 2.4 UML class diagram | 5 |
| 2.5 UML use case diagram | 6 |
| 2.6 Data Modeling | 7 |
| 3 Design | 8 |
| 3.1 Document Database | 8 |
| 4 Implementation | 18 |
| 4.1 Development Environment | 18 |
| 4.2 Main Modules | 18 |
| 4.3 Adopted Patterns and Techniques | 24 |
| 4.4 Description of Main Classes | 24 |
| 4.5 MongoDB queries | 28 |
| 4.6 GraphDB queries | 37 |
| 5 Testing | 45 |
| 5.1 Structural Testing | 45 |
| 5.2 Functional Testing | 48 |
| 5.3 Performance Testing | 49 |
| 6 Conclusion | 52 |
| 6.1 Future Work | 52 |
| 6.2 Conclusion | 52 |

Introduction

Aim of the project

MangaVerse is a web application project developed for the Large-scale and Multi-structured Databases course at the University of Pisa. This web application aims to create a **comprehensive platform** for exploring a vast collection of **manga** and **anime**, while also fostering **interaction** among users.

The website is accessible without requiring a login, offering a limited set of functionalities. However, once users log in, they gain access to a wide range of features designed to **personalize** their experience, particularly through **social interactions**.

MangaVerse is designed to be a user-friendly, seamless, and engaging platform for **manga and anime enthusiasts**, to connect with like-minded individuals, discover new content, and share their thoughts and opinions.

To explore the project development details, here is the URL of the GitHub repository:
<https://github.com/xDarkFlamesx/MangaUniverse>.

Application Highlights

- **Comprehensive Media Database:** MangaVerse offers a vast collection of **manga** and **anime** entries, complete with detailed information, ratings, and reviews, to help users make informed decisions.
- **Search and Filter Functionality:** Users can easily search for specific **manga** or **anime** titles, genres, authors, and more, using advanced **filtering** options to refine their search results.
- **User Profiles:** Users can create profiles to **personalize** their experience, track their activity, and connect with other users who share similar interests.
- **User and Media Content Suggestions:** The platform provides tailored suggestions based on user interactions, preferences, and information, enhancing the discovery of new **manga**, **anime**, and **users**.
- **Social Features:** Logged-in users can engage with the community through **reviews**, **likes**, and **follows**, fostering a vibrant community of **manga** and **anime enthusiasts**.
- **Managerial Roles and Analytics:** MangaVerse includes **managerial roles** with access to an **analytics dashboard** for tracking media content and user activities. Managers can **add**, **update**, or **remove manga** and **anime entries**, monitor trends, and analyze ratings to optimize content offerings.
- **Content Management:** Managers can efficiently manage media content and user accounts, ensuring that the platform remains **up-to-date** and **relevant**.

Analysis

Actors

- **Unregistered User:** A visitor who has not logged in on the platform.
- **Registered User:** A user who has created an account on the platform.
- **Manager:** A registered user with administrative privileges.

Functional Requirements

The system should provide the following features for each type of user:

- **Browse Media Contents.**
- **Search and Filter Media Contents:**
 - Find specific manga or anime by title.
 - Utilize basic filtering options to refine the media content list.
- **View Media Content Trends.**
- **View Media Content:**
 - View limited information about each media content.
- **View Media Content Details:**
 - View detailed information about each media content.
 - View reviews and ratings for each media content.
 - View number of likes for each media content.
- **Browse Users.**
- **Search Users by Username.**
- **View User:**
 - View limited information about each user.
- **View User Details:**
 - View detailed information about each user.
 - View anime and manga liked by the user.
 - View followers and following of the user.

Unregistered User

- **Register/Login:**
 - Create a new account to access additional features.
 - Use valid credentials (email and password) to log into the account.

Registered User

- **Logout.**
- **Profile Management:**
 - Edit and update personal information (e.g., profile picture, bio).
 - Delete own profile.
- **Like/Unlike Media Contents.**
- **Follow/Unfollow Users.**
- **Review Media Contents:**
 - Add comment and rating to manga and anime.
 - Edit/Delete own reviews.
- **Advanced Recommendations:**
 - Receive media content suggestions based on user interactions and personal information.
 - Receive users suggestions based on user interactions.

Manager

- **Logout.**
- **Analytics Dashboard:**
 - View user analytics (distribution and app rating).
 - View manga analytics (trends and average rating).
 - View anime analytics (trends and average rating).
- **Content Management:**
 - Add new media content (manga and anime).
 - Update/Remove existing media content.

Non Functional Requirements

Performance

- **Response Time:** The system should have low latency, with pages loading within an acceptable timeframe.
- **Scalability:** The system should be able to handle an increasing number of users and data without significant degradation in performance.
- **Concurrency:** The application should support multiple users simultaneously without performance bottlenecks. For very high traffic scenarios, acceptable delays may be introduced.
- **Availability:** The system should be available 24/7, with minimal downtime for maintenance.
- **Replication:** The system should have data replication to ensure data availability and fault tolerance.

Security

- **Controlled User Operations:** Users should only be able to perform operations that they are authorized to do.

Data Integrity

- **Data Consistency:** The system should maintain data consistency across all components and databases.


User Interface

- **Responsiveness:** The user interface should be responsive, providing a consistent and seamless experience across various devices and screen sizes.
- **Intuitiveness:** The interface should be user-friendly, with clear navigation and easily understandable features.

UML class diagram



UML use case diagram

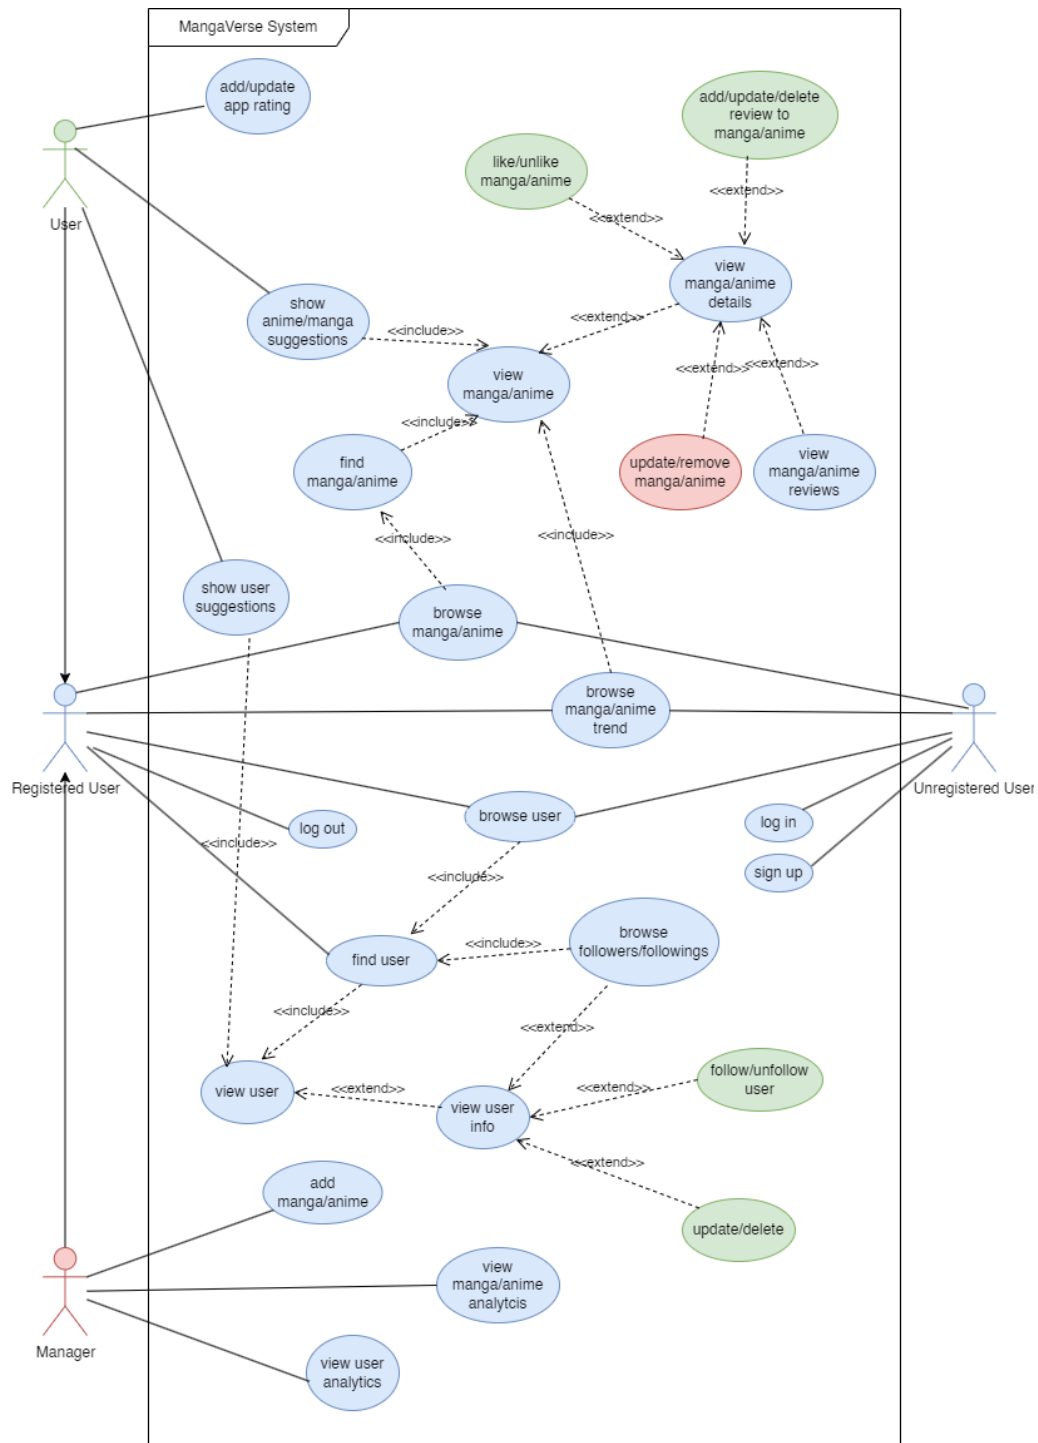

Data Modeling

Data Collection

Sources: [myAnimeList.net](https://myanimelist.net), anilist.co, kitsu.io, livechart.me, anime-planet.com, notify.moe, anisearch.com, anidb.net.

Description: The datasets contain information about anime, manga, users, and scores. Anime and reviews are stored in separate CSV files. The manga dataset is collected from myAnimeList.net, scraped using the [Official API](#) and [Jikan API](#).

Variety: Anime are collected from 8 different sources, manga from one source, and users/reviews from the same sources (myAnimeList and Anime-Planet). The data is structured across 4 CSV files and a JSON file.

Volume: ~3 GB. The datasets contain approximately 10 million reviews, 40k anime entries, 70k manga entries, and 200k users.

Data Cleaning and Preprocessing

The data cleaning and preprocessing involved several steps to ensure consistency and usability of the datasets:

- **Data Integration and Reduction:** Integrating anime, reviews, and user data from various sources required dealing with non-unique IDs across datasets. To ensure proper integration, new unique IDs were generated for each entity. Due to issues with data quality, a significant number of users and their associated reviews were removed. This process resulted in a refined dataset containing 10,000 users and 600,000 reviews.
- **Review Comment Generation:** Some sources lacked explicit comments for reviews. To address this, a script was employed to generate generic comments based on the review ratings, ensuring completeness of the review dataset.
- **Synthetic Data Generation:** Many users did not have sufficient reviews for meaningful analytics. Synthetic reviews were generated to supplement these users, enabling more robust analysis of user interactions and content preferences.
- **Data Pruning:** Extraneous information about users, anime, and manga that were not relevant to the project goals were removed to streamline the datasets.
- **Data Augmentation:** Essential user information such as email, password, and profile picture, which were necessary for user management features, were added to the dataset.
- **Consistency Checks:** Before insertion into the Document DB collections, rigorous data consistency checks were conducted to uphold accuracy and reliability. For instance, chronological consistency was enforced for fields such as the joined date, ensuring it fell after the user's birthdate and before any related review dates. Additionally, user locations were validated to ensure they mapped to valid countries. Upon insertion, Document DB's ids were utilized for entity linking and to maintain data integrity.
- **Graph Database Population:** Fake relationships were created, such as follow relationships between users and like relationships between users and anime/manga, to populate the graph database.

These steps were crucial in preparing the datasets for effective utilization within the MangaVerse platform, ensuring data quality and integrity across all components.

Python was predominantly used for data preprocessing tasks, leveraging its flexibility and extensive libraries. Additionally, Java was employed for specific tasks such as adding and updating redundancies in the document database.

Design

The system is designed to handle a substantial volume of data with varying attributes in both number and type. There are several anime and manga entries that contains missing or incomplete information, and the system must be able to handle this, avoiding meaningless memory occupation. To accommodate this, a Document Database was chosen for its flexibility and schema-less nature, ease of use, and high-performance capabilities. This choice enables the execution of complex queries, including advanced filtering across different attribute types.

In addition, the implementation of social networking functionalities necessitated the use of a Graph Database. This allows for efficient traversal of relationships between entities and effectively manages connections between different entities such as users, anime, and manga.

Document Database

The decision to use a document database, specifically MongoDB, was driven by its **flexibility** and **schema-less nature**, which allows for the storage of data with varying attributes in both number and type. This adaptability makes MongoDB ideal for handling diverse and dynamic data models.

MongoDB also provides a **high-performance environment** for executing complex queries, reducing the need for joins and improving overall application performance by minimizing database access. This is particularly beneficial for applications like MangaVerse that require fast response times and can benefit from pre-computed relationships between entities. By storing embedded relationships directly within documents, MongoDB enables quicker data retrieval, enhancing user experience.

To avoid normalized data, **data redundancy** is used to define relationships between entities. Although this technique can lead to increased memory usage, it enables faster queries and fewer database accesses. For applications with high query complexity and rapidly growing data, such as MangaVerse, this is an optimal trade-off.

To define **one-to-many relationships**, the documents linking pattern is used. In this pattern, one entity stores a list of the IDs of related entities, allowing for quick retrieval without multiple queries. This approach is used for retrieving reviews written by a user or reviews associated with a specific anime or manga. Additionally, document embedding is used for storing the latest reviews within the anime or manga documents, enabling fast access to this information when a user views the anime or manga page.

The document database also includes other redundancies between collections and between the document database and the graph database. For example, fields such as the number of likes for a manga or anime, the number of followers and followings for a user, and the average rating of media content are stored redundantly. To maintain consistency without unnecessary database accesses, a flag called **'avg_rating_last_update'** is used to indicate whether the average rating is up-to-date.

MongoDB is also a **scalable database**, capable of handling large volumes of data and traffic. It supports distribution, providing **high availability**, **fault tolerance**, and **data integrity**. This means MongoDB can easily be scaled out to accommodate growth in both data and traffic, ensuring consistent performance and reliability as the application grows.

Collections

The database contains the following collections:

- **Anime:** This collection stores information about anime, including a list of review IDs and the most recent reviews as nested documents.
- **Manga:** This collection stores information about manga, including a list of review IDs and the most recent reviews as nested documents.
- **Reviews:** This collection stores user ratings and comments for media content. To enhance performance and reduce multiple queries, it includes some user and media redundancies, especially for suggestions and analytics.
- **Users:** This collection stores user data along with a list of review IDs.

Analytics and Suggestions

The application performs various analytics on users, manga, and anime to provide the manager with valuable information regarding user distribution and the average rating of the application or media content. These analytics are grouped by different criteria such as genre, season, and year. Additionally, the application offers personalized media content suggestions to users.

The following is a comprehensive list of all the queries that the application should be able to execute:

- **User Analytics:**
 - Retrieve the distribution of users grouped by gender, joined_on date, birthday, and country;
 - Retrieve the average rating of the application grouped by gender, joined_on date, birthday, and country;
- **Media Content Analytics:**
 - Retrieve the average rating of the media content grouped by various criteria (e.g., genre, type, demographics, author, etc.);
 - Retrieve the average rating of a media content per month or year;
- **Suggestions:**
 - Retrieve the top media content suggestions for a user based on the user's location or birthday.

CRUD operations

- **CREATE**
 - Create a user
 - Create an anime
 - Create a manga
 - Create a review
- **UPDATE**
 - Update user's information
 - Update media content details
 - Update a review
- **DELETE**
 - Delete a user
 - Delete a media content

- Delete a review by its ID
- Delete reviews of a user
- Delete reviews of a media content
- Delete reviews not related to any media content
- Delete a review not related to any user

• READ

- Read a user by the ID
- Read the first N users by username
- Read a media content by its ID
- Read a page of media contents by filters
- Read reviews of a specified user
- Read reviews of a specified media content

JSON document example

Anime:

```

1  {
2  " _id": {
3    "$oid": "65789bb52f5d29465d0abcf0"
4  },
5  "title": "\"Aesop\" no Ohanashi yori: Ushi to Kaeru, Yokubatta Inu",
6  "type": "MOVIE",
7  "episodes": 1,
8  "status": "FINISHED",
9  "picture": "https://cdn.myanimelist.net/images/anime/3/65151.jpg",
10 "tags": [
11   "family friendly",
12   "fantasy",
13   "frogs",
14   "kids"
15 ],
16 "synopsis": "Based on Aesop's Fables.",
17 "latest_reviews": [
18   {
19     "id": {
20       "$oid": "657ed1b40481d3954cf8d69c"
21     },
22     "comment": "Struggles to maintain interest; fails to captivate.",
23     "date": {
24       "$date": "2022-04-11T22:00:00.000Z"
25     },
26     "user": {
27       "id": {
28         "$oid": "6577877ce683762347607f42"
29       },
30       "username": "dreadstuff",
31       "picture": "https://imgbox.com/7MaTkBQR"
32     }
33   },
34   {
35     "id": {
36       "$oid": "657ebc340481d3954cf842e5"
37     },
38     "comment": "Wouldn't recommend to even the most forgiving viewers.",
39     "date": {
40       "$date": "2021-03-19T23:00:00.000Z"
41     },
42     "user": {
43       "id": {
44         "$oid": "6577877ce683762347606bc6"

```

```

45     },
46     "username": "Yoma_Yuki",
47     "picture": "https://imgbox.com/7MaTkBQR"
48   }
49 }
50 ],
51 "anime_season": {
52   "season": "WINTER",
53   "year": 1970
54 },
55 "average_rating": 4.5,
56 "avg_rating_last_update": true,
57 "review_ids": [
58   "66695c50222b3184dbb7d990",
59   "66695c50222b3184dbb7d991",
60   "66695c50222b3184dbb7d992"
61 ],
62 "likes": 7
63 }
64

```

Manga:

```
1  {
2    "_id": {
3      "$oid": "657ac61cb34f5514b91eabc1"
4    },
5    "title": "H20",
6    "type": "MANHWA",
7    "status": "FINISHED",
8    "volumes": 7,
9    "chapters": 43,
10   "genres": [
11     "Romance",
12     "Slice of Life"
13   ],
14   "demographics": [
15     "SHOUJO"
16   ],
17   "authors": [
18     {
19       "id": 4354,
20       "role": "Story & Art",
21       "name": "Sook Ji Hwang"
22     }
23   ],
24   "serializations": "Wink",
25   "synopsis": "Menga is simply known as the vice rep and is bullied. Hanako has moved to
26     Korea but was robbed the first day and has nothing. Na Hong Soo is known as a
27     troublemaker and is in constant trouble. And Eechan is the student body president,
28     very popular and known as Bacchus. It seems they have nothing in common but this will
29     change soon. \n\n(Source: mangaupdates.com)",
30   "title_english": "H20",
31   "picture": "https://cdn.myanimelist.net/images/manga/1/10531.jpg",
32   "average_rating": 3.67,
33   "latest_reviews": [
34     {
35       "id": {
36         "$oid": "66682d94bebc20d9557bba39"
37       },
38       "comment": "Beautiful artwork and engaging characters.",
39       "date": {
40         "$date": "2024-06-17T21:33:37.000Z"
41       },
42       "rating": 7,
43       "user": {
44         "id": {
45           "$oid": "6577877be68376234760635b"
46         },
47         "username": "Sanji-kun",
48         "picture": "images/account-icon.png"
49       }
50     },
51     {
52       "id": {
53         "$oid": "66682d94bebc20d9557bba35"
54       },
55       "comment": "An average manga with a few standout moments.",
56       "date": {
57         "$date": "2024-02-10T20:53:52.000Z"
58       },
59       "rating": 7,
60       "user": {
61         "id": {
62           "$oid": "6577877ce6837623476065f0"
63         },
64         "username": "MangoSlushie",
65         "picture": "https://thypix.com/wp-content/uploads/2021/10/manga-profile-picture-92.jpg"
66       }
67     }
68   ],
69   "start_date": null,
```

```

66 "end_date": null,
67 "avg_rating_last_update": true,
68 "review_ids": [
69   "66682d94bebc20d9557bba35",
70   "66682d94bebc20d9557bba36",
71   "66682d94bebc20d9557bba3b"
72 ]
73 }
74

```

Reviews:

```

1  {
2    "_id": {
3      "$oid": "66682a4fbec20d9557b7542"
4    },
5    "user": {
6      "id": {
7        "$oid": "6577877ce683762347607b2f"
8      },
9      "username": "dagdfsfsgf",
10     "location": "Singapore",
11     "birthday": {
12       "$date": "1991-02-12T00:00:00.000Z"
13     }
14   },
15   "manga": {
16     "id": {
17       "$oid": "657ac61bb34f5514b91ea22a"
18     },
19     "title": "Kaguya-sama wa Kokurasetai: Tensai-tachi no Renai Zunousen"
20   },
21   "rating": 9,
22   "comment": "Rich in emotion and excitement.",
23   "date": {
24     "$date": "2022-07-18T07:18:21.000Z"
25   }
26 }
27

```

Users:

```

1  {
2    "_id": {
3      "$oid": "6577877be683762347605859"
4    },
5    "email": "xdavis@example.com",
6    "password": "290cb38a679d5eb68d11b9eale21f48234eba6de19f95612dbcb70ce0c7e4e78",
7    "description": "Liberating the mind from stress with the power of anime zen.",
8    "picture": "https://thypix.com/wp-content/uploads/2021/10/manga-profile-picture-44.jpg",
9    "username": "Xinil",
10   "gender": "Male",
11   "birthday": {
12     "$date": "1985-03-04T00:00:00.000Z"
13   },
14   "location": "South Africa",
15   "joined_on": {
16     "$date": "2016-11-30T00:00:00.000Z"
17   },
18   "app_rating": 1,
19   "followed": 40,
20   "followers": 29,
21   "review_ids": [
22     "66682a5cbebc20d9557b76b5",
23     "66682b31bebc20d9557b8886",
24     "66682e66bebc20d9557bcb29",
25     "66683301bebc20d9557bf017"
26   ]
27 }
28

```

Redundancy

In a document database, data redundancy can be leveraged to enhance application performance and reduce the number of database accesses. However, the application must manage the consistency between the original data and their redundant copies. This consistency maintenance can impact performance and availability. Therefore, optimal strategies are necessary to ensure data consistency while preserving application performance and availability.


The following redundancies are implemented in the database:

- **Latest Reviews:**
In the anime and manga collections, a field contains the latest 5 reviews for that specific media content. This approach ensures fast retrieval.
- **Average Rating:**
In the anime and manga collections, a field contains the average rating of the media content. This field is updated every time a new review is written.
- **Number of Likes:**
In the anime and manga collections, a field contains the number of likes. This field is updated every time a new like relationship is created or deleted.
- **Followers and Followings:**
In the user collection, fields contain the number of followers and followings. These fields are updated every time a new follow relationship is created or deleted.
- **User Field in Reviews:**
In the reviews collection, a field contains user data, such as id, username, picture, location, and birthday. This data is used for suggestion purposes.
- **Media Content Field in Reviews:**
In the reviews collection, a field contains information about the anime or manga the review pertains to, including the media content id and title.
- **Review Ids:**
A list of review ids is stored in the anime, manga, and user collections. This list is used to quickly retrieve the reviews of media content and users.

Graph Database

The inclusion of social networking functionalities, such as user interactions, likes, and follows, necessitated the integration of a graph database to efficiently manage relationships between entities. A graph database operates on the concepts of nodes and relationships, which are ideal for this purpose. Unlike traditional databases that rely on join tables—often resulting in higher memory usage and slower execution times due to multiple database accesses—a graph database optimizes traversal for relationships. This makes it particularly well-suited for managing complex connections between users, anime, and manga, ensuring faster and more efficient data retrieval and manipulation.

Additionally, graph databases provide enhanced flexibility and scalability, allowing for easier implementation of new features and relationships as the application grows. They support advanced queries that can traverse multiple relationships in a single operation, offering a significant performance boost for social networking applications where interconnected data is prevalent.

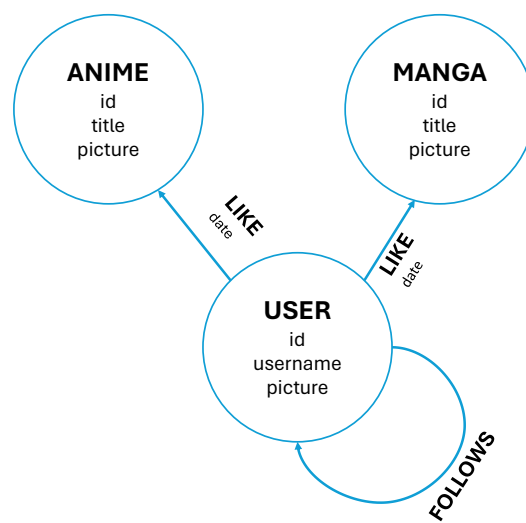

Nodes

The database will have the following nodes:

- User: This node will store information about users, such as id, usernames, and picture.
- Anime: This node will store information about anime, such as id, titles and picture.
- Manga: This node will store information about manga, such as id, titles and picture.

Relationships

The database will have the following relationships:

- LIKE: This relationship will connect users to anime and manga nodes. It will store the date when the user liked the media content.
- FOLLOW: This relationship will connect users to other users.

CRUD operations

- **CREATE**
 - Create a user node
 - Create an anime node
 - Create a manga node
 - Create a LIKE edge between a user and an anime or manga
 - Create a FOLLOW edge between two users
- **UPDATE**
 - Update user's picture and/or username
 - Update media content picture and/or title
- **DELETE**
 - Delete a user node and all edge connected to it
 - Delete a media content node and all edge connected to it
 - Delete a LIKE edge between a user and an anime or manga
 - Delete a FOLLOW edge between two users
- **READ**
 - Read the number of FOLLOW edges outcoming from a user
 - Read the number of FOLLOW edges incoming to a user
 - Read the number of LIKE edges incoming to an anime or manga
 - Read the list of followers of a user
 - Read the list of followings of a user

Availability and Partition Tolerance

MangaVerse, as a social network, adopts the AP configuration of the CAP theorem, emphasizing Availability and Partition Tolerance. This ensures users can reliably access the application, interact with others, and engage with media content, even though data consistency may vary (Eventual Consistency). This approach enhances user experience by prioritizing uninterrupted service over strict data consistency.

Replicas

For MangaVerse, three MongoDB replicas were deployed to ensure high availability, partition tolerance, and rapid response times. This configuration allows the system to remain accessible and responsive even during network partitions or node failures. However, managing data consistency across multiple replicas requires careful handling to achieve eventual consistency without compromising availability.

Sharding

Even though sharding is not currently implemented in MangaVerse, it's crucial to consider its implications. Sharding is a method used to distribute data across multiple machines, essential for managing data growth. As datasets expand, a single machine may become inadequate for storing and managing data with acceptable read and write speeds. Document databases like MongoDB support sharding, which facilitates horizontal scaling.

Choosing the right shard key for each collection is critical for effective sharding in MongoDB. The shard key determines how data is distributed across shards. Factors such as the types of queries performed, document relationships, and document structure must be carefully evaluated when selecting a shard key to ensure optimal performance and scalability.

In its current implementation, MangaVerse does not support sharding. A potential approach could involve sharding anime and manga data by unique identifiers like id or title, and reviews by media content id or title to keep related data together on the same shard. However, this strategy may lead to performance challenges. Queries involving reviews related to a specific user or media content suggestions based on user location and birthday could require accessing multiple shards, potentially reducing application performance. Similarly, analytical tasks like computing average ratings across anime and manga collections would necessitate querying all shards, which can be inefficient.

Implementation

Development Environment

To ensure efficient and successful Implementation of MangaVerse web application, choosing the appropriate development environment is one of the most important points of the project.

Programming Languages

- **Backend:** Java is the main programming language used in the project's backend development.
- **Frontend:** HTML, CSS, JavaScript are utilized for building user interface in the project.
- **Data Preprocessing:** Python and java were used in the project to conduct data preprocessing task with the help of its powerful libraries and ease of use features.

Database

- **Document Database:** MongoDB is used in the project to store and manage document-based data with the help of its flexibility and scalability features.
- **Graph Database:** Neo4j is used in the project to manage and query graph data and handle complex relationships and connections between user entities and media contents in an efficient way.

Integrated Development Environment

IntelliJ IDEA was used as an primary IDE. It is powerful Java integrated development environment for developing software in an efficient way.

Version Control

Github was used to provide a collaborative development with its version control system.

Web Server

Apache Tomcat was used as a web server to provide reliable environment for deploying and running the java based web application.

Build Automation

Maven was used as a build automation tool. It is used to manage the project's build, reporting, and documentation from a central piece of information.

Testing

JUnit was used as a testing framework for Java code. It is used to write and run repeatable automated tests. This ensures the reliability and efficiency of the codebase throughout the development process.

Main Modules

- Configuration
- Controller
- DAO (Data Access Objects)

- DTO (Data Transfer Objects)
- Model
- Service
- Utils
- User Interface

Configuration

Configuration module contains a class named *AppServletContextListener* which is responsible for initializing and managing database connections for the web application. The configuration class implements *ServletContextListener* interface. *@WebListener* annotation is used to provide listening for application lifecycle events. This annotation contains two methods, which are *contextInitialized(ServletContextEvent sce)* and *contextDestroyed(ServletContextEvent sce)*. The first method is called when the web application is started and the second method is called when the web application is shut down.

Database Connection Management: Database connection is provided with *openConnection()* and *closeConnection()* methods. They are both initialized for managing connection for MongoDB and Neo4j databases. Connections are managed with corresponding DAO classes which are *BaseMongoDBDAO* and *BaseNeo4jDAO*.

With using the configuration module for database connection, web application ensures robustness and reliability in its data access layer.

Controller

The controller modules plays a role as intermediary between the user requests and backend of the MangaVerse web application as servlet classes. They receive the user requests, process them and return with the corresponding response. The controller classes are implemented using *HttpServlet* to handle user requests and responses. Within the scope of their intermediary role, the controller classes are responsible of being a bridge between the user interface and backend logic. When a user interacts with the web application, their actions are translated into a HTTP request and these requests are handled by the related servlet class in the controller module. To be able to do request translation in an efficient way each controller class extends *'HttpServlet'* and has various methods to handle HTTP requests like GET and POST. Each controller class utilizes a switch-case structure to determine the action requested and invokes the appropriate handler method accordingly. This structure allows for clear and organized routing of request to their corresponding handler method. After processing the request, the servlet generates a requested response.

Example code snippet from MediaContentServlet:

```

1 {
2     protected void processRequest(HttpServletRequest request, HttpServletResponse response
3     ) throws ServletException, IOException {
4         String action = request.getParameter("action");
5
6         switch (action) {
7             case "toggleLike" -> handleToggleLike(request, response);
8             case "addReview" -> handleAddReview(request, response);
9             case "deleteReview" -> handleDeleteReview(request, response);
10            case "editReview" -> handleEditReview(request, response);
11            case "getMediaContent" -> handleGetMediaContentById(request, response);
12            case "getMediaContentByTitle" -> handleSearchMediaContentByTitle(request,
13            response);
14            case null, default -> handleLoadPage(request, response);
15        }
16    }
17 }

```

The controller module contains the following classes:

- **Exception**
NotAuthorizedException: This exception is thrown when the user is not authorized to access the requested resource.
- **AuthServlet**
The AuthServlet class handles the user authentication and authorization processes. It includes login, logout and sign up functions
- **MainPageServlet**
The MainPageServlet class is responsible for handling the main page of the web application. It includes the main page of the web application and the search functionality. It provides request related to displaying main page and searching media contents.
- **ManagerServlet**
The ManagerServlet class manages administrative requests in manager page. These request are primarily about manga, anime and user analytics such *averageRatingByMonth()*, *trendMediaContentByYear()*, *getBestCriteria()*...
- **MediaContentServlet**
The MediaContentServlet class is responsible for managing request related with media contents. These requests include like, adding, deleting or editing reviews and retrieving media content details.
- **ProfileServlet**
The ProfileServlet class is responsible for managing user profile related requests. These requests include updating user profile, following/unfollowing other users, getting user profile details such as liked anime and manga and user reviews.
- **UserServlet**
The UserServlet class is responsible for managing user related requests and interactions. These requests include retrieving followers list, following list and user information.

DAO (Data Access Objects)

The DAO module includes the logic for accessing and managing data in the database and provides data retrieval, storage and manipulation. This module includes classes with CRUD (create, read, update, delete) operations and query executions. It provides a layer of abstraction between the database and the rest of the application and ensures the separation of concerns. The DAO module contains the following classes:

- **Enums**
 - DataRepositoryEnum
- **Exceptions**
- **Interfaces**
 - MediaContentDAO
 - ReviewDAO
 - UserDAO
- **Mongo**
 - AnimeDAOMongoImpl
 - BaseMongoDBDAO
 - MangaDAOMongoImpl
 - ReviewDAOMongoImpl
 - UserDAOMongoImpl
- **Neo4j**
 - AnimeDAONeo4jImpl
 - BaseNeo4jDAO
 - MangaDAONeo4jImpl
 - UserDAONeo4jImpl
- **DAOLocator**

Example code snippet from MangaDAOMongoImpl:

```
1 {
2     //MongoDB queries
3     //Best genres/themes/demographics/authors based on the average rating
4     @Override
5     public Map<String, Double> getBestCriteria (String criteria, boolean isArray, int page
6     ) throws DAOException {
7         try {
8             MongoClient<Document> mangaCollection = getCollection(COLLECTION_NAME);
9             int pageOffset = (page-1)*Constants.PAGE_SIZE;
10
11             List<Bson> pipeline;
12             if (isArray) {
13                 pipeline = List.of(
14                     match(and(exists(criteria), ne("average_rating", null))),
15                     unwind("$" + criteria),
16                     group("$" + criteria, avg("criteria_average_rating", "
17 $average_rating")),
18                     sort(descending("criteria_average_rating")),
19                     skip(pageOffset),
20                     limit(25)
21                 );
22             } else {
23                 pipeline = List.of(
24                     match(Filters.exists(criteria)),
25                     group("$" + criteria, avg("criteria_average_rating", "
26 $average_rating")),
27                     sort(new Document("criteria_average_rating", -1)),
28                     skip(pageOffset),
29                     limit(25)
30                 );
31             }
32
33             List<Document> document = mangaCollection.aggregate(pipeline).into(new
34             ArrayList<>());
35             Map<String, Double> bestCriteria = new LinkedHashMap<>();
36             for (Document doc : document) {
37                 Double avgRating = doc.get("criteria_average_rating") instanceof Integer?
38                     doc.getInteger("criteria_average_rating").doubleValue() :
39                     doc.getDouble("criteria_average_rating");
40                 if (criteria.equals("authors")) {
41                     bestCriteria.put(doc.get("_id", Document.class).getString("name"),
42                     avgRating);
43                 } else {
44                     bestCriteria.put(doc.get("_id").toString(), avgRating);
45                 }
46             }
47             return bestCriteria;
48         } catch (Exception e) {
49             throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
50         }
51     }
52 }
```

Example code snippet from UserDAONeo4jImpl:

```
1 {
2     /**
3      * Retrieves a list of users following a specific user from the Neo4j database.
4      *
5      * @param userId The ID of the user whose followers are to be retrieved.
6      * @param loggedUserId The ID of the user requesting the list of followers.
7      * @return A list of RegisteredUserDTO objects representing the followers of the
8      *         specified user.
9      * @throws DAOException If an error occurs while retrieving the followers list.
10    */
11    @Override
12    public List<UserSummaryDTO> getFirstNFollowers(String userId, String loggedUserId)
13        throws DAOException {
14        try (Session session = getSession()) {
15            StringBuilder queryBuilder = new StringBuilder("MATCH (follower:User)-[:FOLLOWS
16            ]->(:User {id: $userId}) ");
17            if (loggedUserId != null) {
18                queryBuilder.append("WHERE follower.id <> $loggedUserId ");
19            }
20            queryBuilder.append("RETURN follower AS user ");
21            queryBuilder.append("ORDER BY follower.username ");
22            queryBuilder.append("LIMIT 10");
23            String query = queryBuilder.toString();
24
25            Map<String, Object> params = new HashMap<>();
26            params.put("userId", userId);
27            if (loggedUserId != null) {
28                params.put("loggedUserId", loggedUserId);
29            }
30
31            List<Record> records = session.executeRead(
32                tx -> tx.run(query, params).list()
33            );
34
35            return records.isEmpty() ? null : records.stream()
36                .map(this::recordToUserSummaryDTO)
37                .toList();
38
39        } catch (Neo4jException e) {
40            throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
41
42        } catch (Exception e) {
43            throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
44        }
45    }
46 }
```

DTO (Data Transfer Objects)

The DTO modules are the intermediary class between presentation layer and the DAO module in the web application. They transfer data structures between different layers and components of the application in a more standardized way.

Model

- Enums
- Media Content
 - Anime
 - Manga
 - Manga Author
 - Media Content
- Registered User
 - Manager
 - Registered User
 - User
- Review

Service

Service module has also important role in the web application. The classes in the service module are responsible for containing the business logic and maintaining interaction between the DAO classes and the presentation layer. It handles complex operations with guarantying that the application's core functionalities are executed correctly. Some of the services that are provided in the service module are: *UserService*, *MediaContentService*, *ReviewService*, *TaskManager*, *ExecutorTaskService*. The package structure of Service module is as follows:

- enums
 - ExecutorTaskService
- exceptions
 - enums
 - BusinessExceptionType
 - BusinessException
- impl
 - async media tasks
 - CreateMediaTask
 - DeleteMediaTask
 - UpdateAverageRatingTask
 - UpdateMediaRedundancyTask
 - UpdateMediaTask
 - UpdateNumberOfLikesTask
 - async review tasks
 - RemoveDeletedMediaReviewsTask
 - RemoveDeletedUserReviewsTask
 - UpdateReviewRedundancyTask
 - async user tasks
 - CreateUserTask
 - DeleteUserTask
 - UpdateNumberOfFollowedTask
 - UpdateNumberOfFollowersTask
 - UpdateUserTask
 - AperiodicExecutorTaskServiceImpl
 - ErrorTaskManager
 - MediaContentServiceImpl
 - PeriodicExecutorTaskServiceImpl

- ReviewServiceImpl
- UserServiceImpl
- interfaces
 - ExecuterTaskService
 - MediaContentService
 - ReviewService
 - Task
 - TaskManager
 - UserService
- ServiceLocator

Adopted Patterns and Techniques

Patterns

Techniques

Task Manager:

Task Manager class which is located in the service module of the system provides asynchronous task execution with using *PriorityBlockingQueue*. It helps to order the tasks according to their prioritizes. After that prioritization, it ensures that higher priority tasks will be executed first and if two tasks have the same priority the one which is created before will be executed first. While Task Manager class is able to start and stop the tasks within the functions inside, it can also take tasks to the queue in a thread-safe way. By using taskComparator for ordering the tasks, the system provides also effective scheduling and execution.

Aperiodic Executor Task Service:

Executor Task Service class which is located inside the service module of the system is an important part for providing the eventual consistency. Executing tasks in asynchronous way with threads guarantees eventual consistency across different collections, mongoDB and neo4j and different replicas. With the help of the Executor Task Service, tasks that are needed to be executed in an asynchronous way are handled by ensuring that changes propagate correctly across different part of the system. While using multiple databases and data replicas for this web application, it is important for maintain data integrity and eventual consistency. Executing the tasks in an asynchronous way using threads allows to perform operations without blocking the main execution flow. Aperiodic executor task service class is implemented by using the interface of executor service.

Description of Main Classes

Controller

| Class | Description |
|---------------------|---|
| AuthServlet | Handles business logic for authentication |
| MainPageServlet | Handles business logic for main page |
| ManagerServlet | Handles business logic for manager |
| MediaContentServlet | Handles business logic for media content |
| ProfileServlet | Handles business logic for profile |
| UserServlet | Handles business logic for user |

DAO

| Class | Sub-package | Description |
|--------------------|-------------|--|
| MediaContentDAO | interfaces | Collection of methods for media content database related entities on mongoDB |
| ReviewDAO B | interfaces | Collection of methods for review database related entities on mongoDB |
| UserDAO | interfaces | Collection of methods for user database related entities on mongoDB |
| AnimeDAOMongoImpl | mongo | Contains all the method implementation for the MongoDB database anime entities |
| BaseMongoDBDAO | mongo | Contains all the method implementations for the MongoDB database |
| MangaDAOMongoImpl | mongo | Contains all the method implementations for the MongoDB database manga entities |
| ReviewDAOMongoImpl | mongo | Contains all the method implementations for the MongoDB database review entities |
| UserDAOMongoImpl | mongo | Contains all the method implementations for the MongoDB database user entities |
| AnimeDAONeo4jImpl | neo4j | Contains all the method implementation for the Neo4j database anime entities |
| BaseNeo4jDAO | neo4j | Contains all the method implementations for the Neo4j database |
| MangaDAONeo4jImpl | neo4j | Contains all the method implementation for the Neo4j database manga entities |
| UserDAONeo4jImpl | neo4j | Contains all the method implementation for the Neo4j database user entities |
| DAOLocator | | Implements the locator pattern for accessing DAOs based on the specified data repository |

DTO

| Class | Sub-package | Description |
|-----------------|--------------|--|
| AnimeDTO | mediaContent | Represents data transfer object containing attributes for animes |
| MangaDTO | mediaContent | Represents data transfer object containing attributes for mangas |
| MediaContentDTO | interfaces | Defines common attributes for media content |
| DashboardDTO | statistics | Contains statistical data for the dashboard |
| MongoDBStats | statistics | Provides statistics specific to MongoDB |
| LoggedUserDTO | | Holds information about a logged-in user. |
| PageDTO | | Represents pagination details |
| ReviewDTO | | Contains attributes for reviews |

| Class | Sub-package | Description |
|---------------------|-------------|--|
| UserRegistrationDTO | | Holds data for user registration |
| UserSummaryDTO | | Provides a summary of user information |

Model

| Class | Sub-package | Description |
|----------------|----------------|--|
| Anime | mediaContent | Provides unique anime attributes by extending parent class MediaContent and related getter and setter methods. |
| Manga | mediaContent | Provides unique manga attributes by extending parent class MediaContent and related getter and setter methods. |
| MangaAuthor | mediaContent | Contains manga author attributes and related getter and setter methods. |
| MediaContent | mediaContent | Contains all the attributes used by types of media contents and their getter and setter methods. |
| Manager | registeredUser | Provides unique manager attributes by extending parent class RegisteredUser and related getter and setter methods. |
| RegisteredUser | registeredUser | Contains all the attributes used by types of registered users and their getter and setter methods. |
| User | registeredUser | Provides unique user attributes by extending parent class RegisteredUser and related getter and setter methods. |
| Review | | Contains review attributes and related getter and setter methods. |

Service

| Class | Sub-package | Description |
|--------------------------------|-----------------------------|---|
| CreateMediaTask | impl/ asinc_media_tasks | Implementation of methods for media task creation for MediaContentService |
| DeleteMediaTask B | impl/ asinc_media_tasks | Implementation of methods for media task deletion for MediaContentService |
| RefreshLatestReviewsTasks | impl/ asinc_media_tasks | Implementation of methods for refreshing latest reviews for MediaContentService |
| UpdateAverageRatingTask | impl/ asinc_media_tasks | Implementation of methods for updating average rating for MediaContentService |
| UpdateMediaRedundancyTask | impl/ asinc_media_tasks | Implementation of methods for updating media redundancy for MediaContentService |
| UpdateMediaTask | impl/ asinc_media_tasks | Implementation of methods for updating media for MediaContentService |
| UpdateNumberOfLikesTask | impl/ asinc_media_tasks | Implementation of methods for updating numbers of likes for MediaContentService |
| RemoveDeletedMedia ReviewsTask | impl/ asinc_review_tasks | Implementation of methods for removing reviews of deleted media for ReviewService |

| Class | Sub-package | Description |
|----------------------------------|-----------------------------|--|
| RemoveDeletedUserReviewsTask | impl/ asinc_review_tasks | Implementation of methods for removing reviews of deleted user for ReviewService |
| UpdateReviewRedundancyTask | impl/ asinc_review_tasks | Implementation of methods for updating review redundancy for ReviewService |
| CreateUserTask | impl/ asinc_user_tasks | Implementation of methods for user creation for UserService |
| DeleteUserTask | impl/ asinc_user_tasks | Implementation of methods for user deletion for UserService |
| UpdateNumberOfFollowedTaskB | impl/ asinc_user_tasks | Implementation of methods for updating number of followed for UserService |
| UpdateNumberOfFollowersTask | impl/ asinc_user_tasks | Implementation of methods for updating number of followers for UserService |
| UpdateUserTask | impl/ asinc_user_tasks | Implementation of methods for updating user for MediaContentService |
| AperiodicExecutorTaskServiceImpl | impl | Implementation of aperiodic tasks for ExecutorTaskService |
| ErrorTaskManager | impl | Implementation of TaskManager interface to handle error |
| MediaContentServiceImpl | impl | Implementation of MediaContentService, providing media content operations |
| PeriodicExecutorTaskServiceImpl | impl | Implementation of periodic tasks for ExecutorTaskService |
| ReviewServiceImpl | impl | Implementation of ReviewService, providing review operations |
| UserServiceImpl | impl | Implementation of UserService, providing user operations |
| ExecutorTaskService | interfaces | Collection of methods for task management |
| MediaContentService | interfaces | Collection of methods for media content service |
| ReviewService | interfaces | Collection of methods for review service |
| Task | interfaces | Collection of methods for execution operations |
| TaskManager | interfaces | Collection of methods for managing task prioritization |
| UserService | interfaces | Collection of methods for user service |
| ServiceLocator | | Implements locator pattern for services |

MongoDB queries

Some of the most important MongoDB queries for analytic and suggestion purposes.

USER:

Get Distribution

GetDistribution query to get the user's location, birthday year that gave the highest rating to the application

- Java Implementation:

```
1 public Map<String, Integer> getDistribution(String criteria) throws DAOException {
2     try {
3         MongoCollection<Document> usersCollection = getCollection(COLLECTION_NAME);
4
5         List<Bson> pipeline = new ArrayList<>();
6         if (criteria.equals("birthday") || criteria.equals("joined_on")) {
7             pipeline.addAll(List.of(
8                 match(exists(criteria)),
9                 project(fields(computed("year", new Document("$year", "$" + criteria)),
10                    include("app_rating" ))),
11                 group("$year", sum("count", 1)),
12                 sort(descending("count"))));
13         } else if (criteria.equals("location") || criteria.equals("gender")) {
14             pipeline.addAll(List.of(
15                 match(exists(criteria)),
16                 project(fields(include(criteria, "app_rating")),
17                    group("$" + criteria, sum("count", 1)),
18                    sort(descending("count"))));
19         } else {
20             throw new Exception("UserDAOMongoImpl: getDistribution: Invalid criteria");
21         }
22
23         List<Document> aggregationResult = usersCollection.aggregate(pipeline).into(new
24             ArrayList<>());
25         if (aggregationResult.isEmpty()) {
26             throw new MongoException("UserDAOMongoImpl: getDistribution: No data found");
27         }
28
29         Map<String,Integer> map = new LinkedHashMap<>();
30         for (Document doc : aggregationResult) {
31             if (criteria.equals("birthday") || criteria.equals("joined_on")) {
32                 map.put(String.valueOf(doc.getInteger("_id")), doc.getInteger("count"));
33             } else {
34                 map.put(doc.getString("_id"), doc.getInteger("count"));
35             }
36         }
37         return map;
38     } catch (MongoException e){
39         throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
40     } catch (Exception e){
41         throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
42     }
```

- Mongo Shell Query:

```
1 // Match stage to filter documents where 'criteriaOfSearch' exists
2 db.collection.aggregate([
3     {
4         $match: {
5             [criteriaOfSearch]: { $exists: true }
6         }
7     },
8     // Project stage to include 'criteriaOfSearch' and 'app_rating' fields
9     {
10         $project: {
11             [criteriaOfSearch]: 1,
12             app_rating: 1
13         }
14     }
15 ])
```

```

14     },
15     // Group stage to count occurrences of each 'criteriaOfSearch'
16     {
17         $group: {
18             _id: "$" + criteriaOfSearch,
19             count: { $sum: 1 }
20         }
21     },
22     // Sort stage to sort documents by 'count' in descending order
23     {
24         $sort: {
25             count: -1
26         }
27     }
28 });

```

Average App Rating

Calculates the average application rating based on the specified search criteria

- Java Implementation:

```

1 public Map<String, Double> averageAppRating(String criteria) throws DAOException {
2     try {
3         MongoCollection<Document> usersCollection = getCollection(COLLECTION_NAME);
4
5         List<Bson> pipeline = List.of(
6             match(and(exists(criteria), exists("app_rating"))),
7             group("$" + criteria, avg("averageAppRating", "$app_rating")),
8             sort(descending("averageAppRating"))
9         );
10
11         List<Document> aggregationResult = usersCollection.aggregate(pipeline).into(new
12             ArrayList<>());
13         if (aggregationResult.isEmpty()) {
14             throw new MongoException("UserDAOMongoImpl: averageAppRating: No data found");
15         }
16
17         Map<String, Double> map = new LinkedHashMap<>();
18         for (Document doc : aggregationResult) {
19             map.put(doc.getString("_id"), doc.getDouble("averageAppRating"));
20         }
21         return map;
22     } catch (MongoException e) {
23         throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
24     }
25     catch (Exception e) {
26         throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
27     }
28 }

```

- Mongo Shell Query:

```

1 db.getCollection.aggregate([
2     {
3         $match: {
4             $and: [
5                 { [criteria]: { $exists: true } },
6                 { app_rating: { $exists: true } }
7             ]
8         }
9     },
10    {
11        $group: {
12            _id: "$" + criteria,
13            averageAppRating: { $avg: "$app_rating" }
14        }
15    },
16    {
17        $sort: {
18            averageAppRating: -1
19        }
20    }

```

```
21 }).toArray();
```

Average App Rating By Age

Calculates the average app rating for users grouped by age ranges. The age ranges are defined as follows:

- 0-13 years
- 13-20 years
- 20-30 years
- 30-40 years
- 40-50 years
- 50+ years

• Java Implementation:

```
1 public Map<String, Double> averageAppRatingByAgeRange() throws DAOException {
2     try {
3         MongoClient<Document> usersCollection = getCollection(COLLECTION_NAME);
4
5         // Define the boundaries for the age ranges and the output fields
6         List<Long> boundaries = Arrays.asList(0L, 13L, 20L, 30L, 40L, 50L);
7         BsonField[] outputFields = {
8             new BsonField("avg_app_rating", new Document("$avg", "$app_rating"))
9         };
10        BucketOptions options = new BucketOptions()
11            .defaultBucket(50L)
12            .output(outputFields);
13
14        List<Bson> pipeline = List.of(
15            match(and(exists("birthday"), exists("app_rating"))),
16            project(fields(
17                computed("age", new Document("$floor", new Document("$divide",
18                    Arrays.asList(
19                        new Document("$subtract", Arrays.asList(new Date(), "$birthday
20                        1000L * 60 * 60 * 24 * 365
21                    )))),
22                include("app_rating")
23            )),
24            bucket("$age", boundaries, options)
25        );
26
27        List<Document> aggregationResult = usersCollection.aggregate(pipeline).into(new
28        ArrayList<>());
29
30        if (aggregationResult.isEmpty()) {
31            throw new MongoException("UserDAOMongoImpl: averageAppRatingByAgeRange: No data
32            found");
33        }
34
35        Map<String, Double> map = new LinkedHashMap<>();
36        for (Document doc : aggregationResult) {
37            String ageRange = convertIntegerToAgeRange(doc.getLong("_id"));
38            map.put(ageRange, doc.getDouble("avg_app_rating"));
39        }
40
41        return map;
42    } catch (MongoException e) {
43        throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
44    } catch (Exception e) {
45        throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
46    }
47 }
```

• Mongo Shell Query:

```
1 db.getCollection('COLLECTION_NAME').aggregate([
2     {
3         $match: {
4             $and: [
5                 { birthday: { $exists: true } },
6                 { app_rating: { $exists: true } }
7             ]
8         }
9     }
10 ])
```

```

8         }
9     },
10    {
11        $project: {
12            age: {
13                $floor: {
14                    $divide: [
15                        { $subtract: [ new Date(), "$birthday" ] },
16                        1000 * 60 * 60 * 24 * 365
17                    ]
18                }
19            },
20            app_rating: 1
21        }
22    },
23    {
24        $bucket: {
25            groupBy: "$age",
26            boundaries: [0, 13, 20, 30, 40, 50],
27            default: 50,
28            output: {
29                avg_app_rating: { $avg: "$app_rating" }
30            }
31        }
32    }
33 ]).toArray();

```

REVIEW:

Get Media Content Rating By Year

Retrieves the average ratings for a specific media content (anime or manga) by year within a specified range. The aggregation pipeline performs the following steps:

1. Matches the reviews for the specified media content ID and date range, ensuring the reviews have a rating.
2. Groups the reviews by year and calculates the average rating for each year.
3. Projects the results to include the year and the calculated average rating.
4. Sorts the results by year in ascending order.

- Java Implementation:

```

1 public Map<String, Double> getMediaContentRatingByYear(MediaContentType type, String
   mediaContentId, int startYear, int endYear) throws DAOException {
2     try {
3         // Get media content rating by year
4         MongoCollection<Document> reviewCollection = getCollection(COLLECTION_NAME);
5
6         String nodeType = type.equals(MediaContentType.ANIME) ? "anime" : "manga";
7         Date startDate = ConverterUtils.localDateToDate(LocalDate.of(startYear, 1, 1));
8         Date endDate = ConverterUtils.localDateToDate(LocalDate.of(endYear + 1, 1, 1));
9         List<Bson> pipeline = List.of(
10             match(and(
11                 eq(nodeType + ".id", new ObjectId(mediaContentId)),
12                 exists("rating", true),
13                 gte("date", startDate),
14                 lt("date", endDate)
15             )),
16             group(new Document("$year", "$date"), avg("average_rating", "$rating")),
17             project(fields(
18                 excludeId(),
19                 computed("year", "$_id"),
20                 include("average_rating")
21             )),
22             sort(ascending("year"))
23         );
24         List<Document> result = reviewCollection.aggregate(pipeline).into(new ArrayList<>());
25
26         // Initialize the result map with years and default values
27         Map<String, Double> resultMap = new LinkedHashMap<>();
28         for (int year = startYear; year <= endYear; year++) {
29             resultMap.put(String.valueOf(year), null);
30         }

```



```

31
32     // Populate the result map with the average ratings
33     for (Document document : result) {
34         Double averageRating = document.getDouble("average_rating");
35         Integer year = document.getInteger("year");
36         resultMap.put (String.valueOf(year), averageRating);
37     }
38     return resultMap;
39
40 } catch (MongoException e) {
41     throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
42 } catch (Exception e) {
43     throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
44 }
45 }

```

- Mongo Shell Query:

```

1 // Match stage to filter documents based on specified conditions
2 db.collection.aggregate([
3     {
4         $match: {
5             ['${nodeType}.id']: new ObjectId(mediaContentId),
6             rating: { $exists: true },
7             date: { $gte: startDate, $lt: endDate }
8         }
9     },
10    // Group stage to group documents by year and calculate the average rating
11    {
12        $group: {
13            _id: { $year: "$date" },
14            average_rating: { $avg: "$rating" }
15        }
16    },
17    // Project stage to shape the output documents
18    {
19        $project: {
20            _id: 0,
21            year: "$_id",
22            average_rating: 1
23        }
24    },
25    // Sort stage to sort documents by year in ascending order
26    {
27        $sort: { year: 1 }
28    }
29 ]);

```

Get Media Content Rating By Month

Retrieves the average ratings for a specific media content (anime or manga) by month for a specified year. The aggregation pipeline performs the following steps:

1. Matches the reviews for the specified media content ID and year, ensuring the reviews have a rating.
2. Groups the reviews by month and calculates the average rating for each month.
3. Projects the results to include the month and the calculated average rating.
4. Sorts the results by month in ascending order.

- Java Implementation:

```

1 public Map<String, Double> getMediaContentRatingByMonth(MediaContentType type, String
    mediaContentId, int year) throws DAOException {
2     try {
3         // Get media content rating by month
4         MongoCollection<Document> reviewCollection = getCollection (COLLECTION_NAME);
5
6         String nodeType = type.equals(MediaContentType.ANIME) ? "anime" : "manga";
7         Date startDate = ConverterUtils.localDateToDate(LocalDate.of(year, 1, 1));
8         Date endDate = ConverterUtils.localDateToDate(LocalDate.of(year + 1, 1, 1));
9         List<Bson> pipeline = List.of(
10             match(and(
11                 eq(nodeType + ".id", new ObjectId(mediaContentId)),
12                 exists("rating", true),
13                 gte("date", startDate),

```

```

14         lt("date", endDate)
15     )),
16     group(new Document("$month", "$date"),
17         avg("average_rating", "$rating")
18     ),
19     project(fields(
20         excludeId(),
21         computed("month", "$_id"),
22         include("average_rating")
23     )),
24     sort(ascending("month"))
25 );
26 List<Document> result = reviewCollection.aggregate(pipeline).into(new ArrayList<>());
27
28 // Initialize the result map with months and default values
29 Map<String, Double> resultMap = new LinkedHashMap<>();
30 for (Month month : Month.values()) {
31     resultMap.put(month.getDisplayName(TextStyle.FULL, Locale.ENGLISH), null);
32 }
33
34 // Populate the result map with the average ratings
35 for (Document document : result) {
36     Object ratingObj = document.get("average_rating");
37     Double averageRating = ratingObj instanceof Integer ratingInt ? ratingInt.
doubleValue() : (Double) ratingObj;
38     Integer month = document.getInteger("month");
39     resultMap.put(Month.of(month).getDisplayName(TextStyle.FULL, Locale.ENGLISH),
averageRating);
40 }
41 return resultMap;
42
43 } catch (MongoException e) {
44     throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
45 } catch (Exception e) {
46     throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
47 }
48 }

```

- Mongo Shell Query:

```

1 db.getCollection.aggregate([
2     {
3         $match: {
4             $and: [
5                 { [nodeType + ".id"]: mediaContentId },
6                 { rating: { $exists: true } },
7                 { date: { $gte: startDate } },
8                 { date: { $lt: endDate } }
9             ]
10        },
11    },
12    {
13        $group: {
14            _id: { $month: "$date" },
15            average_rating: { $avg: "$rating" }
16        },
17    },
18    {
19        $project: {
20            _id: 0,
21            month: "$_id",
22            average_rating: 1
23        },
24    },
25    {
26        $sort: {
27            month: 1
28        }
29    }
30 ]).toArray();

```

Suggest Media Content

Suggests media content (anime or manga) based on user criteria (location or birthday year). The aggre-

gation pipeline performs the following steps:

1. Matches the reviews with a rating, the specified media content type and the user criteria.
2. Groups the reviews by media content ID and calculates the average rating for each media content.
3. Projects the results to include the media content title and the calculated average rating.
4. Sorts the results by average rating in descending order.
5. Limits the results to 20 entries.

- Java Implementation:

```
1 public List<MediaContentDTO> suggestMediaContent(MediaContentType mediaContentType, String
   criteriaType, String criteriaValue) throws DAOException {
2     try {
3         // Suggest media content based on user criteria
4         MongoCollection<Document> reviewCollection = getCollection(COLLECTION_NAME);
5         String nodeType = mediaContentType.equals(MediaContentType.ANIME) ? "anime" : "manga";
6
7         Bson filter = and(
8             exists("rating", true),
9             exists(nodeType, true)
10        );
11
12        if (criteriaType.equals("location")) {
13            filter = and(filter, eq("user.location", criteriaValue));
14        } else if (criteriaType.equals("birthday")) {
15            Date startDate = ConverterUtils.localDateToDate(LocalDate.of(Integer.parseInt(criteriaValue), 1, 1));
16            Date endDate = ConverterUtils.localDateToDate(LocalDate.of(Integer.parseInt(criteriaValue) + 1, 1, 1));
17            filter = and(filter, gte("user.birthday", startDate), lt("user.birthday", endDate)
18        );
19        } else {
20            throw new Exception("ReviewDAOMongoImpl: suggestMediaContent: Invalid criteria type");
21        }
22
23        List<Bson> pipeline = new ArrayList<>(List.of(
24            match(filter),
25            group("$" + nodeType + ".id",
26                first("title", "$" + nodeType + ".title"),
27                avg("average_rating", "$rating")),
28            sort(descending("average_rating")),
29            project(include("title")),
30            limit(20));
31
32        List<Document> result = reviewCollection.aggregate(pipeline).into(new ArrayList<>());
33        if (result.isEmpty()) {
34            throw new MongoException("ReviewDAOMongoImpl: suggestMediaContent: No reviews found");
35        }
36
37        List<MediaContentDTO> entries = new ArrayList<>();
38        for (Document document : result) {
39            String contentId = String.valueOf(document.getObjectId("_id"));
40            String title = document.getString("title");
41
42            MediaContentDTO mediaContentDTO;
43            if (nodeType.equals("anime")) {
44                mediaContentDTO = new AnimeDTO(contentId, title);
45            } else {
46                mediaContentDTO = new MangaDTO(contentId, title);
47            }
48            entries.add(mediaContentDTO);
49        }
50        return entries;
51    } catch (MongoException e) {
52        throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
53    } catch (Exception e) {
54        throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
55    }
56 }
```

- Mongo Shell Query:

```

1 db.collection.aggregate([
2   {
3     // Match documents based on a dynamic user criteria
4     $match: {
5       ["user." + criteriaType]: criteriaValue
6     }
7   },
8   {
9     // Group documents by node type ID and calculate the first title and average rating
10    $group: {
11      _id: "$" + nodeType + ".id", // Group by the node type's ID
12      title: { $first: "$" + nodeType + ".title" }, // Get the first title in the group
13      average_rating: { $avg: "$rating" } // Calculate the average rating for the group
14    }
15  },
16  {
17    // Sort the grouped documents by average rating in descending order
18    $sort: { average_rating: -1 }
19  },
20  {
21    // Limit the number of results to the page size constant
22    $limit: Constants.PAGE_SIZE
23  }
24 ]);

```

MANGA/ANIME:

Get Best Criteria

Retrieves the best criteria based on the average rating of the Anime objects in the MongoDB database.

- Java Implementation:

```

1 public Map<String, Double> getBestCriteria (String criteria, boolean isArray, int page) throws
   DAOException {
2   try {
3     MongoCollection<Document> animeCollection = getCollection(COLLECTION_NAME);
4     int pageOffset = (page - 1) * Constants.PAGE_SIZE;
5
6     List<Bson> pipeline;
7     if (isArray) {
8       pipeline = List.of(
9         match(and(exists(criteria), ne("average_rating", null))),
10        unwind("$" + criteria),
11        group("$" + criteria, avg("criteria_average_rating", "$average_rating")),
12        sort(descending("criteria_average_rating")),
13        skip(pageOffset),
14        limit(25)
15      );
16     } else {
17       pipeline = List.of(
18        match(Filters.exists(criteria)),
19        group("$" + criteria, avg("criteria_average_rating", "$average_rating")),
20        sort(new Document("criteria_average_rating", -1)),
21        skip(pageOffset),
22        limit(25)
23      );
24     }
25
26     List<Document> document = animeCollection.aggregate(pipeline).into(new ArrayList<>());
27
28     Map<String, Double> bestCriteria = new LinkedHashMap<>();
29     for (Document doc : document) {
30       Double avgRating = doc.get("criteria_average_rating") instanceof Integer?
31         doc.getInteger("criteria_average_rating").doubleValue() :
32         doc.getDouble("criteria_average_rating");
33       bestCriteria.put(doc.get("_id").toString(), avgRating);
34     }
35     return bestCriteria;
36   } catch (Exception e) {
37

```

```

38         throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
39     }
40 }

```

- Mongo Shell Query:

```

1 db.collection.aggregate([
2     // Match stage to filter documents where 'criteria' exists and 'average_rating' is not
    null
3     {
4         $match: {
5             criteria: { $exists: true },
6             average_rating: { $ne: null }
7         }
8     },
9     // Unwind stage to deconstruct the 'criteria' array field
10    {
11        $unwind: "$" + criteria
12    },
13    // Group stage to calculate the average rating for each criteria
14    {
15        $group: {
16            _id: "$" + criteria,
17            criteria_average_rating: { $avg: "$average_rating" }
18        }
19    },
20    // Sort stage to sort documents by 'criteria_average_rating' in descending order
21    {
22        $sort: {
23            criteria_average_rating: -1
24        }
25    },
26    // Skip stage to skip the first 'pageOffset' documents
27    {
28        $skip: pageOffset
29    },
30    // Limit stage to limit the results to 25 documents
31    {
32        $limit: 25
33    }
34 ]);

```

GraphDB queries

Some of the most important Neo4j queries for analytic and suggestion purposes.

USERS:

Suggest User By Common Likes

Retrieves a list of suggested users for a specific user based on common likes from the Neo4j database. The method performs the following steps:

1. Retrieve users who like the same media content as the specified user in the last 6 month.
2. Retrieve users who like the same media content as the specified user in the last year.
3. Retrieve users who like the same media content as the specified user.

- Java Implementation:

```
1 public List<UserSummaryDTO> suggestUsersByCommonLikes(String userId, Integer limit,
2     MediaContentType type) throws DAOException {
3     try (Session session = getSession()) {
4         if (type == null) {
5             throw new IllegalArgumentException("Media content type must be specified");
6         }
7
8         int n = limit == null ? 5 : limit;
9         int remaining;
10
11         StringBuilder queryBuilder = new StringBuilder();
12         if (type == MediaContentType.ANIME)
13             queryBuilder.append("MATCH (u:User {id: $userId})-[r:LIKE]->(media:Anime)-[:LIKE]-(suggested:User) ");
14         else
15             queryBuilder.append("MATCH (u:User {id: $userId})-[r:LIKE]->(media:Manga)-[:LIKE]-(suggested:User) ");
16         queryBuilder.append("""
17             WHERE u <> suggested AND r.date >= date($date)
18             WITH suggested, COUNT(DISTINCT media) AS commonLikes
19             WHERE commonLikes > $min
20             RETURN suggested AS user, commonLikes
21             ORDER BY commonLikes DESC
22             LIMIT $n
23             """);
24         String query1 = queryBuilder.toString();
25         Value params1 = parameters("userId", userId, "n", n, "date", LocalDate.now().
26             minusMonths(6), "min", 5);
27
28         List<UserSummaryDTO> suggested = session.executeRead(
29             tx -> tx.run(query1, params1).list()
30         ).stream()
31             .map(this::recordToUserSummaryDTO)
32             .collect(Collectors.toList());
33
34         remaining = n - suggested.size();
35
36         if (remaining > 0) {
37             Value params2 = parameters("userId", userId, "n", n, "date", LocalDate.now().
38                 minusYears(1), "min", 5);
39
40             List<Record> records = session.executeRead(tx -> tx.run(query1, params2).list());
41             for (Record record : records) {
42                 UserSummaryDTO userDTO = recordToUserSummaryDTO(record);
43                 if (!suggested.contains(userDTO))
44                     suggested.add(userDTO);
45                 if (suggested.size() == n)
46                     break;
47             }
48             remaining = n - suggested.size();
49         }
50         if (remaining > 0) {
```

```

51         StringBuilder queryBuilder3 = new StringBuilder();
52         if (type == MediaContentType.ANIME)
53             queryBuilder3.append("MATCH (u:User {id: $userId})-[r:LIKE]->(media:Anime)<-[:LIKE]-(suggested:User) ");
54         else
55             queryBuilder3.append("MATCH (u:User {id: $userId})-[r:LIKE]->(media:Manga)<-[:LIKE]-(suggested:User) ");
56         queryBuilder3.append("""
57             WHERE u <> suggested
58             WITH suggested, COUNT(DISTINCT media) AS commonLikes
59             RETURN suggested AS user, commonLikes
60             ORDER BY commonLikes DESC
61             LIMIT $n
62             """);
63         String query2 = queryBuilder3.toString();
64         Value params3 = parameters("userId", userId, "n", n);
65
66         List<Record> records = session.executeRead(tx -> tx.run(query2, params3).list());
67         for (Record record : records) {
68             UserSummaryDTO userDTO = recordToUserSummaryDTO(record);
69             if (!suggested.contains(userDTO))
70                 suggested.add(userDTO);
71             if (suggested.size() == n)
72                 break;
73         }
74     }
75
76     return suggested.isEmpty() ? null : suggested;
77
78 } catch (Neo4jException e) {
79     throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
80
81 } catch (Exception e) {
82     throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
83 }
84 }

```

- Neo4j Query:

```

1 MATCH (u:User {id: $userId})-[r:LIKE]->(media:Manga)<-[:LIKE]-(suggested:User)
2 WHERE u <> suggested AND r.date >= $date
3 WITH suggested, COUNT(DISTINCT media) AS commonLikes
4 WHERE commonLikes > $min
5 RETURN suggested AS user, commonLikes
6 ORDER BY commonLikes DESC
7 LIMIT $n

```

Suggest Users By Common Followings

Retrieves a list of suggested users for a specific user based on common followings from the Neo4j database. The method performs the following steps:

1. Retrieve users that follow user's followings and have more than 5 common followings.
2. Retrieve users that are followed by user's followings and have more than 5 connections.
3. Retrieve users that follow user's followings.

- Java Implementation:

```

1 public List<UserSummaryDTO> suggestUsersByCommonFollowings(String userId, Integer limit)
   throws DAOException {
2     try (Session session = getSession()) {
3         int n = limit == null ? 5 : limit;
4         int remaining;
5
6         // suggest users that follow user's followings and have more than 5 common followings
7         String query = """
8             MATCH (u:User {id: $userId})-[:FOLLOWS]->(following:User)<-[:FOLLOWS]-(
9             suggested:User)
10            WHERE NOT (u)-[:FOLLOWS]->(suggested) AND u <> suggested
11            WITH suggested, COUNT(DISTINCT following) AS commonFollowings
12            WHERE commonFollowings > 5
13            RETURN suggested as user
            ORDER BY commonFollowings DESC

```

```

14         LIMIT $n
15         """;
16     Value params = parameters("userId", userId, "n", n);
17
18     List<UserSummaryDTO> suggested = session.executeRead(
19         tx -> tx.run(query, params).list()
20     ).stream()
21         .map(this::recordToUserSummaryDTO)
22         .collect(Collectors.toList());
23
24     remaining = n - suggested.size();
25
26     // if there are not enough suggestions, suggest users that are followed by the user's
27     // followings and have more than 5 connections
28     if (remaining > 0) {
29         String query2 = """
30             MATCH (u:User {id: $userId})-[:FOLLOWS]->(following:User)-[:FOLLOWS]->(
31             suggested:User)
32             WHERE NOT (u)-[:FOLLOWS]->(suggested) AND u <> suggested
33             WITH suggested, COUNT(DISTINCT following) AS commonUsers
34             WHERE commonUsers > 5
35             RETURN suggested as user
36             ORDER BY commonUsers DESC
37             LIMIT $n
38             """;
39         Value params2 = parameters("userId", userId, "n", n);
40
41         List<Record> records = session.executeRead(tx -> tx.run(query2, params2).list());
42         for (Record record : records) {
43             UserSummaryDTO userDTO = recordToUserSummaryDTO(record);
44             if (!suggested.contains(userDTO))
45                 suggested.add(userDTO);
46             if (suggested.size() == n)
47                 break;
48         }
49
50         remaining = n - suggested.size();
51
52     // if there are still not enough suggestions, suggest users that follow the user's
53     // followings
54     if (remaining > 0) {
55         String query3 = """
56             MATCH (u:User {id: $userId})-[:FOLLOWS]->(following:User)<-[:FOLLOWS]->(
57             suggested:User)
58             WHERE NOT (u)-[:FOLLOWS]->(suggested) AND u <> suggested
59             WITH suggested, COUNT(DISTINCT following) AS commonFollowings
60             RETURN suggested as user
61             ORDER BY commonFollowings DESC
62             LIMIT $n
63             """;
64         Value params3 = parameters("userId", userId, "n", n);
65
66         List<Record> records = session.executeRead(tx -> tx.run(query3, params3).list());
67         for (Record record : records) {
68             UserSummaryDTO userDTO = recordToUserSummaryDTO(record);
69             if (!suggested.contains(userDTO))
70                 suggested.add(userDTO);
71             if (suggested.size() == n)
72                 break;
73         }
74
75         return suggested.isEmpty() ? null : suggested;
76
77     } catch (Neo4jException e) {
78         throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
79
80     } catch (Exception e) {
81         throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
82     }

```


- Neo4j Query:

```

1 MATCH (u:User {id: $userId})-[:FOLLOWS]->(following:User)-[:FOLLOWS]-(suggested:User)
2 WHERE NOT (u)-[:FOLLOWS]->(suggested) AND u <> suggested
3 WITH suggested, COUNT(DISTINCT following) AS commonFollowers
4 WHERE commonFollowers > 5
5 RETURN suggested as user, commonFollowers
6 ORDER BY commonFollowers DESC
7 LIMIT $n

```

ANIME/MANGA:

Get Trend Media Content By Year

Retrieves a list of trending MangaDTO objects for a specific year from the Neo4j database.

- Java Implementation:

```

1 public Map<MediaContentDTO, Integer> getTrendMediaContentByYear(int year, Integer limit)
   throws DAOException {
2     int n = limit == null ? 5 : limit;
3     try (Session session = getSession()) {
4         LocalDate startDate = LocalDate.of(year, 1, 1);
5         LocalDate endDate = LocalDate.of(year + 1, 1, 1);
6
7         String query = """
8             MATCH (m:Manga)<-[r:LIKE]-(u:User)
9             WHERE r.date >= date($startDate) AND r.date < date($endDate)
10            WITH m, count(r) AS numLikes
11            ORDER BY numLikes DESC
12            RETURN m AS manga, numLikes
13            LIMIT $n
14            """;
15
16         Value params = parameters("startDate", startDate, "endDate", endDate, "n", n);
17
18         Map<MediaContentDTO, Integer> result = new LinkedHashMap<>();
19         session.executeRead(
20             tx -> tx.run(query, params).list()
21         ).forEach(record -> {
22             MangaDTO mangaDTO = (MangaDTO) recordToMediaContentDTO(record);
23             Integer likes = record.get("numLikes").asInt();
24             result.put(mangaDTO, likes);
25         });
26
27         return result;
28     }
29     catch (Neo4jException e) {
30         throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
31     }
32     catch (Exception e) {
33         throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
34     }
35 }

```

- Neo4j Query:

```

1 MATCH (a:Anime)<-[r:LIKE]-(u:User)
2 WHERE r.date >= $startDate AND r.date < $endDate
3 WITH a, count(r) AS numLikes
4 ORDER BY numLikes DESC
5 RETURN a AS anime, numLikes
6 LIMIT $n

```

Get Media Content Trend By Likes

Retrieves a list of trending MangaDTO objects by likes from the Neo4j database. The method performs the following steps:

1. Retrieve the trending Manga by likes in the last 6 months.
2. If there are not enough trending Manga, retrieve more results from the last year.
3. If there are still not enough trending Manga, retrieve more results from the last 5 years.

- Java Implementation:

```

1 public List<MediaContentDTO> getMediaContentTrendByLikes(Integer limit) throws DAOException {
2     try (Session session = getSession()) {
3         int n = limit == null ? 5 : limit;
4         int remaining;
5         LocalDate now = LocalDate.now();
6
7         // Try to get trending content based on likes in the last 6 months
8         String query1 = ""
9             MATCH (u:User)-[r:LIKE]->(m:Manga)
10            WHERE r.date >= date($startDate)
11            WITH m, COUNT(r) AS numLikes
12            WHERE numLikes > 10
13            RETURN m AS manga, numLikes
14            ORDER BY numLikes DESC, m.title ASC
15            LIMIT $n
16            "";
17
18         Value params1 = parameters("startDate", now.minusMonths(6), "n", n);
19         List<MediaContentDTO> trendingContent = session.executeRead(
20             tx -> tx.run(query1, params1).list()
21             ).stream()
22             .map(record -> (MangaDTO) recordToMediaContentDTO(record))
23             .collect(Collectors.toList());
24
25         remaining = n - trendingContent.size();
26
27         // If not enough results, add more results from the last year
28         if (remaining > 0) {
29             Value params2 = parameters("startDate", now.minusYears(1), "n", remaining);
30
31             List<Record> records = session.executeRead(tx -> tx.run(query1, params2).list());
32             for (Record record : records) {
33                 MangaDTO mangaDTO = (MangaDTO) recordToMediaContentDTO(record);
34                 if (!trendingContent.contains(mangaDTO))
35                     trendingContent.add(mangaDTO);
36                 if (trendingContent.size() == n)
37                     break;
38             }
39
40             remaining = n - trendingContent.size();
41         }
42
43         // If still not enough results, add more results from the last 5 years
44         if (remaining > 0) {
45             String query2 = ""
46                 MATCH (u:User)-[r:LIKE]->(m:Manga)
47                 WHERE r.date >= date($startDate)
48                 WITH m, COUNT(r) AS numLikes
49                 RETURN m AS manga, numLikes
50                 ORDER BY numLikes DESC, m.title ASC
51                 LIMIT $n
52                 "";
53             Value params3 = parameters("startDate", now.minusYears(5), "n", remaining);
54
55             List<Record> records = session.executeRead(tx -> tx.run(query2, params3).list());
56             for (Record record : records) {
57                 MangaDTO mangaDTO = (MangaDTO) recordToMediaContentDTO(record);
58                 if (!trendingContent.contains(mangaDTO))
59                     trendingContent.add(mangaDTO);
60                 if (trendingContent.size() == n)
61                     break;
62             }
63         }
64
65         return trendingContent.isEmpty() ? null : trendingContent;
66
67     } catch (Neo4jException e) {
68         throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
69     } catch (Exception e) {
70         throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
71     }
72 }

```

73 }

- Neo4j Query:

```
1 MATCH (u:User)-[r:LIKE]->(a:Anime)
2 WHERE r.date >= $startDate
3 WITH a, COUNT(r) AS numLikes
4 ORDER BY numLikes DESC
5 RETURN a AS anime, numLikes
6 LIMIT $n
```

Get Suggested By Followings

Retrieves a list of suggested MangaDTO objects for a user from the Neo4j database. The method performs the following steps:

1. Retrieve Manga that the user's followings have liked in the last 6 months.
2. If there are not enough suggestions, retrieve Manga that the user's followings have liked in the last 2 years.
3. If there are still not enough suggestions, retrieve Manga that the user's followings have liked.

- Java Implementation:

```
1 public List<MediaContentDTO> getSuggestedByFollowings(String userId, Integer limit) throws
   DAOException {
2     try (Session session = getSession()) {
3         int n = limit == null ? 5 : limit;
4         int remaining;
5         LocalDate now = LocalDate.now();
6
7         // try to get suggestions based on likes in the last 6 months
8         String query1 = ""
9             MATCH (u:User {id: $userId})-[:FOLLOWS]->(f:User)-[r:LIKE]->(m:Manga)
10            WHERE NOT (u)-[:LIKE]->(m) AND r.date >= date($startDate)
11            WITH m, COUNT(DISTINCT f) AS num_likes
12            RETURN m AS manga
13            ORDER BY num_likes DESC, m.title ASC
14            LIMIT $n
15            "";
16         Value params1 = parameters("userId", userId, "n", n, "startDate", now.minusMonths(6));
17
18         List<MediaContentDTO> suggested = session.executeRead(
19             tx -> tx.run(query1, params1).list()
20             ).stream()
21             .map(record -> (MangaDTO) recordToMediaContentDTO(record))
22             .collect(Collectors.toList());
23
24         remaining = n - suggested.size();
25
26         // if there are not enough suggestions, add more results from the last 2 years
27         if (remaining > 0) {
28             Value params2 = parameters("userId", userId, "n", n, "startDate", now.minusYears
29 (2));
30
31             List<Record> records = session.executeRead(tx -> tx.run(query1, params2).list());
32             for (Record record : records) {
33                 MangaDTO mangaDTO = (MangaDTO) recordToMediaContentDTO(record);
34                 if (!suggested.contains(mangaDTO))
35                     suggested.add(mangaDTO);
36                 if (suggested.size() == n)
37                     break;
38             }
39
40             remaining = n - suggested.size();
41
42             // if there are still not enough suggestions, add more results based on all likes
43             if (remaining > 0) {
44                 String query2 = ""
45                     MATCH (u:User {id: $userId})-[:FOLLOWS]->(f:User)-[r:LIKE]->(m:Manga)
46                     WHERE NOT (u)-[:LIKE]->(m)
47                     WITH m, COUNT(DISTINCT f) AS num_likes
48                     RETURN m AS manga
49                     ORDER BY num_likes DESC, m.title ASC
```

```

50         LIMIT $n
51         """;
52         Value params3 = parameters("userId", userId, "n", n);
53
54         List<Record> records = session.executeRead(tx -> tx.run(query2, params3).list());
55         for (Record record : records) {
56             MangaDTO mangaDTO = (MangaDTO) recordToMediaContentDTO(record);
57             if (!suggested.contains(mangaDTO))
58                 suggested.add(mangaDTO);
59             if (suggested.size() == n)
60                 break;
61         }
62     }
63
64     return suggested.isEmpty() ? null : suggested;
65
66 } catch (Neo4jException e) {
67     throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
68
69 } catch (Exception e) {
70     throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
71 }
72 }

```

- Neo4j Query:

```

1 MATCH (u:User {id: $userId})-[:FOLLOWS]->(f:User)-[r:LIKE]->(a:Anime)
2 WHERE NOT (u)-[:LIKE]->(a) AND r.date >= $startDate
3 WITH a, COUNT(DISTINCT f) AS num_likes
4 RETURN a AS anime
5 ORDER BY num_likes DESC
6 LIMIT $n

```

Get Suggested By Likes

Retrieves a list of suggested MangaDTO objects for a user from the Neo4j database. The method performs the following steps:

1. Retrieve Manga that other users with similar taste have liked in the last 6 months.
2. If there are not enough suggestions, retrieve Manga that other users with similar taste have liked in the last 2 years.
3. If there are still not enough suggestions, retrieve Manga that other users with similar taste have liked.

- Java Implementation:

```

1 public List<MediaContentDTO> getSuggestedByLikes(String userId, Integer limit) throws
   DAOException {
2     try (Session session = getSession()) {
3         int n = limit == null ? 5 : limit;
4         int remaining;
5         LocalDate today = LocalDate.now();
6
7         // Try to get suggestions based on likes in the last 6 months
8         String query1 = """
9             MATCH (u:User {id: $userId})-[r1:LIKE]->(m:Manga)<-[:LIKE]-(f:User)
10             WHERE r1.date >= $startDate
11             WITH u, f, COUNT(m) AS common_likes
12             ORDER BY common_likes DESC
13             LIMIT 20
14             MATCH (f)-[:LIKE]->(m2:Manga)
15             WHERE NOT (u)-[:LIKE]->(m2)
16             WITH m2, COUNT(DISTINCT f) AS num_likes
17             RETURN m2 AS manga
18             ORDER BY num_likes DESC, m2.title ASC
19             LIMIT $n
20             """;
21         Value params1 = parameters("userId", userId, "n", n, "startDate", today.minusMonths(6)
22     );
23
24     List<MediaContentDTO> suggested = session.executeRead(
25         tx -> tx.run(query1, params1).list()
26         ).stream()
27         .map(record -> (MangaDTO) recordToMediaContentDTO(record))

```

```

27         .collect(Collectors.toList());
28
29     remaining = n - suggested.size();
30
31     // If there are not enough suggestions, add more results from the last 2 years
32     if (remaining > 0) {
33         Value params2 = parameters("userId", userId, "n", n, "startDate", today.minusYears
(2));
34
35         List<Record> records = session.executeRead(tx -> tx.run(query1, params2).list());
36         for (Record record : records) {
37             MangaDTO mangaDTO = (MangaDTO) recordToMediaContentDTO(record);
38             if (!suggested.contains(mangaDTO))
39                 suggested.add(mangaDTO);
40             if (suggested.size() == n)
41                 break;
42         }
43
44         remaining = n - suggested.size();
45     }
46
47     // If there are not enough suggestions, add more results based on all likes
48     if (remaining > 0) {
49         String query2 = ""
50             MATCH (u:User {id: $userId})-[r1:LIKE]->(m:Manga)<-[:LIKE]-(f:User)
51             WITH u, f, COUNT(m) AS common_likes
52             ORDER BY common_likes DESC
53             MATCH (f)-[:LIKE]->(m2:Manga)
54             WHERE NOT (u)-[:LIKE]->(m2)
55             WITH m2, COUNT(DISTINCT f) AS num_likes
56             RETURN m2 AS manga
57             ORDER BY num_likes DESC, m2.title ASC
58             LIMIT $n
59             "";
60         Value params3 = parameters("userId", userId, "n", n);
61
62         List<Record> records = session.executeRead(tx -> tx.run(query2, params3).list());
63         for (Record record : records) {
64             MangaDTO mangaDTO = (MangaDTO) recordToMediaContentDTO(record);
65             if (!suggested.contains(mangaDTO))
66                 suggested.add(mangaDTO);
67             if (suggested.size() == n)
68                 break;
69         }
70     }
71
72     return suggested.isEmpty() ? null : suggested;
73
74 } catch (Neo4jException e) {
75     throw new DAOException(DAOExceptionType.DATABASE_ERROR, e.getMessage());
76
77 } catch (Exception e) {
78     throw new DAOException(DAOExceptionType.GENERIC_ERROR, e.getMessage());
79 }
80 }

```

- Neo4j Query:

```

1 MATCH (u:User {id: $userId})-[r1:LIKE]->(a:Anime)<-[:LIKE]-(f:User)
2 WHERE r1.date >= $startDate
3 WITH u, f, COUNT(a) AS common_likes
4 ORDER BY common_likes DESC
5 LIMIT 20
6 MATCH (f)-[:LIKE]->(a2:Anime)
7 WHERE NOT (u)-[:LIKE]->(a2)
8 WITH a2, COUNT(DISTINCT f) AS num_likes
9 RETURN a2 AS anime
10 ORDER BY num_likes DESC
11 LIMIT $n

```

Testing

Testing is a substantial part of the MangaVerse web application project. Testing helps to ensure application's reliability, performance and correctness. To be able to conduct efficient testing process, two kind of tests are preformed. They are JUnit testing as a structural testing and functional testing.

Structural Testing

Structural testing also with other name white-box testing is based on testing the internal structure of the working application and it guarantees that the methods are working as expected. JUnit testing framework is used to conduct structural testing. JUnit testing is performed by testing different modules of the application such as DAOs and services. With that process each methods efficiency and correctness is guaranteed. Some examples of JUnit testing are shown below.

Example code snippet from AnimeDAOMongoImplTest:

```
1 class AnimeDAOMongoImplTest {
2
3   @BeforeEach
4   public void setUp() throws Exception {
5       BaseMongoDBDAO.openConnection();
6   }
7
8   @AfterEach
9   public void tearDown() throws Exception {
10       BaseMongoDBDAO.closeConnection();
11   }
12
13   // test 1 : search for an anime by name
14   // test 2 : search for an anime by filters
15   @Test
16   void searchTest() {
17       AnimeDAOMongoImpl animeDAO = new AnimeDAOMongoImpl();
18
19       // test 1
20       System.out.println("Search by title");
21       assertDoesNotThrow(() -> {
22           List<MediaContentDTO> animeList = animeDAO.search(List.of(Pair.of("title", "Attack
23               on Titan")), Map.of("title", 1), 1, false).getEntries();
24           for (MediaContentDTO anime : animeList) {
25               System.out.println("Id: " + anime.getId() + ", Title: " + anime.getTitle());
26           }
27       });
28
29       // test 2
30       System.out.println("Search by filters");
31       assertDoesNotThrow(() -> {
32           for (int i = 1; i < 5; i++) {
33               PageDTO<MediaContentDTO> animePage = animeDAO.search(List.of(Pair.of("$in", Map
34                   .of("tags", List.of("school clubs", "manwha"))), Map.of("title", 1), i, false);
35               if (!animePage.getEntries().isEmpty()) {
36                   for (MediaContentDTO anime : animePage.getEntries()) {
37                       System.out.println("Id: " + anime.getId() + ", Title: " + anime.
38                           getTitle());
39                   }
40               }
41           }
42       });
43   }
44 }
```

Example code snippet from Neo4jDAOImplTest:

```

1 public class Neo4JDAOImplTest {
2
3     @BeforeEach
4     public void setUp() throws Exception {
5         BaseMongoDBDAO.openConnection();
6         BaseNeo4JDAO.openConnection();
7     }
8
9     @AfterEach
10    public void tearDown() throws DAOException {
11        BaseMongoDBDAO.closeConnection();
12        BaseNeo4JDAO.closeConnection();
13    }
14
15    @Test
16    public void testFollowUser() throws DAOException {
17        try {
18            UserDAONeo4JImpl neo4JDAO = new UserDAONeo4JImpl();
19            neo4JDAO.follow("6577877be68376234760585a", "6577877be683762347605859");
20        } catch (DAOException e) {
21            fail("Exception not expected: " + e.getMessage());
22        }
23    }
24
25    @Test
26    public void testUnlikeAnime() throws DAOException {
27        try {
28            AnimeDAONeo4JImpl dao = new AnimeDAONeo4JImpl();
29            dao.unlike("6577877be68376234760585f", "65789bb52f5d29465d0abd09");
30        } catch (DAOException e) {
31            fail("Exception not expected: " + e.getMessage());
32        }
33    }
34 }
35
36

```

Example code snippet from ReviewServiceImpl:

```

1 class ReviewServiceImplTest {
2     private static final ExecutorTaskService aperiodicTaskService = ServiceLocator.
        getExecutorTaskService(ExecutorTaskServiceType.APERIODIC);
3     private static final TaskManager errorTaskManager = ServiceLocator.
        getErrorsTaskManager();
4     @BeforeEach
5     public void setUp() throws Exception {
6         BaseMongoDBDAO.openConnection();
7         BaseNeo4JDAO.openConnection();
8         aperiodicTaskService.start();
9         errorTaskManager.start();
10    }
11
12    @AfterEach
13    public void tearDown() throws Exception {
14        BaseMongoDBDAO.closeConnection();
15        BaseNeo4JDAO.closeConnection();
16        aperiodicTaskService.stop();
17        errorTaskManager.stop();
18    }
19    @Test
20    void updateReview() {
21        ReviewServiceImpl reviewService = new ReviewServiceImpl();
22        try {
23            ReviewDTO reviewAnime = createSampleAnimeReview();

```

```

24         assertDoesNotThrow(() -> reviewService.addReview(reviewAnime));
25         reviewAnime.setComment("This is an updated test review");
26         reviewAnime.setRating(4);
27         assertDoesNotThrow(() -> reviewService.updateReview(reviewAnime));
28         System.out.println("Anime review updated: " + reviewAnime);
29
30         ReviewDTO reviewManga = createSampleMangaReview();
31         assertDoesNotThrow(() -> reviewService.addReview(reviewManga));
32         reviewManga.setComment("This is an updated test review");
33         reviewManga.setRating(4);
34         assertDoesNotThrow(() -> reviewService.updateReview(reviewManga));
35         System.out.println("Manga review updated: " + reviewManga);
36     } catch (BusinessException e) {
37         fail(e);
38     }
39 }
40 }
41

```


Functional Testing

Functional testing also with other name black-box testing is based on testing the application's external functionalities. It checks the application from end-user's perspective. It ensures that specified requirements are provided efficiently by the web application and expected outcome is created. With the help of the use cases and real world scenarios, functional testing is conducted. Some examples of functional testing are shown below.

Table 5.1: Functional Test Cases

| Id | Description | Input | Expected Output | Output | Outcome |
|-----------|--|---|---|---|----------------|
| User_01 | Login with correct information | email: nmiller@example.com, password: f6d6b3ffecb44a... | The user logs in successfully | The user logs in successfully | PASS |
| User_02 | Login with wrong information | email: wrong@example.com, password: wrong | The user is not able to log in successfully | The user is not able to log in successfully | PASS |
| User_03 | Signup with all the mandatory info filled | username: mikasa, email: mikasa@example.com, password: AttackOn..., gender: female | The user is registered successfully and logs in | The user is registered successfully and logs in | PASS |
| User_04 | Signup with missing info | username: eren, password: AttackOn... | The user is not able to register successfully | The user is not able to register successfully | PASS |
| User_05 | Signup with already used username or email | username: Crystal, email: millerderek@example.com | The user is not able to register successfully | The user is not able to register successfully | PASS |
| User_06 | Update user information | description: manga lover | User profile is updated with new info. | User profile is updated with new info. | PASS |
| User_07 | Follow another user | - | User is followed. | User is followed. | PASS |
| User_08 | Follow a user you already follow | - | User is already followed. | User is already followed. | PASS |
| User_09 | Unfollow another user | - | User is unfollowed. | User is unfollowed. | PASS |
| User_10 | Search manga by title | title: "Slam Dunk" | The list of manga which includes the words of "Slam Dunk" is shown. | The list of manga which includes the words of "Slam Dunk" is shown. | PASS |
| User_11 | Search manga by detailed filtering | Genres: adventure, comedy, fantasy. Year: 2018. Demographics: Josei. Publication Status: finished | The list of manga including the filtering details is shown | The list of manga including the filtering details is shown | PASS |
| User_12 | Like anime | - | The anime is liked | The anime is liked | PASS |

| Id | Description | Input | Expected Output | Output | Outcome |
|-----------|--|---|--|--|----------------|
| User_13 | Unlike anime | - | The like is removed from the anime | The like is removed from the anime | PASS |
| User_14 | Add review to anime | review:"I like the anime" | The review is added to the anime and displayed in the anime page | The review is added to the anime and displayed in the anime page | PASS |
| User_15 | Update review | review: "I dont like this anime anymore" | The review is updated with the new one. | The review is updated with the new one. | PASS |
| User_16 | Update review without comment and rating | review: "" | The review is not updated. | The review is not updated. | PASS |
| User_17 | Delete review | - | The review is deleted. | The review is deleted. | PASS |
| Admin_01 | See users distribution analytics | Distribution type:gender,location, birthday,joined on | The distribution is shown | The distribution is shown | PASS |
| Admin_02 | See manga analytics to get average rating by month | Year:2020 | Average rating for each month in 2020 is displayed in the page | Average rating for each month in 2020 is displayed in the page | PASS |
| Admin_03 | See anime analytics to get trend media content by year | Year:2023 | List of anime with a larger amount of likes is displayed | List of anime with a larger amount of likes is displayed | PASS |
| Admin_04 | See anime analytics by criteria | Analytics Type:tags | The highest average ratings for the tags are shown | The highest average ratings for the tags are shown | PASS |

Performance Testing

Performance testing is conducted to ensure that MangaVerse web application is able to handle the a high volume of operations efficiently and provides a smooth experience for users. It is important to test the application's performance to ensure that it can handle the expected load. Performance testing is applied on MongoDB and Neo4j databases. Specifically, the aim of the performance testing is to see the impacts of indexing on CRUD operations and aggregation operations.

MongoDB Performance Testing

Indexes are used in MongoDB to improve the performance of queries. Indexes are used to quickly locate data without having to search every document in a collection. This limiting the search with indexes, results can get with faster response time. For the mongoDB performance testing, *username* is used to indexing Users collection and *title* is used to indexing Anime and Manga collections. The tests are conducted for creating new documents, searching for documents and aggregating documents. As it can be shown in the table below, there are significant improvement in operation times with indexing, especially for search and aggregation tasks

Table 5.2: MongoDB Performance Test Results

| Collection | Operation | Index | Time (ms) | Total Keys Examined | Total Docs Examined |
|------------|-----------|-------|-----------|---------------------|---------------------|
| Users | Insert | No | 3 | - | - |
| | Search | No | 17 | 0 | 10007 |
| | Aggregate | No | 20 | 0 | 10007 |
| | Insert | Yes | 5 | - | - |
| | Search | Yes | 5 | 1 | 1 |
| | Aggregate | Yes | 18 | 1 | 0 |
| Anime | Insert | No | 3 | - | - |
| | Search | No | 88 | 0 | 30113 |
| | Aggregate | No | 32 | 0 | 30113 |
| | Insert | Yes | 3 | - | - |
| | Search | Yes | 10 | 0 | 0 |
| | Aggregate | Yes | 9 | 0 | 0 |
| Manga | Insert | No | 3 | - | - |
| | Search | No | 141 | 0 | 41677 |
| | Aggregate | No | 28 | 0 | 41677 |
| | Insert | Yes | 3 | - | - |
| | Search | Yes | 10 | 1 | 1 |
| | Aggregate | Yes | 12 | 1 | 0 |

Neo4j Performance Testing

Similarly, also for Neo4j database, performance testing is conducted to observe the impacts of indexing on some CRUD operations. Indexing with ids is used for both anime, manga and users nodes. The tests are conducted for creating new nodes and searching for nodes. The test result in the table below shows that indexing has a significant impact on operations in Neo4j database especially for search. Indexing time decreases with using indexes for search tasks because it prevents to check all the nodes in the database.

Table 5.3: Neo4j Performance Test Results

| Collection | Operation | Index | Time (ms) |
|------------|------------------------|-------|-----------|
| Anime | Insert | No | 5 |
| | Insert | Yes | 5 |
| | Search | No | 45 |
| | Search | Yes | 2 |
| Manga | Insert | No | 7 |
| | Continued on next page | | |

Table 5.3 – continued from previous page

| Collection | Operation | Index | Time (ms) |
|------------|-----------|-------|-----------|
| Users | Insert | Yes | 5 |
| | Search | No | 46 |
| | Search | Yes | 9 |
| | Insert | No | 56 |
| | Insert | Yes | 9 |
| | Search | No | 40 |
| | Search | Yes | 3 |

Conclusion

Future Work

In the future, MangaVerse aims to expand its capabilities and enhance user experience through several key initiatives:

- **Enhanced Media Management:** Introduce functionalities for managers to update, add, and delete anime and manga entries. This will empower administrators to keep the platform's content relevant and up-to-date.
- **Advanced User Management:** Implement robust user management features, including the ability to delete user accounts if necessary. This ensures compliance with user data protection regulations and helps maintain a secure and trustworthy community environment.
- **Improved Recommendation System:** Refine personalized recommendation algorithms based on user preferences, viewing history, and community interactions. This will enhance user engagement by providing tailored content suggestions.
- **Analytics and Insights:** Develop comprehensive analytics tools for management purposes. These tools will provide insights into user behavior, content popularity, and platform usage trends. Analytics-driven decisions will guide future development and marketing strategies.
- **Language Settings:** Introduce multilingual support to cater to a global audience. Users will be able to select their preferred language for the platform, enhancing accessibility and user experience.
- **Enhanced Security Measures:** Strengthen security protocols with continuous monitoring and updates. Implement data encryption for all user data, including passwords, both in transit and at rest. Regular security audits and compliance checks will ensure MangaVerse remains a safe and reliable platform for users.
- **Community Engagement Features:** Introduce features to foster community interaction, such as forums, group discussions, and event notifications. These features will encourage active participation among manga and anime enthusiasts, creating a vibrant and supportive community.

Conclusion

MangaVerse represents a dynamic web application dedicated to providing an immersive experience for manga and anime enthusiasts. It has a user-friendly interface and a robust feature set, including media exploration, personalized recommendations, and comprehensive user profiles.

The application offers functionalities for both unregistered user and registered user including manager purposes such as browse media content, personalized recommendations, profile management and analytics checking for management purposes.

Beside the functional requirements, the application has also well-defined development process and architecture using different technologies and techniques. While java is used for main backend development programming language, as a database MongoDB and Neo4j are used

Looking ahead, the future development roadmap emphasizes further refinement of management functionalities, enhancement of security measures, and the implementation of advanced analytics and community engagement features. By prioritizing user satisfaction, data security, and innovative feature development, MangaVerse aims to solidify its potential for manga and anime enthusiasts worldwide.