MLDS 2017 Spring HW2 - Seq2seq & Attention

mldsntu2017@gmail.com

Outline

- Introduction : Video Caption Generation
- Sequence-to-sequence based model: S2VT
- Training Tips
 - Attention
 - Schedule Sampling
 - Beamsearch
- How to reach the baseline?
- Format & Submission Rules
 - Dataset
 - Rules & Format

Video Caption Generation

- Input: A short video
- Output: The corresponding caption that depicts the video

(There are some demos later!!)

- There are several difficulties including:
 - (1) Variable length of I/O
 - (2) Distinct attributes of videos

(In this task, CNN features will be provided!)

Video Caption Generation - Example

Input:



Output:


a man is playing a song on the piano.

- You can refer to the following paper for detailed info:

http://www.cs.utexas.edu/users/ml/papers/venugopalan.ic cv15.pdf

 The original task includes CNN and LSTM, but you can only focus on the structure of LSTM, since the CNN features will be provided.

- The LSTM structure

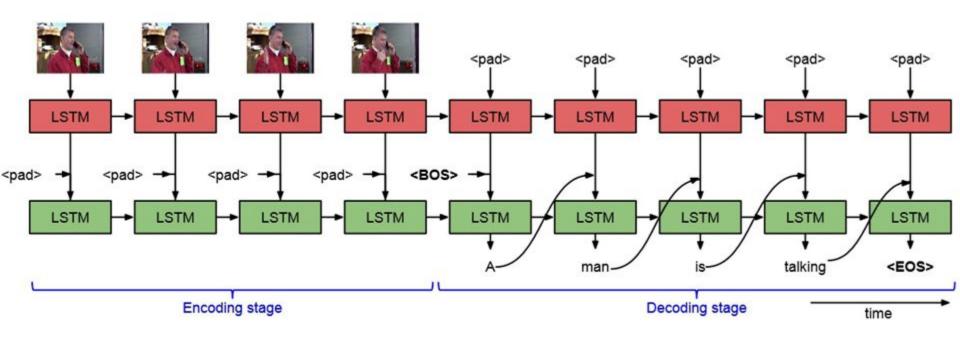

- There are 2 LSTM stacks, the upper one is for encoding, and the bottom one is for decoding.
- Encoding stage:

```
features\rightarrowLSTM1\rightarrowstate h<sub>t</sub>
```

- Decoding stage:

```
state h_t \rightarrow LSTM2 \rightarrow word y_t
```

- Parameter sharing between 2 LSTM stacks can help reduce the complexity.

(Remember to use variable scope in Tensorflow!)

Text Input

One-hot Vector encoding


(a.k.a. 1-to-N coding, where N is the size of the vocabulary)

- e.g.

```
neural = [0, 0, 0, ..., 1, 0, 0, ..., 0, 0, 0]
```


network = [0, 0, 0, ..., 0, 0, 1, ..., 0, 0, 0]

- LSTM unit

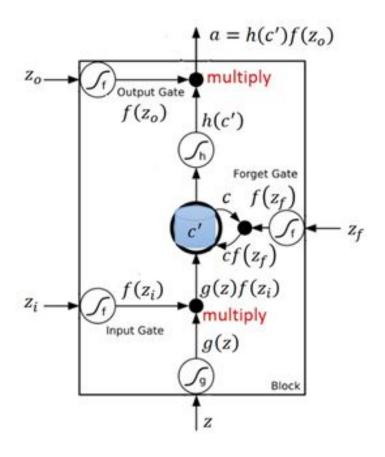


```
\begin{array}{lcl} i_t & = & \sigma(W_{xi}x_t + W_{hi}h_{t-1} + b_i) \\ f_t & = & \sigma(W_{xf}x_t + W_{hf}h_{t-1} + b_f) \\ o_t & = & \sigma(W_{xo}x_t + W_{ho}h_{t-1} + b_o) \\ g_t & = & \phi(W_{xg}x_t + W_{hg}h_{t-1} + b_g) \\ c_t & = & f_t \odot c_{t-1} + i_t \odot g_t \\ h_t & = & o_t \odot \phi(c_t) \end{array}
```

Attention Model

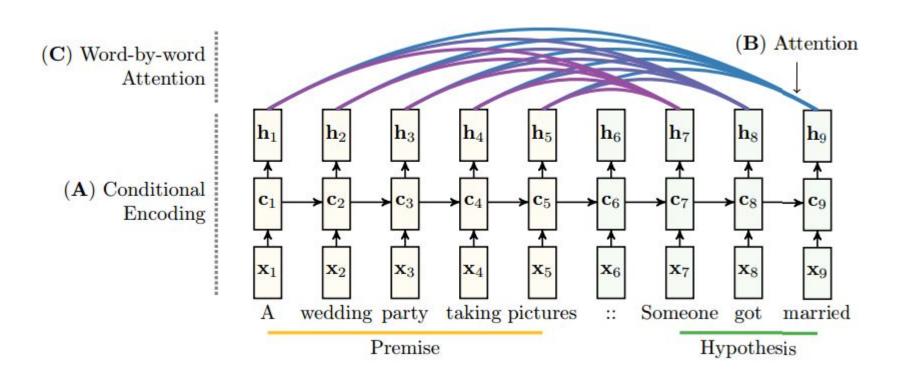

https://arxiv.org/pdf/1509.06664.pdf http://www.aclweb.org/anthology/D15-1166

Schedule Sampling

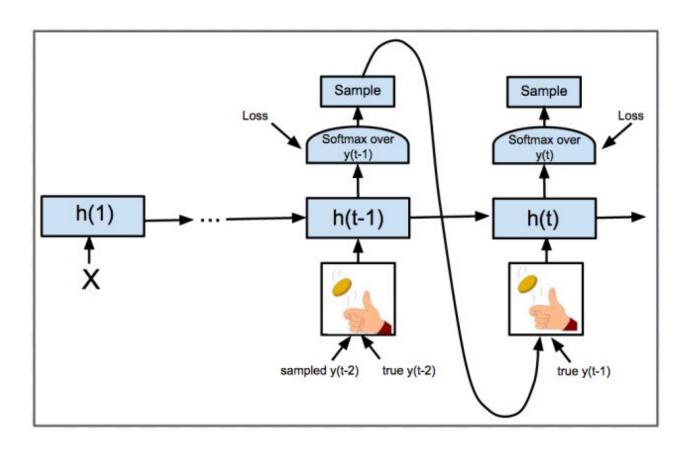

Beamsearch



Beamsearch


Demo:

http://dbs.cloudcv.org/captioning

Normal beamsearch : (Groups=1)

How to reach the baseline?

S2VT model:

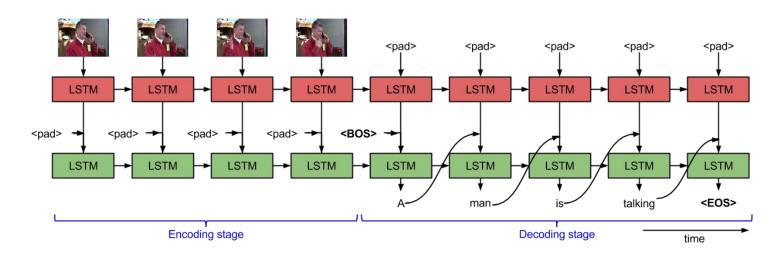

- Training Epoch = 2000
- LSTM dimension = 256
- Learning rate = 0.001
- vocab size = 3000

- AdamOptimizer
- Training time = 72 mins, by using 960 TX

Baseline BLEU@1= 0.25 (Captions Avg.)

Evaluation - BLEU@1

Precision = correct words / candidate length

$$BP = \begin{cases} 1 & \text{if } c > r \\ e^{(1-r/c)} & \text{if } c \le r \end{cases}$$

where c = candidate length, r = reference length

How to reach the baseline?

Demo:



Ground Truth: *a person is slicing a tomato*Prediction: *a man is slicing a tomato pieces*

BLEU@1:1*5/7 = 0.714

How to reach the baseline?

Demo:



Ground Truth: a man is mowing a lawn

Prediction: a man is riding a man on a woman is riding a motorcycle

BLEU: 1 * 4/13 = 0.308

Homework 2 package

MSVD Dataset:

- training_data/: 1450 films's frame feature
- testing_data/: 50 public testing film's frame feature
 - Dimension of each frame = 80*4096
- training_label.json: 1450 films's id and corresponding captions
- testing_public_label.json : 50 public testing films's id and captions
- testing_id.txt: the example file will input to testing script

Evaluation tool:

- bleu_eval.py
 - usage: python bleu_eval.py <candidate_sentence> <reference_sentence>

Download link: http://speech.ee.ntu.edu.tw/~yangchiyi/MLDS_hw2/MLDS_hw2_data.tar.gz

Submission on Github

- Only Python with Tensorflow r1.0 (TAs will run your code in Tensorflow-only environment).
- Deadline: 4/27(Thu.) 23:59:59 (UTC+8)
- MLDS2017/hw2 should contain all the things you use.
 Ex. run.sh, model, report.pdf, etc.
 If some files are too big, upload to your cloud and write a script to download them. Remember to call the download script in run.sh.
- run.sh must output in **10 minutes**.
- Usage: bash run.sh [testing id file] [feature path]

Output format

- Command: 'bash run.sh <testing_list.txt> <feature path> '
 - Your captions of videos should be saved as a json file named 'output.json'
 - Format of *output.json*: list of dictionary with two keys 'caption' and 'id'
 - Your caption should be separated by the space among words and no need to output '<EOS>' or ' . '
 - *output.json* should be placed at the **same path** as *run.sh*

 Every steps including downloading your model and testing process should be written in *run.sh*

Submission on Github

- You must create two branches master and best.
- master stores the model by using only S2S with attention (external data is not allowed)
- **best** stores your best model. If your best model is the same as your baseline model, just copy all files in master to this branch.
- The format is mentioned in the previous slide.
- You have to specify the best performance you achieved by using only S2S with attention in the experiment part of your report.

Grading Policy (30%)

- Format 2%
- Code 4% (S2S 2% + attention 2%)
- Baseline 4% (public 2% + private 2%)
- Report 15%
- 各組互評 5%
- Bonus
 - 互評前三名 (5% 3% 1%)
 - You have to present how you beat other teams to get bonus.
 - 限時任務 1%

What report should cover?

- Environment (1%)
 - Ex. OS, CPU, GPU, Memory, libraries you used and version, etc.
- Model description (3%)
- How do you improve your performance (5%)
- Experiment settings and observation (5%)
- Team division (1%)
- No more than 4 pages
- Please written in Chinese (unless you don't know how to type Chinese)

Other Policy

- Late policy: 30% off per day late afterwards.
 [Delay form will be announced afterwards]
- No plagiarism is allowed.
- Use the given data only, except for pre-trained word embedding (you should specify the source in your report).