Class diagram - implemented MVC

The new types follow the shared branch packages; existing authentication and HTTP routes are preserved.

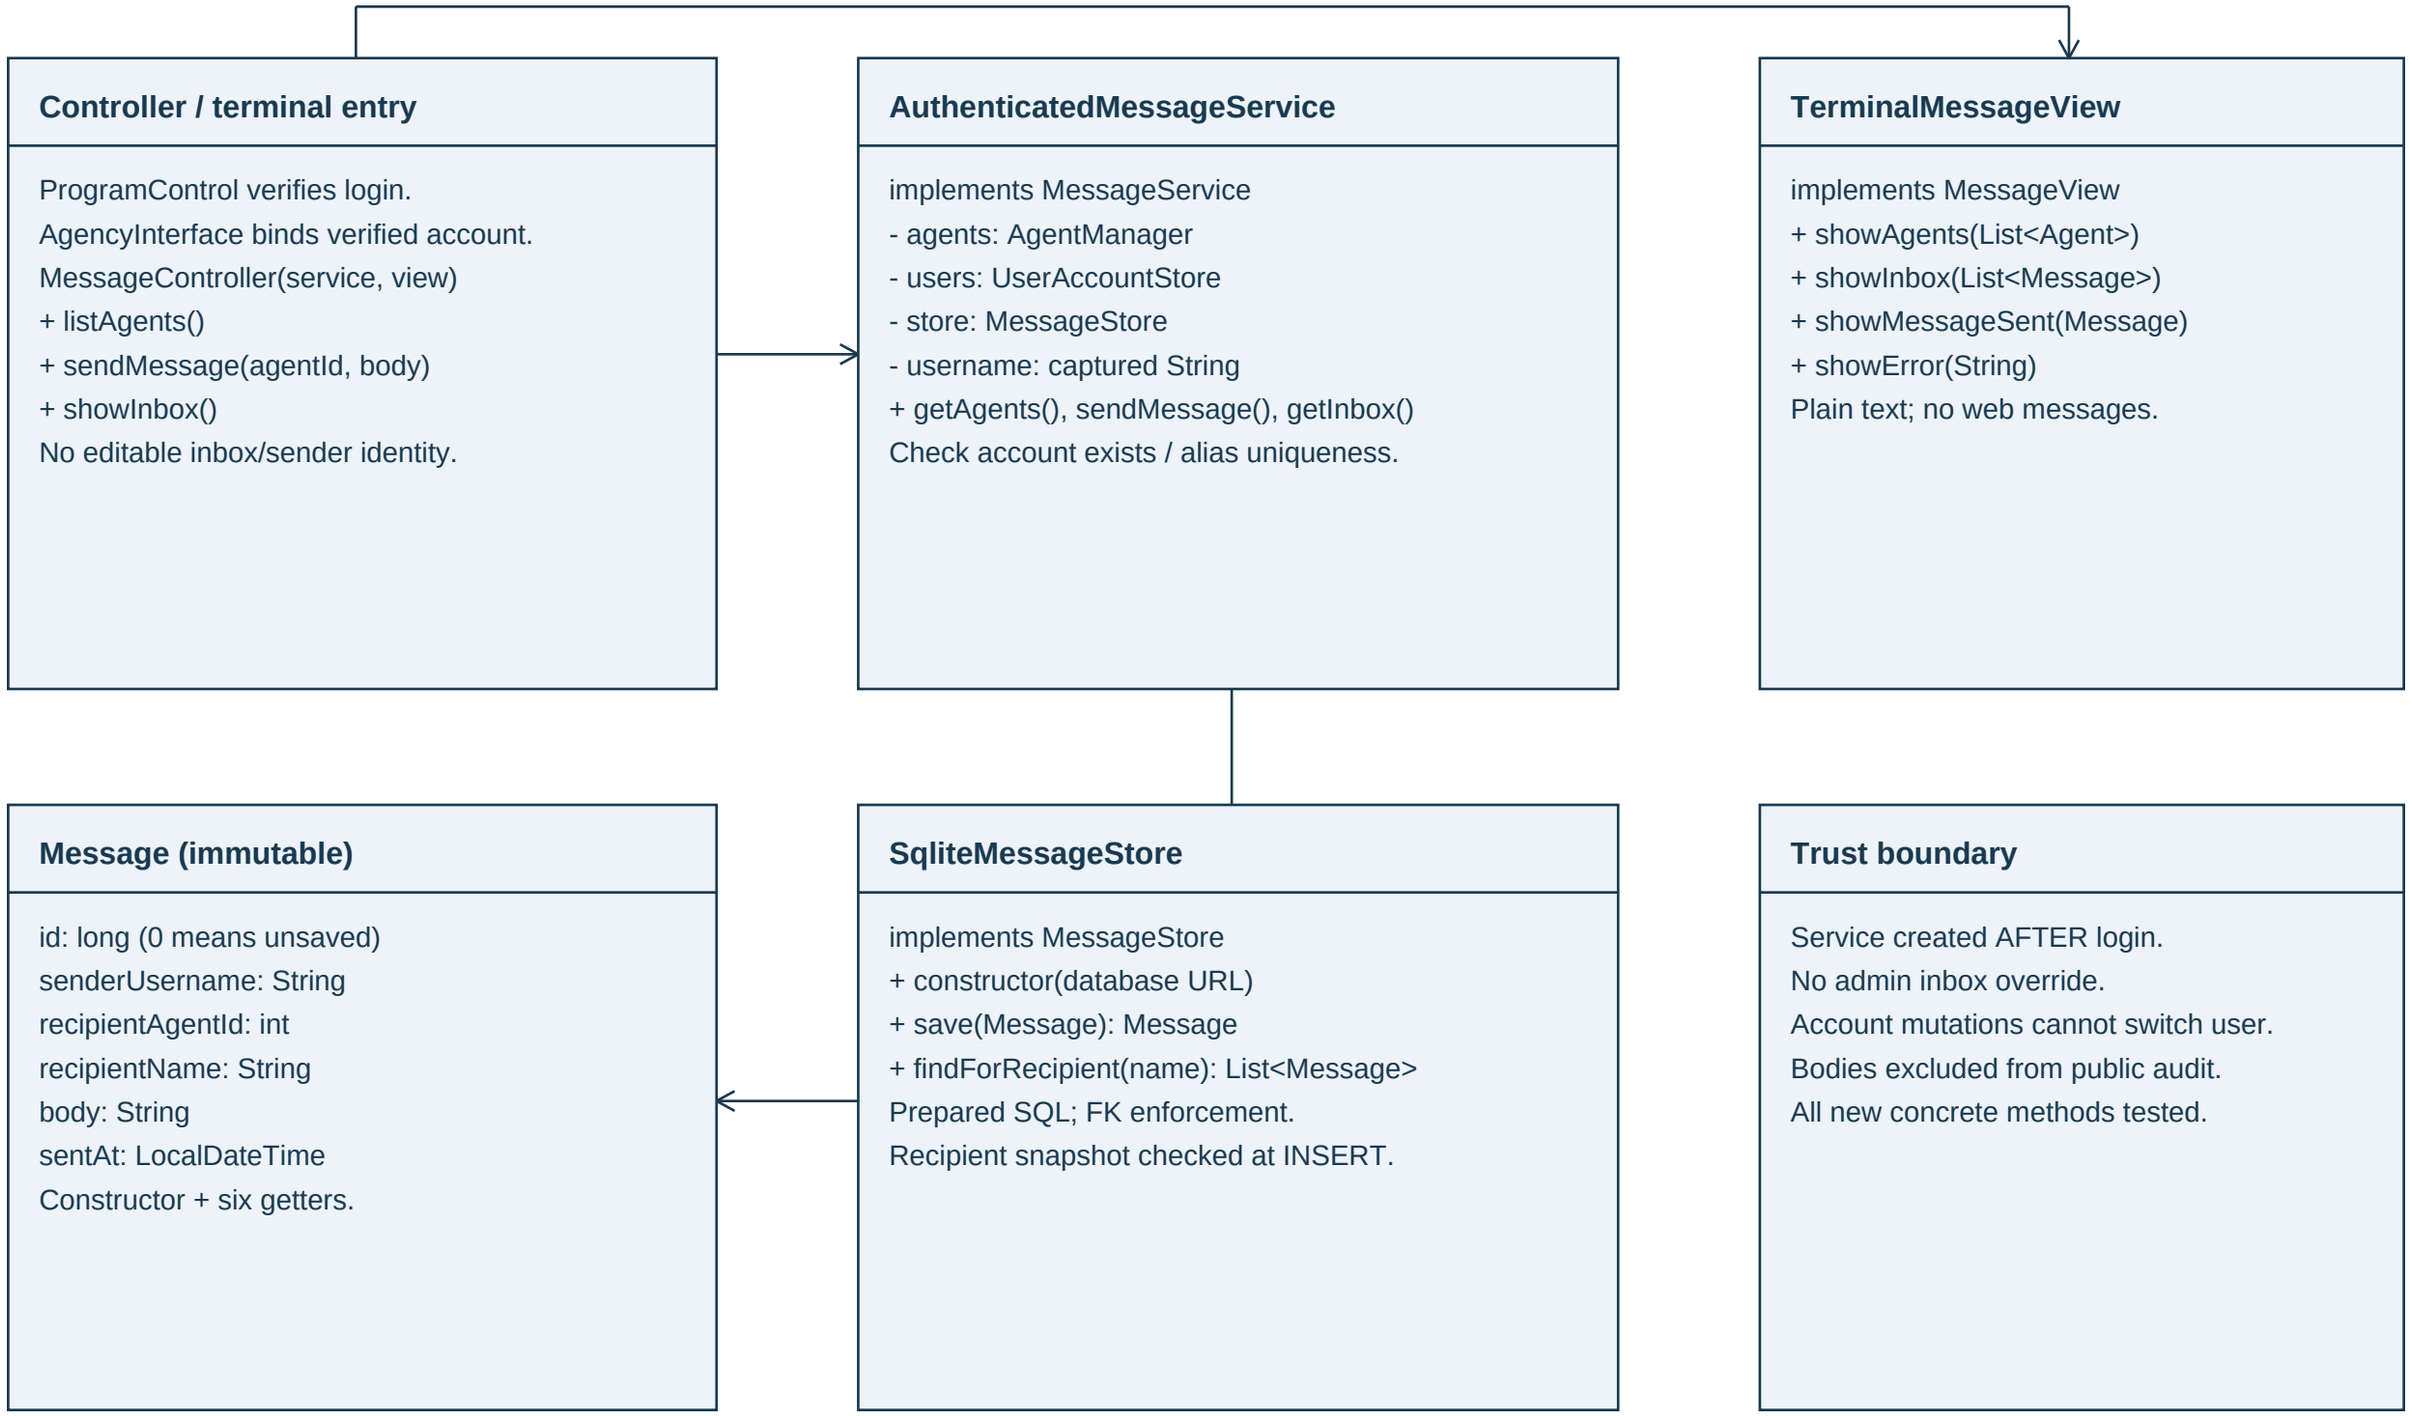

ERD - additive message storage

Existing users and agents remain owned by their managers. Recipient accounts may be created after delivery.

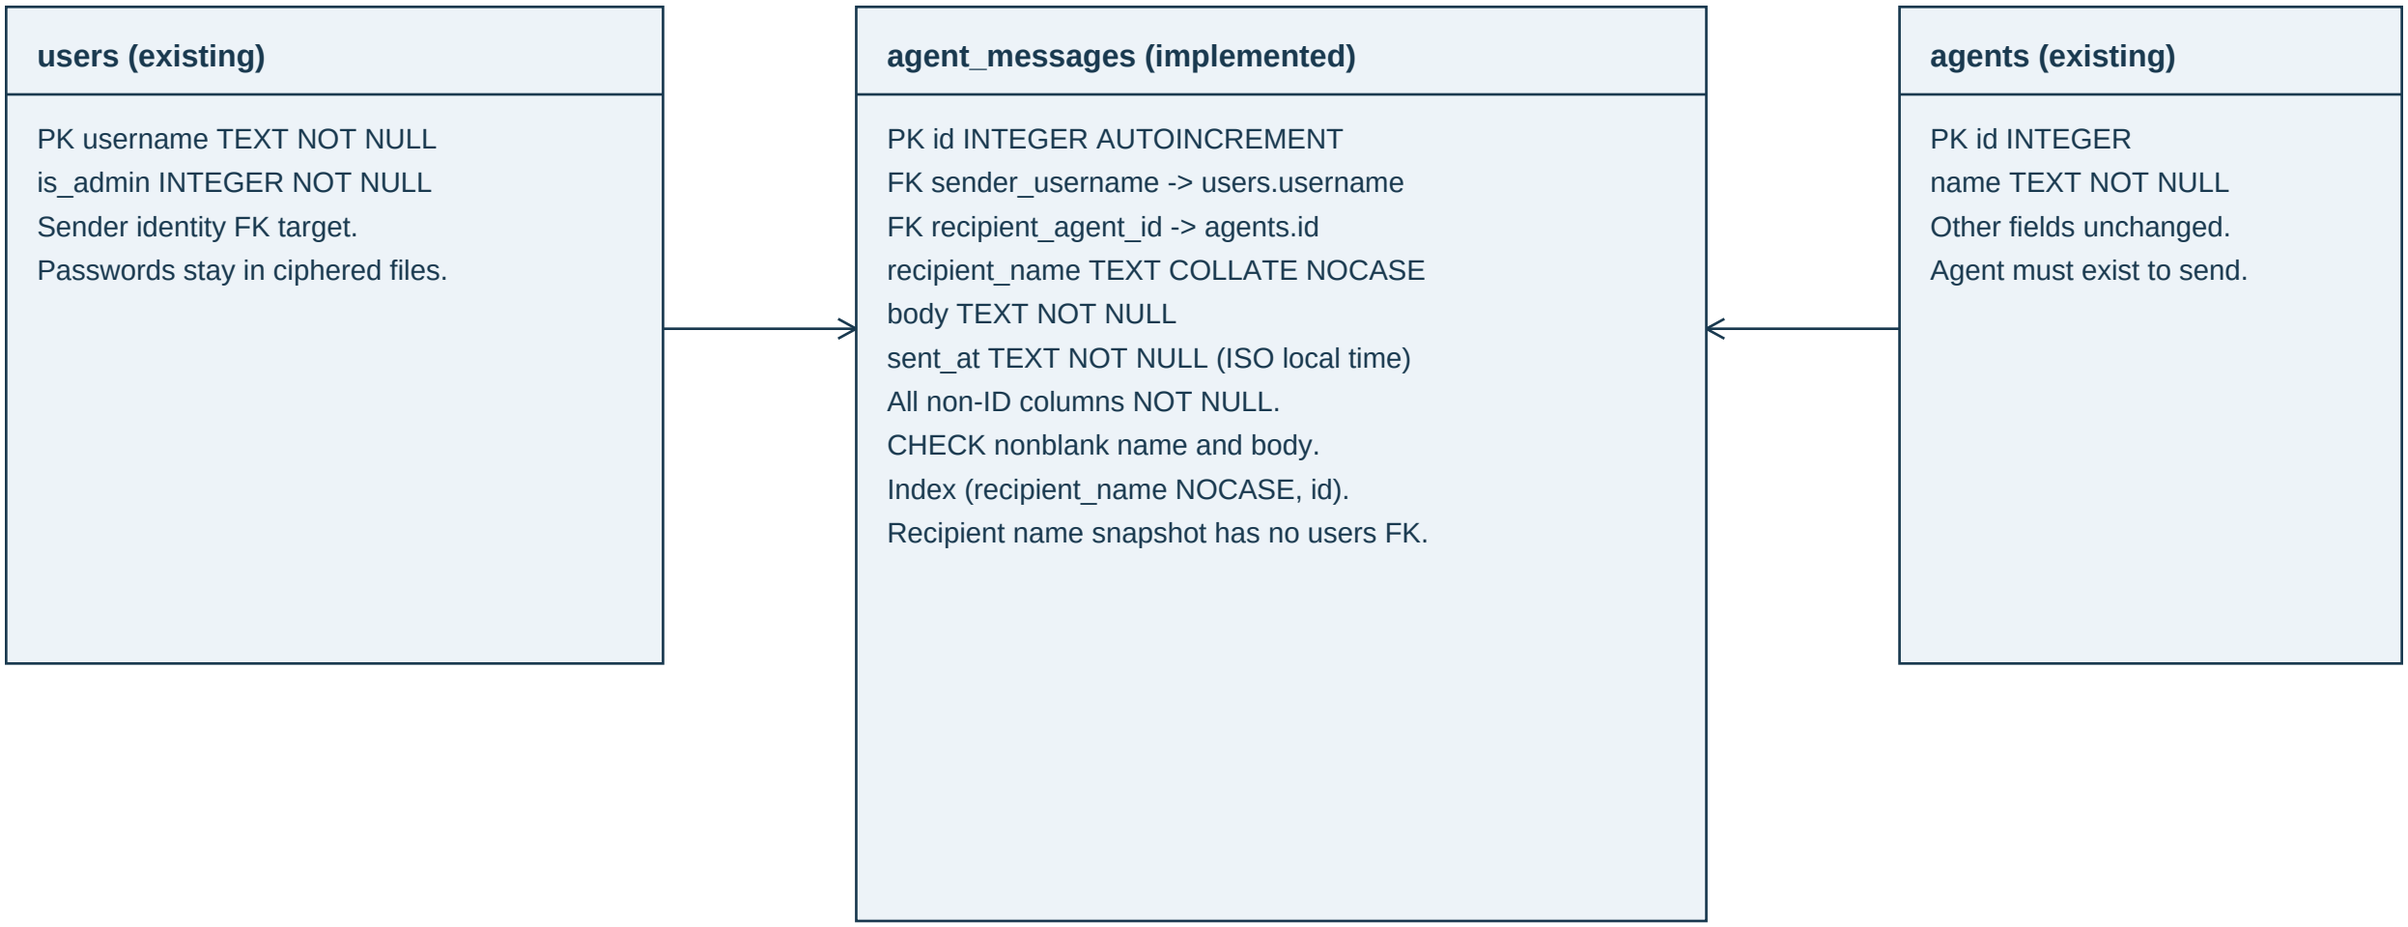

Identity and retention

A recipient username matches the agent-name snapshot ignoring ASCII case. Ambiguous legacy accounts are denied.
No admin bypass. Generated IDs determine inbox order. Foreign keys use default NO ACTION; no cascading deletion.
Renaming an agent does not transfer old messages. Shared accounts and content schema are not rewritten.

Wireframes - implemented terminal workflow

Messages remain terminal-only. The shared read-only web interface has no message route or compose form.

1. Authenticated menu

Signed in: sender
1. Briefs / 2. Agents / 3. Facilities
4. Create User
7. Change Password
8. Send an agent message
9. My messages
0. Exit
Admin options remain unchanged.

2. Select / write

Agents:
1. Ghost
Agent ID: 1
Write message; . sends; /cancel cancels.
Meet at dawn
Bring the file.
.
Message sent to Ghost.

3. Log in as ghost

9. My messages
From: sender | To: Ghost | Sent: ...
Meet at dawn
Bring the file.

Other accounts: no messages.
Regular users can read their inbox.

Failure and cancellation behavior

Blank message / nonexistent agent: validation error and no success confirmation.
/cancel or input EOF: no partial message saved. Database failure: safe failure text; no delivery confirmed.
A deleted account or ambiguous case-duplicate username cannot open an inbox.
Existing web authentication, session cookie, record rendering and audit pages are unchanged.