
Top Secret - Model and terminal class diagram

Current implementation snapshot

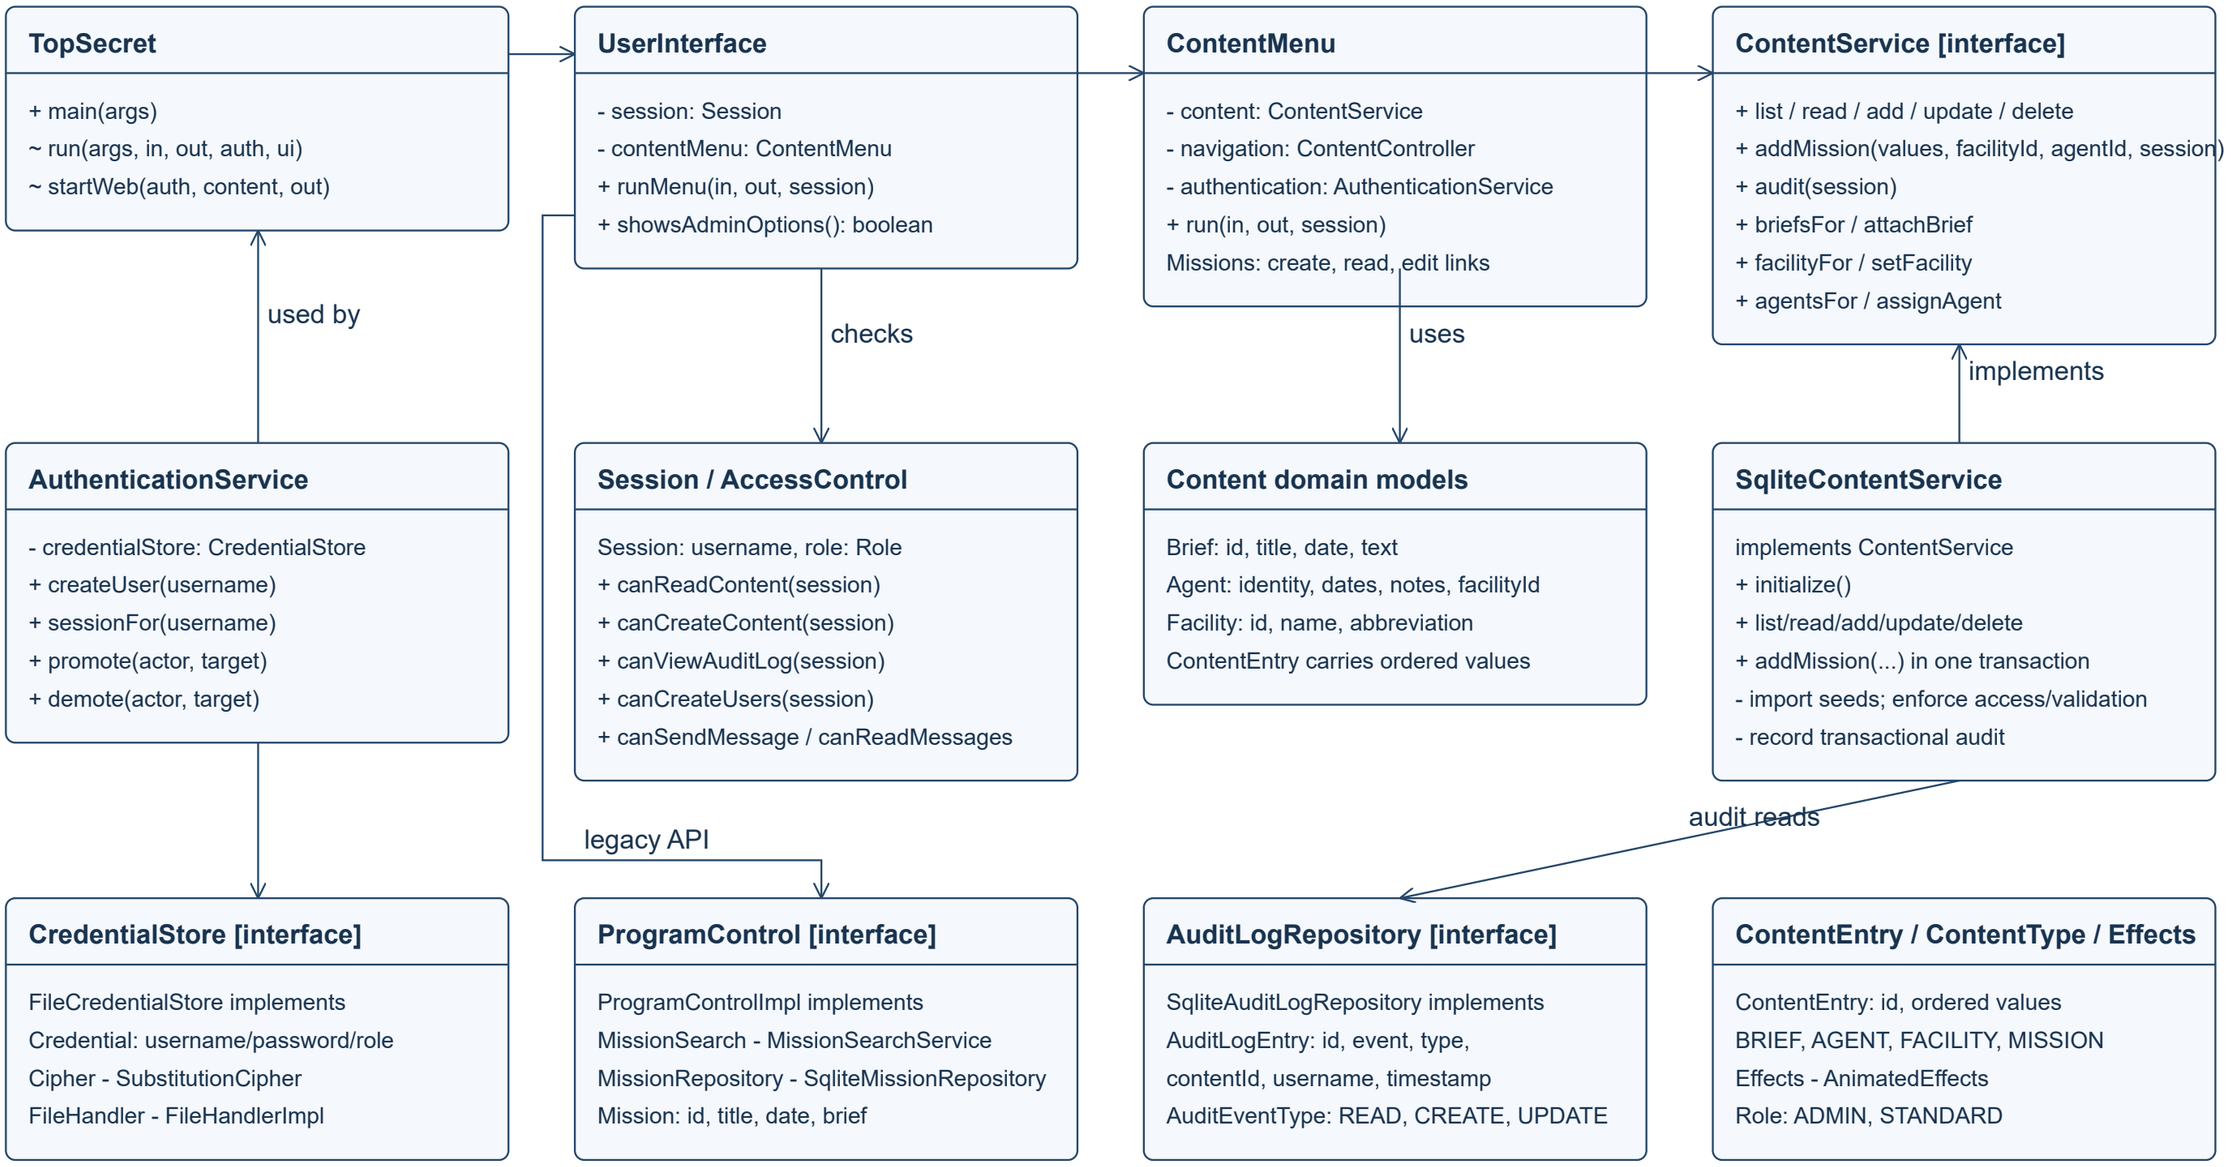

See interface-design.txt and content-model.txt for contracts, integrity rules and regression steps.

Top Secret - MVC and HTTP controller classes

TopSecret starts terminal or web mode

renders HTML

controller.HttpWebServer

implements WebServerController
+ start(): void; address(): InetSocketAddress
+ close(): void
- route / login / parameters / sessionToken

uses

controller.ContentController

+ sessionFor(username): Session
+ canViewAudit(session): boolean
+ list(type, session): List<ContentEntry>
+ read(type, id, session): ContentEntry
+ audit(session): List<AuditLogEntry>
+ facilityFor / agentsFor / briefsFor

view.HtmlView / ContentText

HtmlView: login / menu / list
record / audit / error
Link / Field / AuditRow display data
ContentText: terminal text + list titles

uses auth

uses sessions

uses model

controller.StoredWebAuthentication

implements WebAuthentication
+ hasAccounts(): boolean
+ authenticate(user, password): Optional<String>

controller.InMemoryWebSessionStore

implements WebSessionStore
+ create(user): String
+ usernameFor(token): Optional<String>
+ invalidate(token): void; clear(): void
SecureRandom + ConcurrentHashMap

model services / view adapters

AuthenticationService / Session / AccessControl
ContentService / SqliteContentService
view.ContentMenu uses ContentController
ContentNotFoundException extends
controller.ProgramControlException

controller: LaunchMode {TERMINAL, WEB, CHANGE_PASSWORD}; fromArguments(args): LaunchMode


WebServerController: PORT=3002; SESSION_COOKIE=TopSecretSession; extends AutoCloseable

Session cookies have no Expires/Max-Age at login. Logout/restart invalidate in-memory sessions.

Model owns access rules; the web controller supplies display data to HtmlView.

Web editing - controller contracts and planned wiring

Homework 7 / Member B / Week 1 - design supplement, November 10, 2026

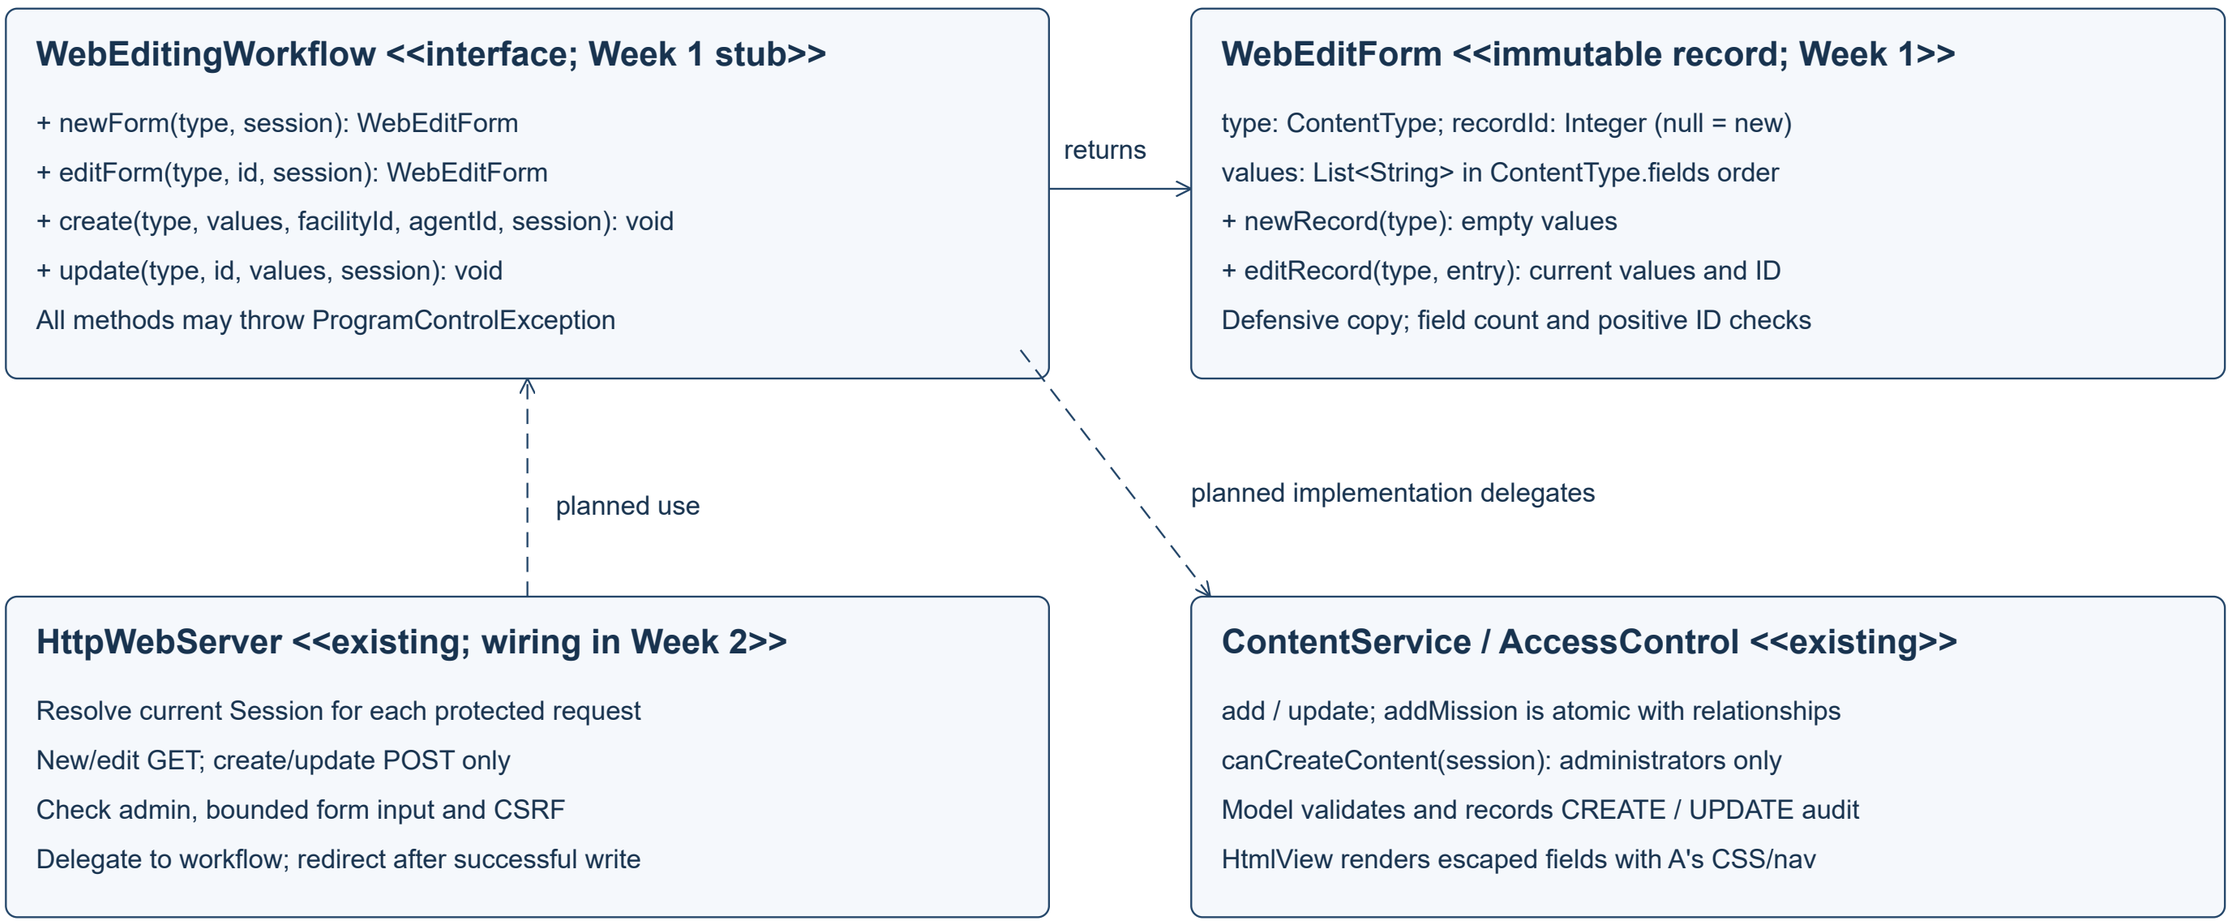

Interface has no implementation yet; running HTTP server remains read-only.

Country support depends on A/D. No user-account editing or new credential/session store.

Solid arrow: return type. Dashed arrows: planned runtime dependencies, not active code.

Existing system classes and relationships are retained on the preceding pages.