



Configuraciones en base de datos Sql Server

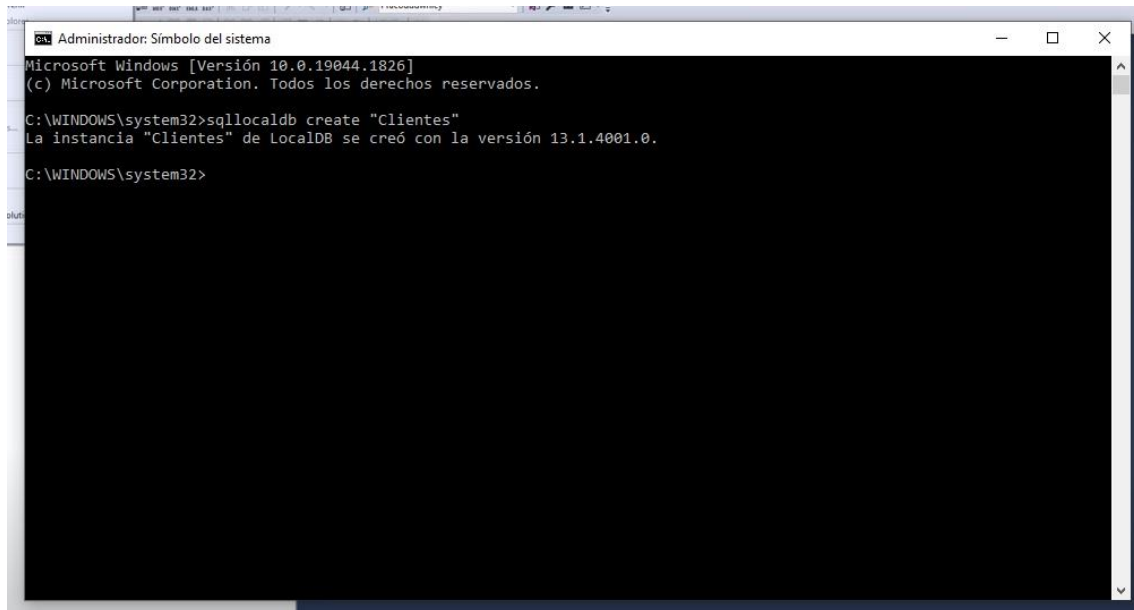

```
Administrador: Símbolo del sistema
Microsoft Windows [Versión 10.0.19044.1826]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\WINDOWS\system32>sqllocaldb create "Clientes"
La instancia "Clientes" de LocalDB se creó con la versión 13.1.4001.0.

C:\WINDOWS\system32>
```

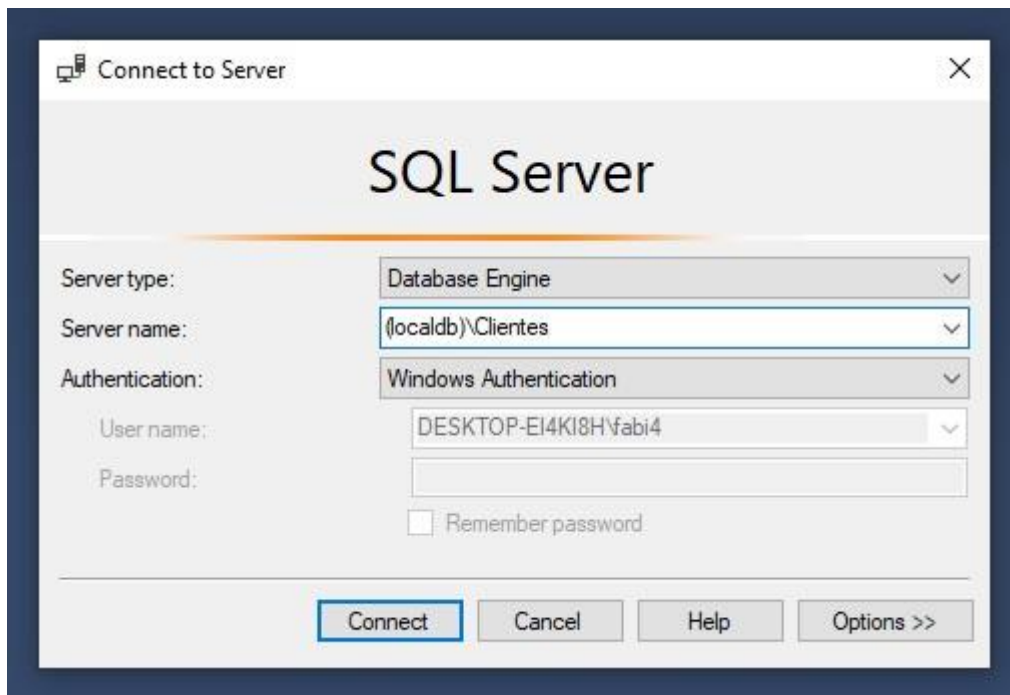

Connect to Server

SQL Server

Server type: Database Engine

Server name: (localdb)\Clientes

Authentication: Windows Authentication

User name: DESKTOP-EI4KI8H\fab4

Password:

☐ Remember password

Connect Cancel Help Options >>

Login - New

Select a page

General

Server Roles

User Mapping

Securables

Status

Connection

Server:

DESKTOP-EI4KI8H\LOCALDB#6

Connection:

DESKTOP-EI4KI8H\Fabi4

View connection properties

Progress

Ready

Script Help

Login name:

Cientes

Search...

☐ Windows authentication
 ☒ SQL Server authentication

Password:

.....

Confirm password:

.....

☐ Specify old password

Old password:

☒ Enforce password policy
 ☒ Enforce password expiration
 ☒ User must change password at next login

☐ Mapped to certificate

☐ Mapped to asymmetric key

☐ Map to Credential

Mapped Credentials

Credential	Provider

Add

Remove

Default database:

Cientes

Default language:

<default>

OK

Cancel

	Column Name	Data Type	Allow Nulls
🔑	Id	int	<input type="checkbox"/>
	Nombres	nvarchar(50)	<input type="checkbox"/>
	Apellidos	nvarchar(50)	<input type="checkbox"/>
	FechaNacimiento	date	<input checked="" type="checkbox"/>
	Cuit	nvarchar(50)	<input type="checkbox"/>
	Domicilio	nvarchar(50)	<input checked="" type="checkbox"/>
	TelefonoCelular	nvarchar(50)	<input type="checkbox"/>
	Email	nvarchar(50)	<input type="checkbox"/>
			<input type="checkbox"/>

Configuraciones en proyecto

```
Consola del Administrador de paquetes

Origen del paquete: Todo Proyecto predeterminado: ApiAbmClientes

PM> Scaffold-DbContext -connection "Data Source=(localdb)\Clientes;Initial Catalog=Clientes;Persist Security Info=True;User=Microsoft.EntityFrameworkCore.SqlServer -OutputDir "Models" -Tables "Cliente" -DataAnnotations
```

```
Startup.cs* CientesContext.cs
ApiAbmClientes ApiAbmClientes.Startup Configure(IApplicat...

0 referencias
20 public Startup(IConfiguration configuration)
21 {
22     Configuration = configuration;
23 }
24
25 2 referencias
26 public IConfiguration Configuration { get; }
27
28 // This method gets called by the runtime. Use this method to add services to the container.
29 0 referencias
30 public void ConfigureServices(IServiceCollection services)
31 {
32     var connection = Configuration.GetConnectionString("DefaultConnection");
33     services.AddDbContextPool<ClientesContext>(options => options.UseSqlServer(connection));
34
35     services.AddControllers();
36 }
```

```
appsettings.json* Startup.cs* CientesContext.cs
Esquema: https://json.schemastore.org/appsettings.json

1 {
2   "ConnectionStrings": {
3     "DefaultConnection": "data source=(localdb)\Clientes;initial catalog=Clientes;persist security info=True;user id=Clientes;password=Clientes;MultipleActiveResultSets=true"
4   },
5   "Logging": {
6     "LogLevel": {
7       "Default": "Information",
8       "Microsoft": "Warning",
9       "Microsoft.Hosting.Lifetime": "Information"
10    },
11  },
12  "AllowedHosts": "*"
13 }
14
```

