

# Ist das Kunst oder kann das weg?

## Ein Experiment mit KI-generierten Chorälen

Fabian C. Moss

Media Studies Department & Data Science Centre, University of Amsterdam

*author1hash=4b40b00e0a47680aee88c08a5efb1f93family=Yust,familyi=Y.,given=Jason,giveni=J.*

Ist das Kunst oder kann das weg?

Ein Experiment mit KI-generierten Chorälen

# Ist das Kunst oder kann das weg?


## Ein Experiment mit KI-generierten Chorälen

Fabian C. Moss

Media Studies Department & Data Science Centre, University of Amsterdam

### Basic Principles

Melodies of aṭṭalāp performances can be understood as the result of **recursive elaboration** of notes and intervals.

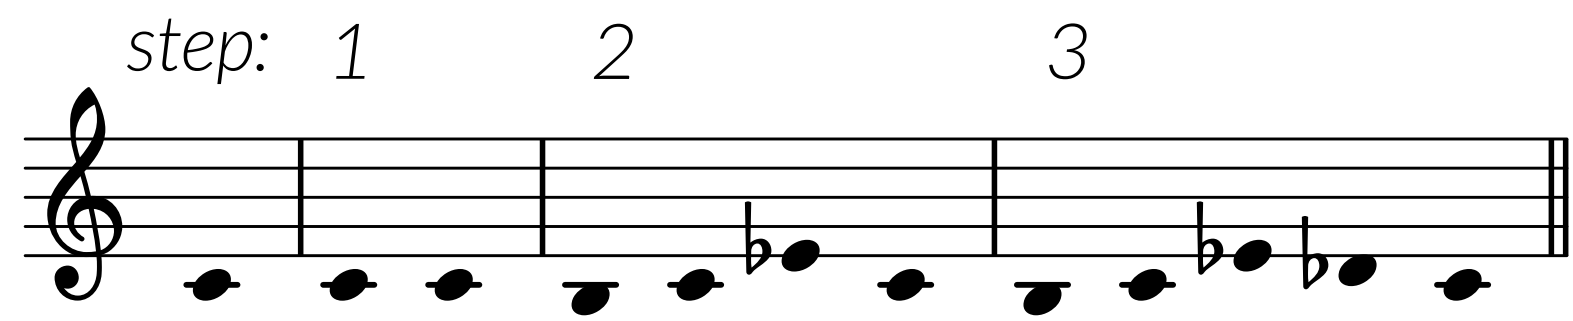


A melody derived in three steps.

Elaborations of notes include **duplication** (1) and left or right **neighbors** (2). Interval elaborations include **passing notes** (3) and **linear fills**.

### Modes and Tonal Hierarchy

A mode is a scale together with a **hierarchy of stability** among the scale degrees and restrictions on their **movement direction**.

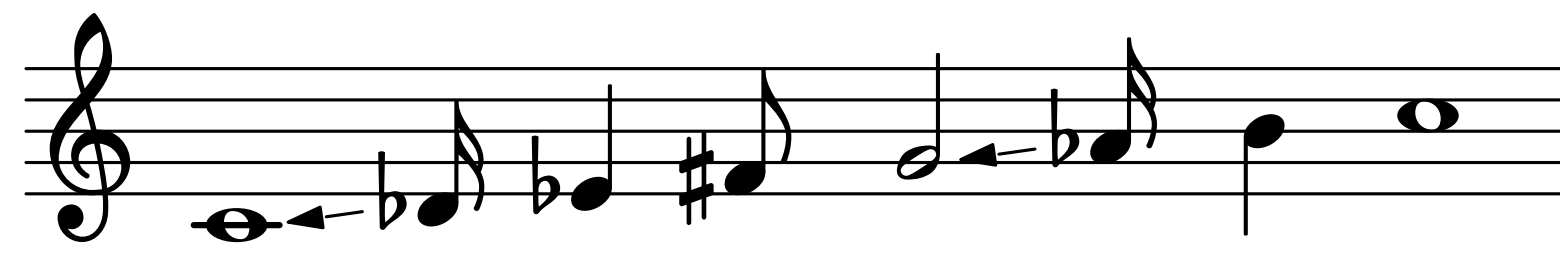


The tonal hierarchy of raṭga Multaṇiṭ.

pitch	1	b2	b3	#4	5	b6	7
direction	↑	↓	↑	↑	↑	↓	↑
stability	4	0	2	1	3	0	2


### Distant Neighbors

Neighbors and passing notes can be **non-adjacent** if they respect the tonal hierarchy of the mode.

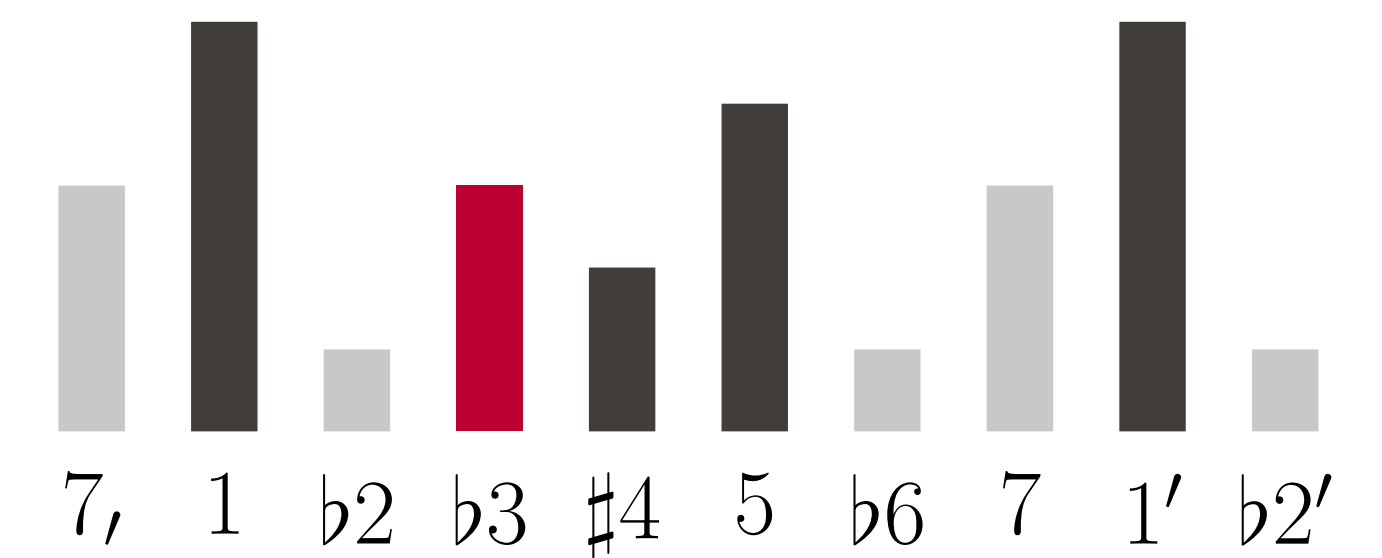

The generalized neighbors of b3 (dark).

A pitch  $p_n$  is a **generalized neighbor** of some pitch  $p$  if no pitch between  $p$  and  $p_n$  is more stable than  $p$  and  $p_n$ .

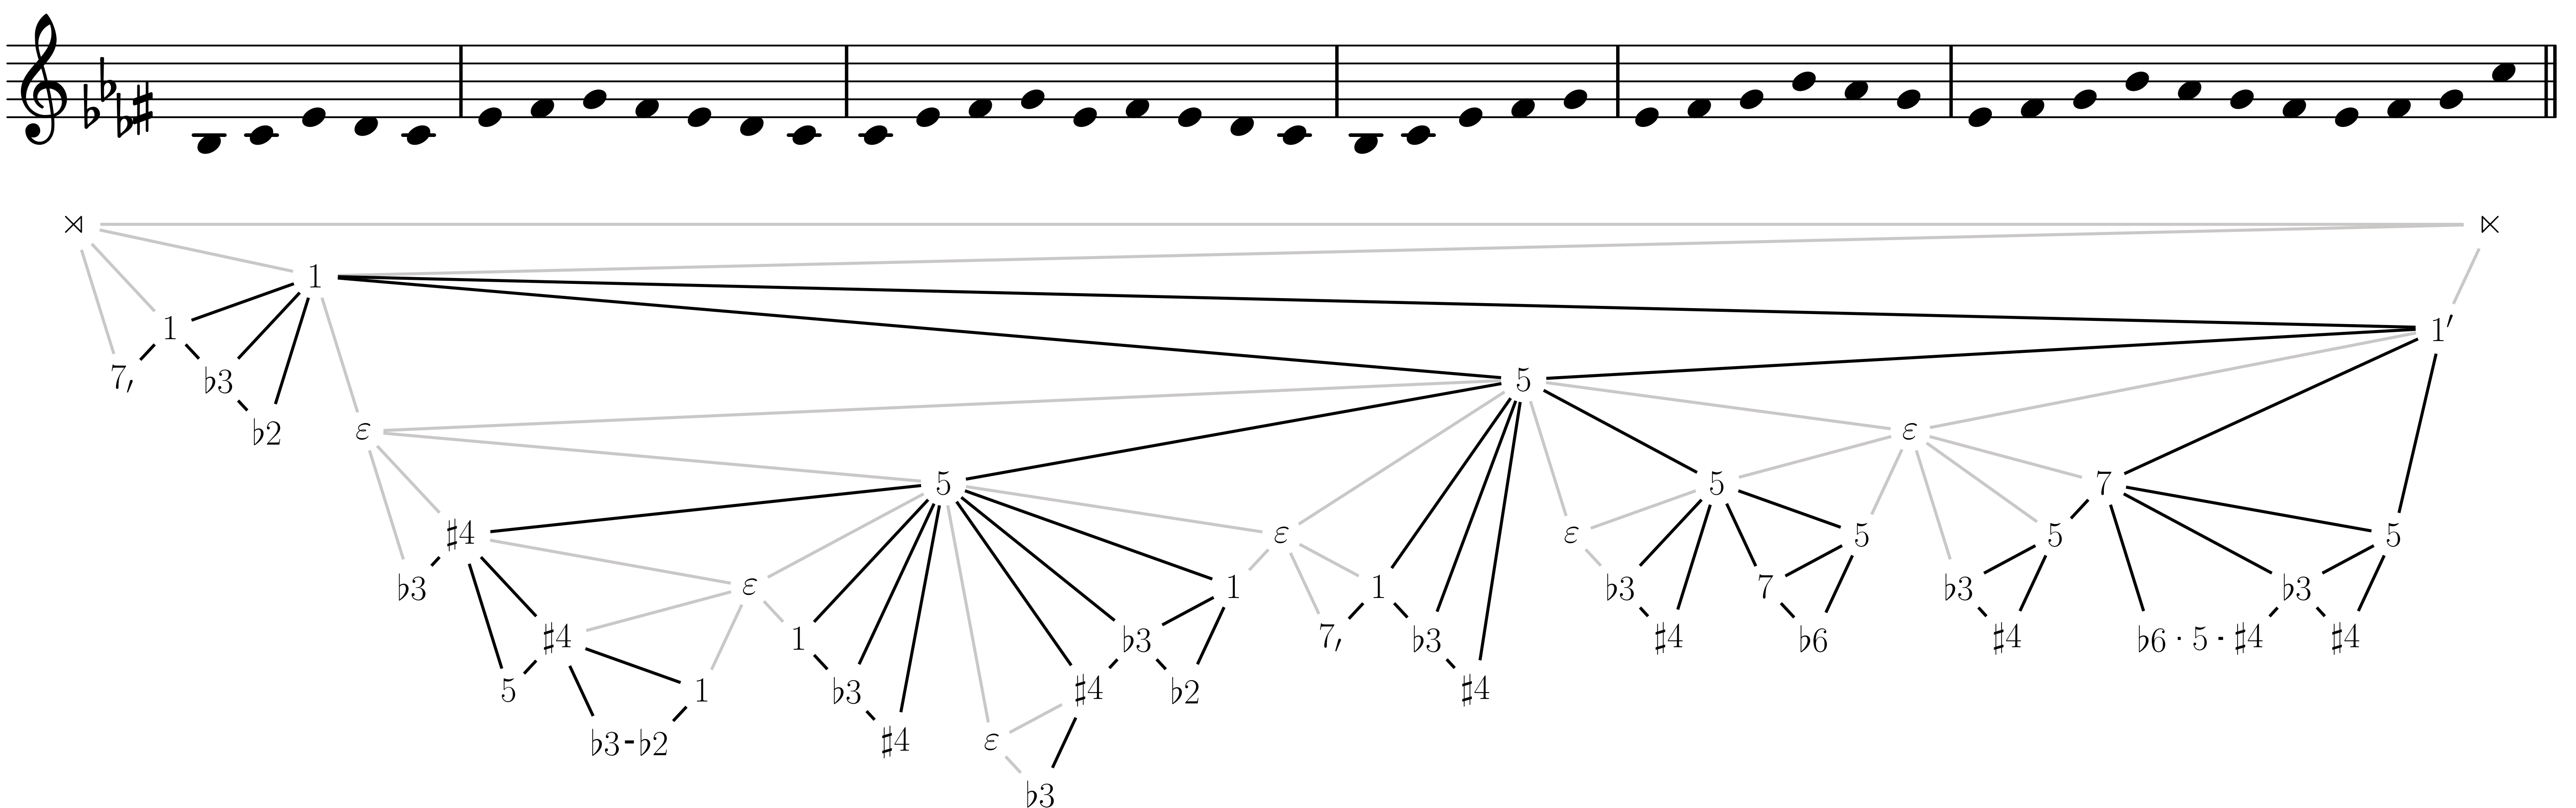

Selected phrases, in order of performance, from the ascending part of an aṭṭalāp in raṭga Multaṇiṭ, recorded by the sitarist Dharambir Singh.

### Formal Representation

Since both notes and intervals are elaborated, melodies are represented as graphs with **notes as nodes** and **intervals as edges**. The elaboration operations then form an edge-replacement **graph grammar**.

Interval elaborations replace an edge with a new subgraph:

$$(n_1 \rightarrow n_2) \rightarrow (n_1 \rightarrow n' \rightarrow n_2)$$

Note elaboration also replace edges but consider only one of the nodes:

$$(n_1 \rightarrow *) \rightarrow (n_1 \rightarrow n' \rightarrow *)$$


Independent parts of the graph can be separated explicitly by introducing an **empty node**:

$$(n_1 \rightarrow n_2) \rightarrow (n_1 \rightarrow \varepsilon \rightarrow n_2)$$

Another advantage of graphs is that they can capture more complex structures such as **polyphonic networks**.

### Graphical Notation

Since the graph of a monophonic melody is linear, its derivation can be visualized by an **outerplanar graph** [YustGeometryMelodicHarmonic2009], where each polygon represents an edge replacement.

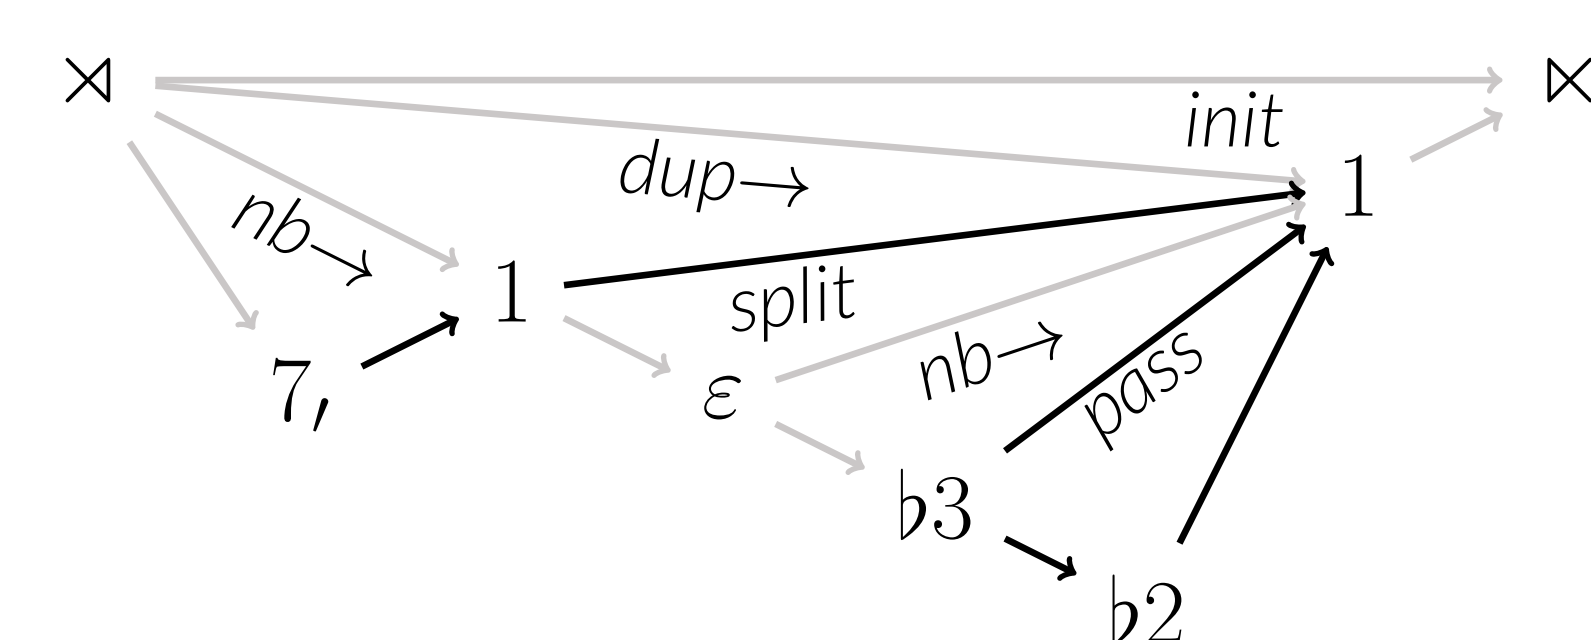

Independence is indicated by  $\varepsilon$ -nodes. Adjacent edges are shown in light gray, revealing the differences between note and interval elaborations.

### References

### Funding and Paper Link



The research presented on this poster is generously supported by the Volkswagen Foundation and Claude Latour. This project has received funding from the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme under grant agreement No 760081 – PMSB. We thank Dharambir Singh for the permission to use his recording of an aṭṭalāp in raṭga Multaṇiṭ.

