# ATP PLAYERS

Helping Players Reach Their Full Potential

QUERY'S OUTPUT

# 1) For each country:

**a)** Number of players

**b)** Number of tournaments

**c)** Number of rounds umber of players, number of tournaments and number of rounds

```sql
SELECT
    c.name AS CountryName,
    COALESCE(p_count.num_players, 0) AS TotalPlayers,
    COALESCE(t_count.num_tournaments, 0) AS TotalTournaments,
    COALESCE(r_count.num_rounds, 0) AS TotalGames
FROM countries c
LEFT JOIN (
    -- Subquery: Número de jogadores por país
    SELECT country_id, COUNT(*) AS num_players
    FROM players
    GROUP BY country_id
) p_count ON c.id = p_count.country_id
LEFT JOIN (
    -- Subquery: Número de torneios por país
    SELECT country_id, COUNT(*) AS num_tournaments
    FROM tournaments
    GROUP BY country_id
) t_count ON c.id = t_count.country_id
LEFT JOIN (
    -- Subquery: Número de rounds (jogos de jogadores desse país)
    SELECT p.country_id, COUNT(*) AS num_rounds
    FROM player_per_game ppg
    INNER JOIN players p ON ppg.player_id = p.id
    GROUP BY p.country_id
) r_count ON c.id = r_count.country_id
ORDER BY c.name;
```

NEXT QUERY

# 1) For each country:

**a)** Number of players

**b)** Number of tournaments

**c)** Number of rounds umber of players, number of tournaments and number of rounds

| country_name | TotalPlayers | TotalTournaments | TotalGames |
|---|---|---|---|
| Afghanistan | 0 | 0 | 0 |
| Åland Islands | 0 | 0 | 0 |
| Albania | 0 | 0 | 0 |
| Algeria | 15 | 35 | 1598 |
| American Samoa | 0 | 0 | 0 |
| Andorra | 0 | 13 | 0 |
| Angola | 0 | 0 | 0 |
| Anguilla | 0 | 0 | 0 |
| Antarctica | 0 | 0 | 0 |
| Antigua and Barbuda | 0 | 0 | 0 |
| Argentina | 418 | 420 | 70695 |
| Armenia | 6 | 7 | 697 |
| Aruba | 3 | 4 | 36 |
| Australia | 366 | 550 | 48793 |
| Austria | 181 | 353 | 26389 |
| Azerbaijan | 1 | 9 | 259 |
| Bahamas | 10 | 20 | 997 |
| Bahrain | 0 | 12 | 0 |
| Bangladesh | 0 | 2 | 0 |
| Barbados | 3 | 16 | 777 |
| Belarus | 49 | 67 | 6677 |
| Belgium | 112 | 224 | 20515 |
| Belize | 0 | 0 | 0 |
| Benin | 7 | 0 | 249 |
| Bermuda | 1 | 17 | 3 |

NEXT QUERY

# 2) List of top 10 players name with their % of winning games, order by %

```
SELECT
    p.playername,
    SUM(CASE WHEN ppg.wl_bool = 1 THEN 1 ELSE 0 END) AS wins,
    COUNT(*) AS total_games,
    ROUND(
        (SUM(CASE WHEN ppg.wl_bool = 1 THEN 1 ELSE 0 END) * 100.0) / COUNT(*),
        2
    ) AS win_percentage
FROM players p
INNER JOIN player_per_game ppg ON p.id = ppg.player_id
GROUP BY p.id, p.playername
HAVING COUNT(*) >= 10  -- Filtro mínimo de jogos para relevância estatística
ORDER BY win_percentage DESC, total_games DESC
LIMIT 10;
```

| playername | wins | total_games 2 | win_percentage 1 |
|---|---|---|---|
| Rafael Nadal | 1130 | 1360 | 83.09 |
| Novak Djokovic | 1058 | 1276 | 82.92 |
| Bjorn Borg | 654 | 795 | 82.26 |
| Roger Federer | 1280 | 1567 | 81.68 |
| Ivan Lendl | 1077 | 1320 | 81.59 |
| John McEnroe | 889 | 1090 | 81.56 |
| Jimmy Connors | 1266 | 1564 | 80.95 |
| Pete Sampras | 767 | 999 | 76.78 |
| Andre Agassi | 887 | 1166 | 76.07 |
| Boris Becker | 714 | 940 | 75.96 |

NEXT QUERY

# 3) List of top 10 left-handed players name with their % of winning games in Grand Slam games

```sql
SELECT
    p.playername,
    p.fronthand,
    SUM(CASE WHEN ppg.wl_bool = 1 THEN 1 ELSE 0 END) AS wins,
    COUNT(*) AS total_grand_slam_games,
    ROUND(
        (SUM(CASE WHEN ppg.wl_bool = 1 THEN 1 ELSE 0 END) * 100.0) / COUNT(*),
        2
    ) AS win_percentage
FROM players p
INNER JOIN player_per_game ppg ON p.id = ppg.player_id
INNER JOIN tournaments t ON ppg.tournament_id = t.id
WHERE p.fronthand = 'Left-Handed'  -- Ajustar valor conforme dados reais (ex: 'L', 'left', etc.)
  AND t.grand_slam = 1       -- Ajustar conforme dados reais (pode ser boolean ou int)
GROUP BY p.id, p.playername, p.fronthand
HAVING COUNT(*) >= 15  -- Mínimo de jogos em Grand Slams
ORDER BY win_percentage DESC, total_grand_slam_games DESC
LIMIT 10;
```

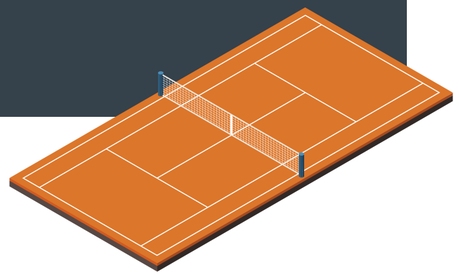

| playername | fronthand | wins | total_grand_slam_games 2 | win_percentage 1 |
|---|---|---|---|---|
| Rafael Nadal | Left-Handed | 299 | 341 | 87.68 |
| Jimmy Connors | Left-Handed | 233 | 283 | 82.33 |
| John McEnroe | Left-Handed | 168 | 206 | 81.55 |
| Guillermo Vilas | Left-Handed | 139 | 184 | 75.54 |
| Goran Ivanisevic | Left-Handed | 110 | 160 | 68.75 |
| Thomas Muster | Left-Handed | 78 | 116 | 67.24 |
| Andres Gomez | Left-Handed | 62 | 93 | 66.67 |
| Marcelo Rios | Left-Handed | 51 | 77 | 66.23 |
| Denis Shapovalov | Left-Handed | 33 | 51 | 64.71 |
| Henri Leconte | Left-Handed | 78 | 122 | 63.93 |

# 4) List of top 5 players name with their winning games in Hard Ground

```sql
SELECT
    p.playername,
    SUM(CASE WHEN ppg.wl_bool = 1 THEN 1 ELSE 0 END) AS wins_on_hard,
    COUNT(*) AS total_hard_games
FROM players p
INNER JOIN player_per_game ppg ON p.id = ppg.player_id
INNER JOIN tournaments t ON ppg.tournament_id = t.id
WHERE t.ground = 'Hard'  -- Ajustar valor conforme dados reais
  AND ppg.wl_bool = 1    -- Só vitórias
GROUP BY p.id, p.playername
ORDER BY wins_on_hard DESC
LIMIT 5;
```

| playername | wins_on_hard 1 | total_hard_games |
|---|---|---|
| Roger Federer | 826 | 826 |
| Novak Djokovic | 638 | 638 |
| Andre Agassi | 598 | 598 |
| Ti Chen | 580 | 580 |
| Jimmy Connors | 565 | 565 |

# Obrigado!

GRUPO 04
Fábio Alexandre Alves Gonçalves | 130 662
Martim Duarte Sousa | 130 629
Miguel Matos Galvão | 106 560
Simão Rafael dos Anjos Reis | 130 618

Licenciatura em Ciência de Dados
Unidade Curricular de Armazenamento Para Big Data
2º ano, 1º semestre
Ano Letivo 2025/2026

Docente: António Luís Lopes