

Banco de dados como serviço em tempo real: Firebase

Fábio da Silva Takaki¹, Lucas Martins Valladares Ribeiro¹

¹Faculdade de Ciências e Tecnologia

Universidade Estadual Paulista

“Júlio de Mesquita Filho”

Caixa Postal 19060-900 – Presidente Prudente – SP – Brasil

fabio@takaki.me, lucasmbtos@live.com

Abstract. *With the emergence of the digital society, several concepts for data storage and manipulation have emerged with the purpose of reducing resource and maintenance costs, of which Cloud Computing stands out. This article proposes a case study of a tool that addresses one of the service models of the Cloud Computing (IaaS, PaaS and SaaS) architecture, which is Firebase, a tool created by Google. Firebase is a mobile platform that provides a number of services for the rapid development of high-quality mobile applications, from which stand out the real-time database service that will be the focus of this work.*

Resumo. *Com o surgimento da sociedade digital, diversos conceitos para armazenamento e manipulação dos dados surgiram com a finalidade de diminuir os custos de recursos e manutenção, do qual destaca-se o Cloud Computing. Este artigo propõe um estudo de caso de uma ferramenta que aborda um dos modelos de serviço da arquitetura Cloud Computing (IaaS, PaaS e SaaS) que é o Firebase, uma ferramenta criada pela Google. O Firebase é uma plataforma mobile que fornece diversos serviços para o rápido desenvolvimento de aplicativos móveis de alta qualidade, do qual destaca-se o serviço de banco de dados em tempo real que será o foco principal deste trabalho.*

Introdução

Com a popularização da internet em que surgiu uma sociedade digital, o volume de informações se propagou de forma abundante nos últimos anos. Em decorrência disso, diversos conceitos para armazenamento e manipulação dos dados surgiram com a finalidade de diminuir os custos de recursos e manutenção, no qual destaca-se o Cloud Computing. Cloud computing é uma tecnologia em que os recursos de hardware e software, tais como aplicações especiais, CPU, armazenamento e muitos outros são fornecidos aos usuários através da Internet como um serviço, e é cobrado com base no que você usa [Bokhari et al. 2016]. Esses recursos têm a capacidade de escalabilidade automática de acordo com a demanda do cliente.

Este artigo foca em um dos serviços que está em grande crescimento na sociedade moderna que é da área mobile em que mais de 3,2 bilhões de pessoas têm acesso a internet. Firebase é um serviço de dados em nuvem em tempo real, utilizado para criação de aplicativos multiplataformas em que compartilham um banco de dados não relacional que a própria ferramenta disponibiliza.

Este artigo está organizado da seguinte maneira: na Seção II será apresentado conceitos de Cloud Computing; na Seção III será apresentado a metodologia de desenvolvimento

aqui aplicada; na Seção IV um estudo de caso da ferramenta firebase mostrando suas vantagens e desvantagens; por fim na Seção V resultados e trabalhos futuros.

Cloud Computing

O conceito de Cloud Computing é classificado em três modelos de serviço: Software as a Service (SaaS), Plataforma as a Service (PaaS) e Infrastructure as a Service (IaaS). Com isso, é possível criar uma pirâmide para representar os modelos de serviço por meio de camadas de virtualização (Figura 1). Abaixo será descrita brevemente as características de cada modelo de serviço para auxiliar o entendimento do que a ferramenta firebase oferece.

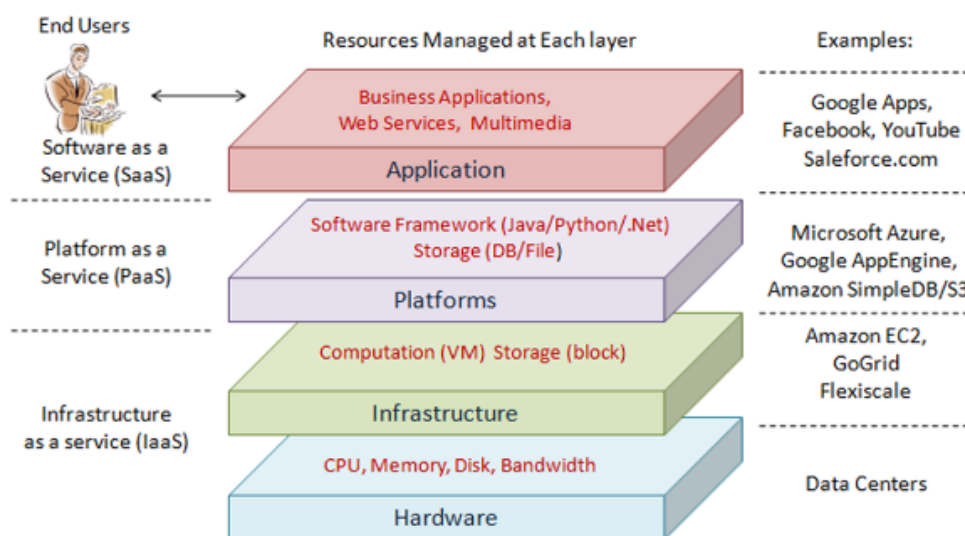


Figure 1. Arquitetura Cloud Computing (retirado de: [Zhang et al. 2010])

Infrastructure as a Service

Product as a Service

Software as a Service

Esse modelo de serviço como o próprio nome diz, é um software como serviço fornecido através da internet, não necessitando de sua instalação. O fornecedor desse modelo de serviço, é responsável por controlar e limitar o uso das aplicações. Portanto, o cliente deste modelo de serviço também fica livre da necessidade de uma infraestrutura do qual o fornecedor já disponibiliza.

Metodologia de Desenvolvimento

In some conferences, the papers are published on CD-ROM while only the abstract is published in the printed Proceedings. In this case, authors are invited to prepare two final versions of the paper. One, complete, to be published on the CD and the other, containing only the first page, with abstract and “resumo” (for papers in Portuguese).

Estudo de Caso

Section titles must be in boldface, 13pt, flush left. There should be an extra 12 pt of space before each title. Section numbering is optional. The first paragraph of each section should not be indented, while the first lines of subsequent paragraphs should be indented by 1.27 cm.

Conclusões e Trabalhos Futuros

The subsection titles must be in boldface, 12pt, flush left.

Figures and Captions

Figure and table captions should be centered if less than one line (Figure 1), otherwise justified and indented by 0.8cm on both margins, as shown in Figure 2. The caption font must be Helvetica, 10 point, boldface, with 6 points of space before and after each caption.

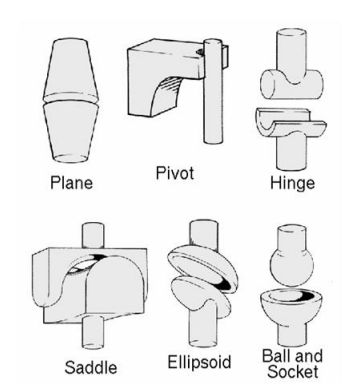


Figure 2. This figure is an example of a figure caption taking more than one line and justified considering margins mentioned in Section 6.

In tables, try to avoid the use of colored or shaded backgrounds, and avoid thick, doubled, or unnecessary framing lines. When reporting empirical data, do not use more decimal digits than warranted by their precision and reproducibility. Table caption must be placed before the table (see Table 1) and the font used must also be Helvetica, 10 point, boldface, with 6 points of space before and after each caption.

Images

All images and illustrations should be in black-and-white, or gray tones, excepting for the papers that will be electronically available (on CD-ROMs, internet, etc.). The image resolution on paper should be about 600 dpi for black-and-white images, and 150-300 dpi for grayscale images. Do not include images with excessive resolution, as they may take hours to print, without any visible difference in the result.

References

Bibliographic references must be unambiguous and uniform. We recommend giving the author names references in brackets, e.g. Blablabla said Nobody.

The references must be listed using 12 point font size, with 6 points of space before each reference. The first line of each reference should not be indented, while the subsequent should be indented by 0.5 cm.

Table 1. Variables to be considered on the evaluation of interaction techniques

	Chessboard top view	Chessboard perspective view
Selection with side movements	6.02 ± 5.22	7.01±6.84
Selection with in- depth movements	6.29±4.99	12.22±11.33
Manipulation with side movements	4.66± 4.94	3.47±2.20
Manipulation with in- depth movements	5.71 ±4.55	5.37 ±3.28

References

- Bokhari, M. U., Shallal, Q. M., and Tamandani, Y. K. (2016). Cloud computing service models: A comparative study. In *2016 3rd International Conference on Computing for Sustainable Global Development (INDIACom)*, pages 890–895.
- Zhang, Q., Cheng, L., and Boutaba, R. (2010). Cloud computing: state-of-the-art and research challenges. *Journal of Internet Services and Applications*, 1(1):7–18.