

Bootstrap Components Over a dozen reusable components built to provide iconography, dropdowns, navigation, alerts, popovers, and much more.

Looking for Bootstrap 2.3.2 docs? We've moved it to a new home while we push forward with Bootstrap 3. Read the blog for details.

Glyphicons
Dropdowns
Button groups
Button dropdowns
Input groups
Navs
Navbar
Breadcrumbs
Pagination
Labels
Badges
Jumbotron
Page header
Thumbnails
Alerts
Progress bars
Media object
List group
Panels
Wells

Glyphicons

Available glyphs

Includes 200 glyphs in font format from the Glyphicon Halflings set. Glyphicons Halflings are normally not available for free, but their creator has made them available for Bootstrap free of cost. As a thank you, we only ask that you to include a link back to Glyphicons whenever possible.

.glyphicon .glyphicon-adjust	.glyphicon .glyphicon-align- center	.glyphicon .glyphicon-align- justify	.glyphicon .glyphicon-align- left
.glyphicon	.glyphicon	.glyphicon	.glyphicon
.glyphicon-align-	.glyphicon-arrow-	.glyphicon-arrow-	.glyphicon-arrow-
right	down	left	right
.glyphicon	.glyphicon	.glyphicon	.glyphicon
.glyphicon-arrow-	.glyphicon-	.glyphicon-	.glyphicon-ban-
up	asterisk	backward	circle
.glyphicon .glyphicon- barcode	.glyphicon .glyphicon-bell	B .glyphicon .glyphicon-bold	.glyphicon .glyphicon-book

.glyphicon .glyphicon- bookmark	.glyphicon .glyphicon- briefcase	.glyphicon .glyphicon- bullhorn	.glyphicon .glyphicon- calendar
.glyphicon .glyphicon-camera	.glyphicon .glyphicon- certificate	.glyphicon .glyphicon-check	.glyphicon .glyphicon- chevron-down
.glyphicon .glyphicon- chevron-left	.glyphicon .glyphicon- chevron-right	.glyphicon .glyphicon- chevron-up	.glyphicon .glyphicon-circle- arrow-down
.glyphicon .glyphicon-circle- arrow-left	.glyphicon .glyphicon-circle- arrow-right	.glyphicon .glyphicon-circle- arrow-up	.glyphicon .glyphicon-cloud
.glyphicon .glyphicon-cloud- download	.glyphicon .glyphicon-cloud- upload	.glyphicon .glyphicon-cog	.glyphicon .glyphicon- collapse-down
.glyphicon .glyphicon- collapse-up	.glyphicon .glyphicon- comment	.glyphicon .glyphicon- compressed	.glyphicon .glyphicon- copyright-mark
.glyphicon .glyphicon-credit- card	.glyphicon .glyphicon-cutlery	.glyphicon .glyphicon- dashboard	.glyphicon .glyphicon- download

.glyphicon .glyphicon- download-alt	.glyphicon .glyphicon- earphone	.glyphicon .glyphicon-edit	.glyphicon .glyphicon-eject
.glyphicon .glyphicon- envelope	.glyphicon .glyphicon-euro	.glyphicon .glyphicon- exclamation-sign	.glyphicon .glyphicon-expand
.glyphicon .glyphicon-export	.glyphicon .glyphicon-eye- close	.glyphicon .glyphicon-eye- open	.glyphicon .glyphicon- facetime-video
.glyphicon .glyphicon-fast- backward	.glyphicon .glyphicon-fast- forward	.glyphicon .glyphicon-file	.glyphicon .glyphicon-film
.glyphicon .glyphicon-filter	.glyphicon .glyphicon-fire	.glyphicon .glyphicon-flag	.glyphicon .glyphicon-flash
.glyphicon .glyphicon-floppy- disk	.glyphicon .glyphicon-floppy- open	.glyphicon .glyphicon-floppy- remove	.glyphicon .glyphicon-floppy- save
.glyphicon .glyphicon-floppy- saved	.glyphicon .glyphicon-folder- close	.glyphicon .glyphicon-folder- open	A .glyphicon .glyphicon-font

.glyphicon .glyphicon-forward	.glyphicon .glyphicon- fullscreen	£ .glyphicon .glyphicon-gbp	.glyphicon .glyphicon-gift
.glyphicon .glyphicon-glass	.glyphicon .glyphicon-globe	.glyphicon .glyphicon-hand- down	.glyphicon .glyphicon-hand- left
.glyphicon .glyphicon-hand- right	.glyphicon .glyphicon-hand- up	.glyphicon .glyphicon-hd- video	.glyphicon .glyphicon-hdd
H .glyphicon .glyphicon-header	.glyphicon .glyphicon- headphones	.glyphicon .glyphicon-heart	.glyphicon .glyphicon-heart- empty
.glyphicon .glyphicon-home	.glyphicon .glyphicon-import	.glyphicon .glyphicon-inbox	.glyphicon .glyphicon-indent- left
.glyphicon .glyphicon-indent- right	.glyphicon .glyphicon-info- sign	I .glyphicon .glyphicon-italic	.glyphicon .glyphicon-leaf
.glyphicon .glyphicon-link	.glyphicon .glyphicon-list	.glyphicon .glyphicon-list-alt	.glyphicon .glyphicon-lock

.glyphicon .glyphicon-log-in	.glyphicon .glyphicon-log-out	.glyphicon .glyphicon-magnet	.glyphicon .glyphicon-map- marker
.glyphicon .glyphicon-minus	.glyphicon .glyphicon-minus- sign	.glyphicon .glyphicon-move	.glyphicon .glyphicon-music
.glyphicon .glyphicon-new- window	.glyphicon .glyphicon-off	.glyphicon .glyphicon-ok	.glyphicon .glyphicon-ok- circle
.glyphicon .glyphicon-ok-sign	.glyphicon .glyphicon-open	.glyphicon .glyphicon- paperclip	.glyphicon .glyphicon-pause
.glyphicon .glyphicon-pencil	.glyphicon .glyphicon-phone	.glyphicon .glyphicon-phone- alt	.glyphicon .glyphicon-picture
.glyphicon .glyphicon-plane	.glyphicon .glyphicon-play	.glyphicon .glyphicon-play- circle	.glyphicon .glyphicon-plus
.glyphicon .glyphicon-plus- sign	.glyphicon .glyphicon-print	.glyphicon .glyphicon- pushpin	.glyphicon .glyphicon-qrcode

.glyphicon .glyphicon- question-sign	.glyphicon .glyphicon- random	.glyphicon .glyphicon-record	.glyphicon .glyphicon-refresh
.glyphicon .glyphicon- registration-mark	.glyphicon .glyphicon-remove	.glyphicon .glyphicon- remove-circle	.glyphicon .glyphicon- remove-sign
.glyphicon .glyphicon-repeat	.glyphicon .glyphicon-resize- full	.glyphicon .glyphicon-resize- horizontal	.glyphicon .glyphicon-resize- small
.glyphicon .glyphicon-resize- vertical	.glyphicon .glyphicon-retweet	.glyphicon .glyphicon-road	.glyphicon .glyphicon-save
.glyphicon .glyphicon-saved	.glyphicon .glyphicon- screenshot	.glyphicon .glyphicon-sd- video	.glyphicon .glyphicon-search
.glyphicon .glyphicon-send	.glyphicon .glyphicon-share	.glyphicon .glyphicon-share- alt	.glyphicon .glyphicon- shopping-cart
.glyphicon .glyphicon-signal	.glyphicon .glyphicon-sort	.glyphicon .glyphicon-sort- by-alphabet	.glyphicon .glyphicon-sort- by-alphabet-alt

.glyphicon .glyphicon-sort- by-attributes	.glyphicon .glyphicon-sort- by-attributes-alt	.glyphicon .glyphicon-sort- by-order	.glyphicon .glyphicon-sort- by-order-alt
.glyphicon .glyphicon- sound-5-1	.glyphicon .glyphicon- sound-6-1	.glyphicon .glyphicon- sound-7-1	.glyphicon .glyphicon-sound- dolby
.glyphicon .glyphicon-sound- stereo	.glyphicon .glyphicon-star	.glyphicon .glyphicon-star- empty	.glyphicon .glyphicon-stats
.glyphicon .glyphicon-step- backward	.glyphicon .glyphicon-step- forward	.glyphicon .glyphicon-stop	.glyphicon .glyphicon- subtitles
.glyphicon .glyphicon-tag	.glyphicon .glyphicon-tags	.glyphicon .glyphicon-tasks	.glyphicon .glyphicon-text- height
.glyphicon .glyphicon-text- width	.glyphicon .glyphicon-th	.glyphicon .glyphicon-th- large	.glyphicon .glyphicon-th-list
.glyphicon .glyphicon- thumbs-down	.glyphicon .glyphicon- thumbs-up	.glyphicon .glyphicon-time	.glyphicon .glyphicon-tint


.glyphicon .glyphicon-tower	.glyphicon .glyphicon-transfer	.glyphicon .glyphicon-trash	.glyphicon .glyphicon-tree- conifer
.glyphicon .glyphicon-tree- deciduous	.glyphicon .glyphicon- unchecked	.glyphicon .glyphicon-upload	.glyphicon .glyphicon-usd
.glyphicon .glyphicon-user	.glyphicon .glyphicon- volume-down	.glyphicon .glyphicon- volume-off	.glyphicon .glyphicon- volume-up
.glyphicon .glyphicon- warning-sign	.glyphicon .glyphicon-wrench	.glyphicon .glyphicon-zoom- in	.glyphicon .glyphicon-zoom- out


How to use

For performance reasons, all icons require a base class and individual icon class. To use, place the following code just about anywhere. Be sure to leave a space between the icon and text for proper padding.

Examples

Use them in buttons, button groups for a toolbar, navigation, or prepended form inputs.

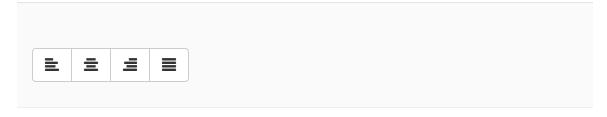




Dropdowns

Toggleable, contextual menu for displaying lists of links. Made interactive with the dropdown JavaScript plugin.

Example

Wrap the dropdown's trigger and the dropdown menu within .dropdown, or another element that declares position: relative; . Then add the menu's HTML.

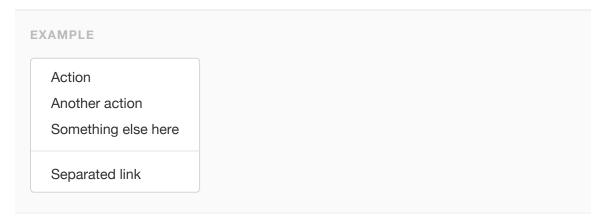


Alignment options

Add .pull-right to a .dropdown-menu to right align the dropdown menu.


Headers

Add a header to label sections of actions in any dropdown menu.

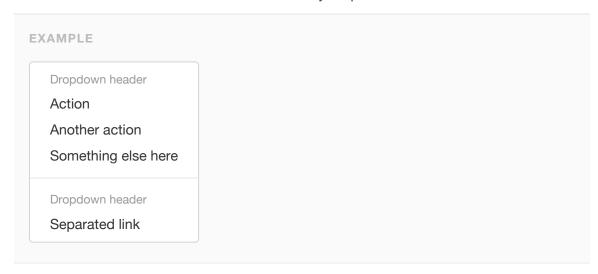

Disabled menu items

Add .disabled to a in the dropdown to disable the link.

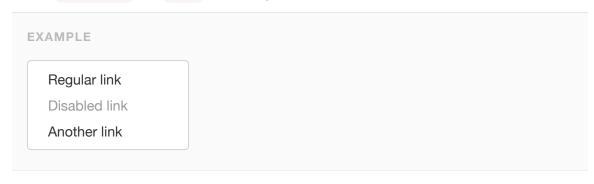

Button groups


Group a series of buttons together on a single line with the button group. Add on optional JavaScript radio and checkbox style behavior with our buttons plugin.

Tooltips & popovers in button groups require special setting

When using tooltips or popovers on elements within a .btn-group, you'll have to specify the option container: 'body' to avoid unwanted side effects (such as the element growing wider and/or losing its rounded corners when the tooltip or popover is triggered).

Basic example

Wrap a series of buttons with .btn in .btn-group .

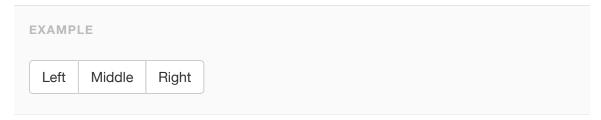


Button toolbar

Combine sets of <div class="btn-group"> into a <div class="btn-toolbar"> for more complex components.




Sizing

Instead of applying button sizing classes to every button in a group, just add .btn-group-* to the .btn-group.

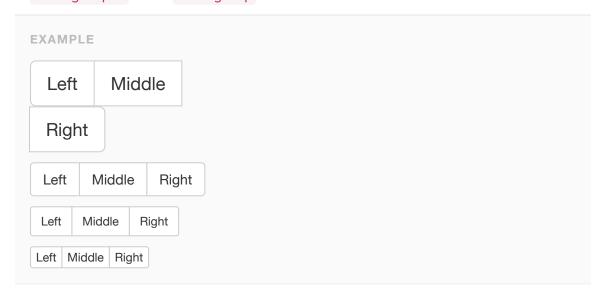

Nesting

Place a .btn-group within another .btn-group when you want dropdown menus mixed with a series of buttons.

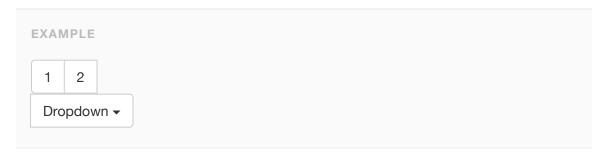

Vertical variation

Make a set of buttons appear vertically stacked rather than horizontally.



Justified link variation

Make a group of buttons stretch at the same size to span the entire width of its parent.

Element-specific usage

This only works with <a> elements as the <button> doesn't pick up these styles.

Button dropdowns

Use any button to trigger a dropdown menu by placing it within a .btn-group and providing the proper menu markup.

Plugin dependency

Button dropdowns require the dropdown plugin to be included in your version of Bootstrap.

Single button dropdowns

Turn a button into a dropdown toggle with some basic markup changes.




Split button dropdowns

Similarly, create split button dropdowns with the same markup changes, only with a separate button.




Sizing

Button dropdowns work with buttons of all sizes.

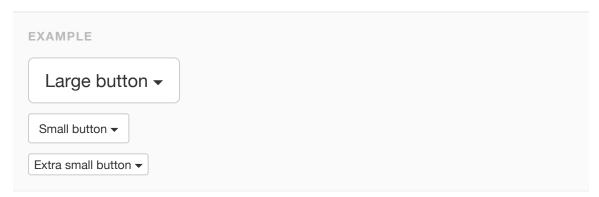

Dropup variation

Trigger dropdown menus above elements by adding .dropup to the parent.

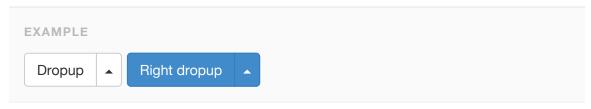

Input groups

Extend form controls by adding text or buttons before, after, or on both sides of any text-based input. Use .input-group with an .input-group-addon to prepend or append elements to a .form-control .

Cross-browser compatibility

Avoid using <select> elements here as they cannot be fully styled in WebKit browsers.

Tooltips & popovers in input groups require special setting

When using tooltips or popovers on elements within an .input-group, you'll have to specify the option container: 'body' to avoid unwanted side effects (such as the element growing wider and/or losing its rounded corners when the tooltip or popover is triggered).

Don't mix with form groups

Do not apply input group classes directly to form groups. An input group is an isolated component.

Basic example



Sizing

Add the relative form sizing classes to the .input-group itself and contents within will automatically resize—no need for repeating the form control size classes on each element.



Checkboxes and radio addons

Place any checkbox or radio option within an input group's addon instead of text.



Button addons

Buttons in input groups are a bit different and require one extra level of nesting. Instead of .input-group-addon, you'll need to use .input-group-btn to wrap the buttons. This is required due to default browser styles that cannot be overridden.



Buttons with dropdowns



Segmented buttons



Navs

Navs available in Bootstrap have shared markup, starting with the base .nav class, as well as shared states. Swap modifier classes to switch between each style.

Tabs

Note the .nav-tabs class requires the .nav base class.

EXAMPLE


Home Profile Messages

Requires JavaScript tabs plugin

For tabs with tabbable areas, you must use the tabs JavaScript plugin.

Pills

Take that same HTML, but use .nav-pills instead:

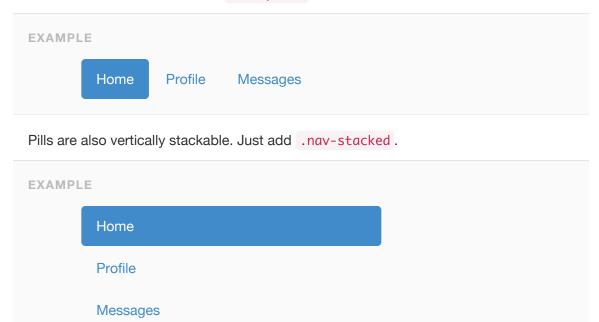


Justified

Easily make tabs or pills equal widths of their parent at screens wider than 768px with .nav-justified. On smaller screens, the nav links are stacked.

WebKit and responsive justified navs

Chrome and Safari both exhibit a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing. This bug is also shown in the justified nav example.

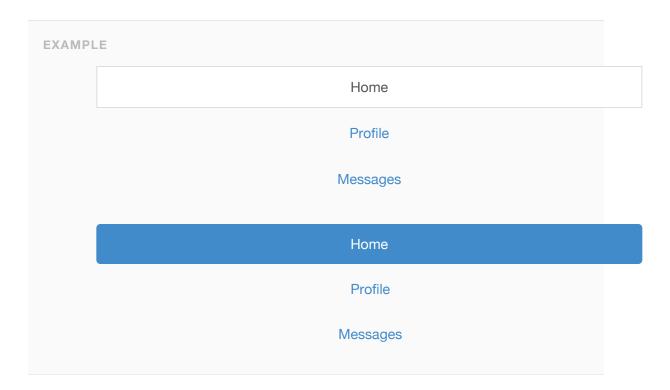

Disabled links

For any nav component (tabs, pills, or list), add .disabled for gray links and no hover effects.

Link functionality not impacted


This class will only change the <a> 's appearance, not its functionality. Use custom JavaScript to disable links here.

Clickable link Clickable link Disabled link

Using dropdowns

Add dropdown menus with a little extra HTML and the dropdowns JavaScript plugin.

Tabs with dropdowns

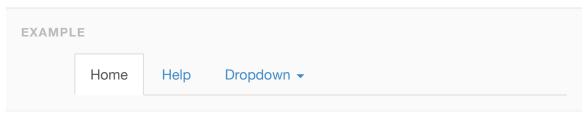

Pills with dropdowns



Navbar

Default navbar


Navbars are responsive meta components that serve as navigation headers for your application or site. They begin collapsed (and are toggleable) in mobile views and become horizontal as the available viewport width increases.

Customize the collapsing point

Depending on the content in your navbar, you might need to change the point at which your navbar switches between collapsed and horizontal mode. Customize the <code>@grid-float-breakpoint</code> variable or add your own media query.

Requires JavaScript

If JavaScript is disabled and the viewport is narrow enough that the navbar collapses, it will be impossible to expand the navbar and view the content within the .navbar-collapse.

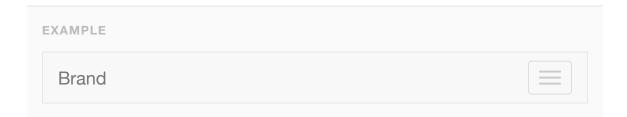

Plugin dependency

The responsive navbar requires the collapse plugin to be included in your version of Bootstrap.

Make navbars accessible

Be sure to add a role="navigation" to every navbar to help with accessibility.

Forms

Place form content within .navbar-form for proper vertical alignment and collapsed behavior in narrow viewports. Use the alignment options to decide where it resides within the navbar content.

As a heads up, .navbar-form shares much of its code with .form-inline via mixin.



Always add labels

Screen readers will have trouble with your forms if you don't include a label for every input. For these inline navbar forms, you can hide the labels using the .sr-only class.

Buttons

Add the .navbar-btn class to <button> elements not residing in a <form> to vertically center them in the navbar.



Context-specific usage

Like the standard button classes, .navbar-btn can be used on <a> and <input> elements. However, neither .navbar-btn nor the standard button classes should be used on <a> elements within .navbar-nav .

Text

Wrap strings of text in an element with .navbar-text , usually on a tag for proper leading and color.



Non-nav links

For folks using standard links that are not within the regular navbar navigation component, use the .navbar-link class to add the proper colors for the default and inverse navbar options.



Component alignment

Align nav links, forms, buttons, or text, using the .navbar-left or .navbar-right utility classes. Both classes will add a CSS float in the specified direction. For example, to align nav links, put them in a separate
 with the respective utility class applied.

These classes are mixin-ed versions of .pull-left and .pull-right, but they're scoped to media queries for easier handling of navbar components across device sizes.

Fixed to top

Add .navbar-fixed-top.

Brand



EXAMPLE

Body padding required

The fixed navbar will overlay your other content, unless you add padding to the top of the <body> . Try out your own values or use our snippet below. Tip: By default, the navbar is 50px high.

Make sure to include this after the core Bootstrap CSS.

Fixed to bottom

Add .navbar-fixed-bottom instead.

EXAMPLE

Brand



Body padding required

The fixed navbar will overlay your other content, unless you add padding to the bottom of the body> . Try out your own values or use our snippet below. Tip: By default, the navbar is 50px high.

Make sure to include this after the core Bootstrap CSS.


Static top

Create a full-width navbar that scrolls away with the page by adding .navbar-static-top. Unlike the .navbar-fixed* classes, you do not need to change any padding on the body.



Inverted navbar

Modify the look of the navbar by adding .navbar-inverse.

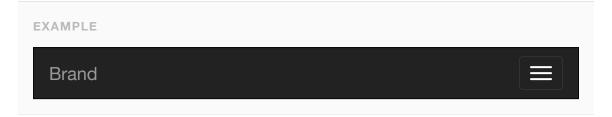

Breadcrumbs

Indicate the current page's location within a navigational hierarchy.

Separators are automatically added in CSS through :before and content.




Pagination

Provide pagination links for your site or app with the multi-page pagination component, or the simpler pager alternative.


Default pagination

Simple pagination inspired by Rdio, great for apps and search results. The large block is hard to miss, easily scalable, and provides large click areas.

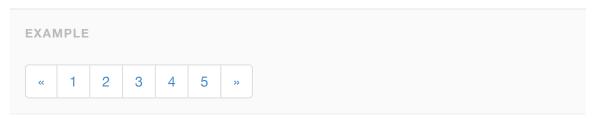

Disabled and active states

Links are customizable for different circumstances. Use .disabled for unclickable links and .active to indicate the current page.

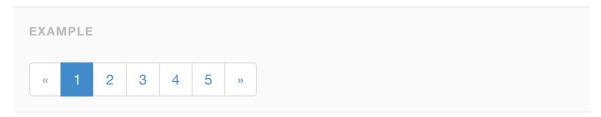

You can optionally swap out active or disabled anchors for to remove click functionality while retaining intended styles.

Sizing

Fancy larger or smaller pagination? Add .pagination-lg or .pagination-sm for additional sizes.




Pager

Quick previous and next links for simple pagination implementations with light markup and styles. It's great for simple sites like blogs or magazines.

Default example

By default, the pager centers links.

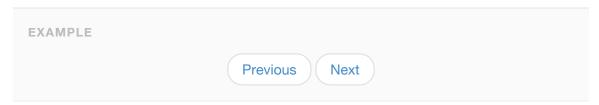


Aligned links

Alternatively, you can align each link to the sides:




Optional disabled state

Pager links also use the general .disabled utility class from the pagination.

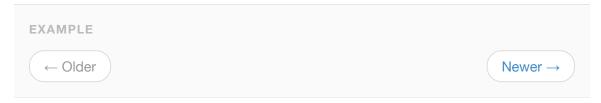


Labels

Example

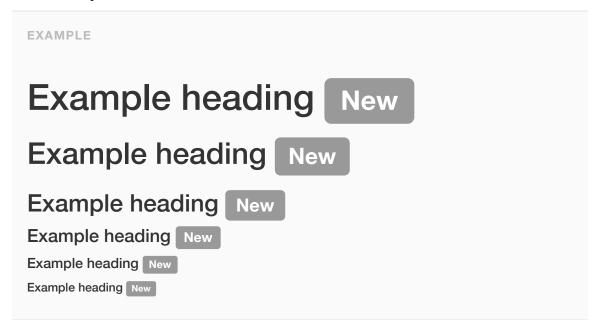


Available variations

Add any of the below mentioned modifier classes to change the appearance of a label.



Badges

Easily highlight new or unread items by adding a to links, Bootstrap navs, and more.



Self collapsing


When there are no new or unread items, badges will simply collapse (via CSS's :empty selector) provided no content exists within.


Cross-browser compatibility

Badges won't self collapse in Internet Explorer 8 because it lacks support for the :empty selector.

Adapts to active nav states

Built-in styles are included for placing badges in active states in pill and list navigations.

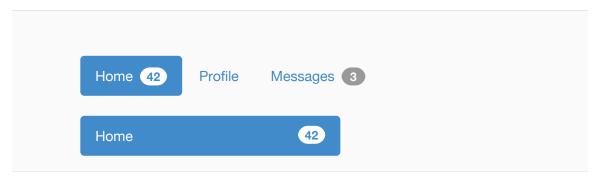

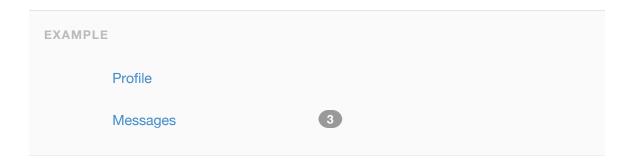

Jumbotron

A lightweight, flexible component that can optionally extend the entire viewport to showcase key content on your site.

Hello, world!

This is a simple hero unit, a simple jumbotron-style component for calling extra attention to featured content or information.

Learn more

To make the jumbotron full width, and without rounded corners, place it outside all .container s and instead add a .container within.

Page header

A simple shell for an <a href="https://https:/

EXAMPLE

Example page header Subtext for


header

Thumbnails

Extend Bootstrap's grid system with the thumbnail component to easily display grids of images, videos, text, and more.

Default example

By default, Bootstrap's thumbnails are designed to showcase linked images with minimal required markup.

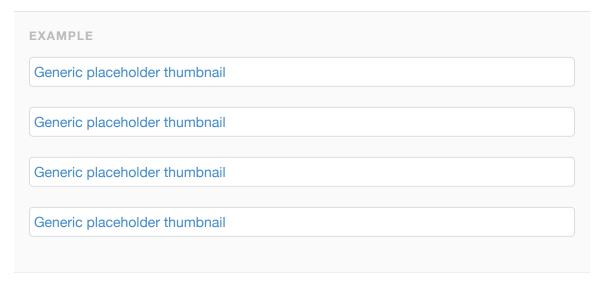

Custom content

With a bit of extra markup, it's possible to add any kind of HTML content like headings, paragraphs, or buttons into thumbnails.

Generic placeholder thumbnail

Thumbnail label

Cras justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.



Button

Generic placeholder thumbnail

Thumbnail label

Cras justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.

Button

Button

Generic placeholder thumbnail

Thumbnail label

Cras justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.



Button

Alerts

Provide contextual feedback messages for typical user actions with the handful of available and flexible alert messages. For inline dismissal, use the alerts jQuery plugin.

Examples

Wrap any text and an optional dismiss button in .alert and one of the four contextual classes (e.g., .alert-success) for basic alert messages.

No default class

Alerts don't have default classes, only base and modifier classes. A default gray alert doesn't make too much sense, so you're required to specify a type via contextual class. Choose from success, info, warning, or danger.

Well done! You successfully read this important alert message.

Heads up! This alert needs your attention, but it's not super important.

Warning! Best check yo self, you're not looking too good.

Oh snap! Change a few things up and try submitting again.

Dismissable alerts

Build on any alert by adding an optional .alert-dismissable and close button.

EXAMPLE

Warning! Best check yo self, you're not looking too good.

×

Ensure proper behavior across all devices

Be sure to use the <button> element with the data-dismiss="alert" data attribute.

Links in alerts

Use the .alert-link utility class to quickly provide matching colored links within any alert.

Well done! You successfully read this important alert message.

Heads up! This alert needs your attention, but it's not super important.

Warning! Best check yo self, you're not looking too good.

Oh snap! Change a few things up and try submitting again.

Progress bars

Provide up-to-date feedback on the progress of a workflow or action with simple yet flexible progress bars.

Cross-browser compatibility

Progress bars use CSS3 transitions and animations to achieve some of their effects. These features are not supported in Internet Explorer 9 and below or older versions of Firefox. Opera 12 does not support animations.


Basic example

Default progress bar.

EXAMPLE


Contextual alternatives

Progress bars use some of the same button and alert classes for consistent styles.

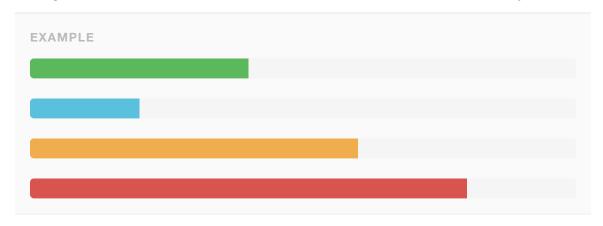

Striped

Uses a gradient to create a striped effect. Not available in IE8.

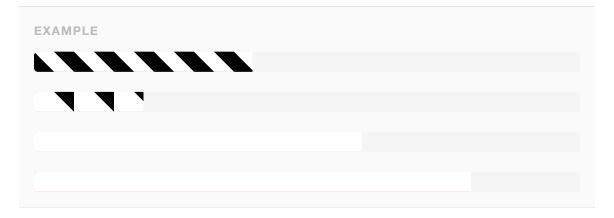

Animated

Add .active to .progress-striped to animate the stripes right to left. Not available in all versions of IE.

EXAMPLE		

Stacked

Place multiple bars into the same .progress to stack them.

EXAMPLE

Media object

Abstract object styles for building various types of components (like blog comments, Tweets, etc) that feature a left- or right-aligned image alongside textual content.

Default media

The default media allow to float a media object (images, video, audio) to the left or right of a content block.

Generic placeholder image Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis. Fusce condimentum nunc ac nisi vulputate fringilla. Donec lacinia congue felis in faucibus.

Generic placeholder image

Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis. Fusce condimentum nunc ac nisi vulputate fringilla. Donec lacinia conque felis in faucibus.

Generic placeholder image Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis. Fusce condimentum nunc ac nisi vulputate fringilla. Donec lacinia conque felis in faucibus.

Media list

With a bit of extra markup, you can use media inside list (useful for comment threads or articles lists).

Generic placeholder image Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

Generic placeholder image Nested media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

Generic placeholder image Nested media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

Generic placeholder image

Nested media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

Media heading

Generic placeholder image

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

List group

List groups are a flexible and powerful component for displaying not only simple lists of elements, but complex ones with custom content.

Basic example

The most basic list group is simply an unordered list with list items, and the proper classes. Build upon it with the options that follow, or your own CSS as needed.

Cras justo odio	
Dapibus ac facilisis in	




Badges

Add the badges component to any list group item and it will automatically be positioned on the right.



Linked items

Linkify list group items by using anchor tags instead of list items (that also means a parent <div> instead of an). No need for individual parents around each element.

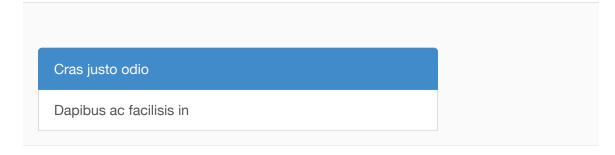

XAMPLE
Morbi leo risus
Porta ac consectetur ac
Vestibulum at eros

Custom content

Add nearly any HTML within, even for linked list groups like the one below.

EXAMPLE

List group item heading

Donec id elit non mi porta gravida at eget metus. Maecenas sed diam eget risus varius blandit.

List group item heading

Donec id elit non mi porta gravida at eget metus. Maecenas sed diam eget risus varius blandit.

List group item heading

Donec id elit non mi porta gravida at eget metus. Maecenas sed diam eget risus varius blandit.

Panels

While not always necessary, sometimes you need to put your DOM in a box. For those situations, try the panel component.

Basic example

By default, all the .panel does is apply some basic border and padding to contain some content.

Basic panel example

Panel with heading

Easily add a heading container to your panel with .panel-heading. You may also include any <h1> - <h6> with a .panel-title class to add a pre-styled heading.

Panel heading without title

Panel content

Panel title




Panel with footer

Wrap buttons or secondary text in .panel-footer. Note that panel footers do not inherit colors and borders when using contextual variations as they are not meant to be in the foreground.



Contextual alternatives

Like other components, easily make a panel more meaningful to a particular context by adding any of the contextual state classes.

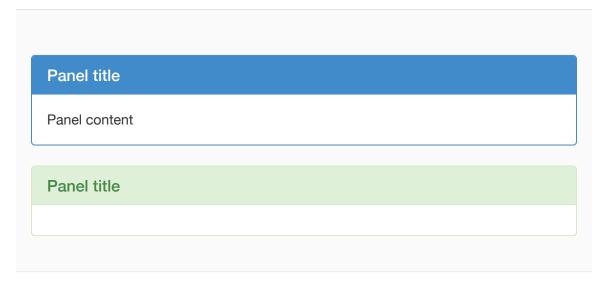

EXAMPLE			
Panel content			
Panel title			
Panel content			
Panel title			
Panel content			
Panel title			
Panel content			

With tables

Add any non-bordered .table within a panel for a seamless design. If there is a .panel-body , we add an extra border to the top of the table for separation.

Panel heading

Some default panel content here. Nulla vitae elit libero, a pharetra augue. Aenean lacinia bibendum nulla sed consectetur. Aenean eu leo quam. Pellentesque ornare

sem lacinia quam venenatis vestibulum. Nullam id dolor id nibh ultricies vehicula ut id elit.

#	First Name	Last Name	Username
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry	the Bird	@twitter

If there is no panel body, the component moves from panel header to table without interruption.

EXAMPLE

Pan	Panel heading			
#	First Name	Last Name	Username	
1	Mark	Otto	@mdo	
2	Jacob	Thornton	@fat	
3	Larry	the Bird	@twitter	

With list groups

Easily include full-width list groups within any panel.

Panel heading

Some default panel content here. Nulla vitae elit libero, a pharetra augue. Aenean lacinia bibendum nulla sed consectetur. Aenean eu leo quam. Pellentesque ornare sem lacinia quam venenatis vestibulum. Nullam id dolor id nibh ultricies vehicula ut id elit.

Cras justo odio

Dapibus ac facilisis in

Morbi leo risus

Porta ac consectetur ac

Vestibulum at eros

Wells

Default well

Use the well as a simple effect on an element to give it an inset effect.

