

Project PRIME

Students: Fabrizio Mazzone, Mattia Proietto

Company: Ubble

Task: Face matching

Useful Datasets for face recognition

1. **YouTube Faces DB:** [Link](#)

a database of face videos designed for studying the problem of unconstrained face recognition in videos. The data set contains 3,425 videos of 1,595 different people. All the videos were downloaded from YouTube. An average of 2.15 videos are available for each subject. The shortest clip duration is 48 frames, the longest clip is 6,070 frames, and the average length of a video clip is 181.3 frames.

State: Free and easy to download

Size: 24 GB

Username: wolftau

Password: wta1997

2. **NRC-IIT Facial Video Database:** [link](#)

This database contains pairs of short video clips each showing a face of a computer user sitting in front of the monitor exhibiting a wide range of facial expressions and orientations as captured by an Intel webcam mounted on the computer monitor.

The video capture resolution is kept to 160 x 120. With the face occupying 1/4 to 1/8 of the image (measured by width), this translates into a commonly observed on a TV screen situation when a face of a TV show occupies 1/8 to 1/16 of the screen. It could be good as an initial test for the algorithm

State: Free and easy to download

3. Faces 1999

Frontal face dataset. 450 face images. 896 x 592 pixels. Jpeg format.

27 or so unique people under with different lighting/expressions/backgrounds.

ImageData.mat is a Matlab file containing the variable


SubDir_Data which is an 8 x 450 matrix. Each column of this matrix hold the coordinates of the face within the image, in the form:

```
[x_bot_left y_bot_left x_top_left y_top_left ...  
x_top_right y_top_right x_bot_right y_bot_right]
```

State: Downloaded (Fabrizio's laptop)

Size: < 100 MB

Drawbacks: ok white and asian people, **no black ones**

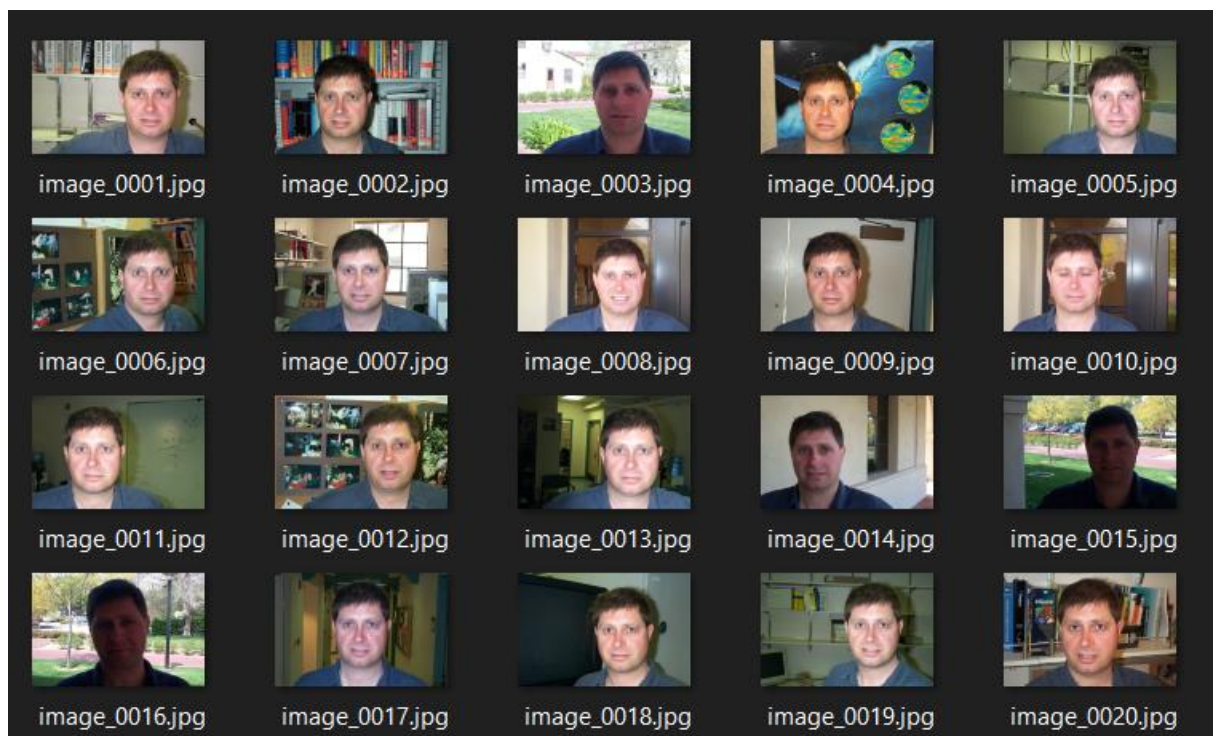

4. Yale Face DataSet : [link](#)

The Yale Face Database (size 6.4MB) contains 165 grayscale images in GIF format of 15 individuals. There are 11 images per subject, one per different facial expression or configuration: centre-light, w/glasses, happy, left-light, w/no glasses, normal, right-light, sad, sleepy, surprised, and wink. Could be useful in the initial process.

State: free to download

5. Face Recognition Data, University of Essex, UK: [link](#)

395 individuals (male and female), 20 images per individual. Contains images of people of various racial origins, mainly of first year undergraduate students, so the majority of individuals are between 18-20 years old but some older individuals are also present. Some individuals are wearing glasses and beards. The data is held in four directories (faces94 , faces95 , faces96 , grimace), in order of increasing difficulty. Faces96 and grimace are the most difficult, though for two different reasons (variation of background and scale, versus extreme variation of expressions).

State: free to download

6. **AR Face Database:** [link](#)

126 people (over 4,000 color images).

Different facial expressions, illumination conditions and occlusions.

Two sessions per person (2 different days).

This face database was created in the Computer Vision Center (CVC) at the U.A.B. It contains over 4,000 color images corresponding to 126 people's faces (70 men and 56 women). Images feature frontal view faces with different facial expressions, illumination conditions, and occlusions (sun glasses and scarf).

The pictures were taken at the CVC under strictly controlled conditions. No restrictions on wear (clothes, glasses, etc.), make-up, hair style, etc. were imposed to participants. Each person participated in two sessions, separated by two weeks (14 days) time. The same pictures were taken in both sessions. This face database is publicly available and can be obtained from this web-site. It is free for academic use. Commercial distribution or any act related to commercial use of this database is strictly prohibited.

State: Free but no easy to get (permission needed, with honour declaration)

7. **Disguised Faces in the Wild dataset:** [link](#)

The DFW dataset consists of 1000 subjects and 11157 images. Pre-defined training and testing splits are provided, where 400 subjects form the training set, while the remaining 600 subjects form the test set. Each subject may contain normal, validation, **disguised**, and **impersonator** images.

So could be useful to test people that can look similar.

State: Free to download / downloaded but need password (Fabrizio's laptop)

Size: 4.5 GB

8. **VidTIMIT Audio-Video Dataset** : [link](#)

The VidTIMIT dataset is comprised of video and corresponding audio recordings of 43 people, reciting short sentences. The dataset was recorded in 3 sessions, with a mean delay of 7 days between Session 1 and 2, and 6 days between Session 2 and 3. In addition to the sentences, each person performed a head rotation sequence in each session. The sequence consists of the person moving their head to the left, right, back to the center, up, then down and finally return to center.

The video of each person is stored as a numbered sequence of JPEG images with a resolution of 512 x 384 pixels.

State: Free to download

9. **UPNA Head Pose Database**: [link](#)

Is a public database of videos for head tracking and pose estimation. The database consists of a set of 120 videos acquired with a standard webcam, corresponding to 10 different subjects (6 males and 4 females) and 12 videos each. Every set of 12 videos is composed of 6 guided-movement sequences and 6 free-movement sequences. In the free sequences, the user moves the head at free will combining translations and rotations along the three spatial axes. Every video begins and ends with the head in a frontal position.

State: Free download

10. **IST-EURECOM Light Field Face Database**: [link](#)

Two separate sessions were performed for each subject with a temporal separation between 1 and 6 months. The database includes 20 image shots per person in each of the two sessions, with several facial variations including emotions, actions, poses, illuminations, and occlusions.

The database can be used not only in the context of face recognition research but also for other research areas such as emotion recognition, gender classification, age estimation, ethnicity classification and face modeling.

State: Free to download but need to ask for permission

Size: 25 part of 4 GB each

11. **I2Head**: [link](#)

For each user, 8 sessions are recorded under controlled movements in static and free head movements' scenarios. Point grids containing

17 and 65 fixations are recorded. For each fixation point, the best 10 frames are selected providing an image and the head poses for each one of the samples. In addition, a simplified head model for each user is provided.

Size: Around 24GB

State: Free download

Useful Algorithms for face recognition

Eigenfaces (1991)

Local Binary Patterns Histograms (LBPH) (1996)

Fisherfaces (1997)

Scale Invariant Feature Transform (SIFT) (1999)

Speed Up Robust Features (SURF) (2006)

1. LBPH: [link](#)

Local Binary Pattern (LBP) is a simple yet very efficient texture operator which labels the pixels of an image by thresholding the neighborhood of each pixel and considers the result as a binary number.

Advantages: easy, based on local features in the images, can achieve, great results, robust.

Implementation: Go, OpenCV

2. PCA (from university studies)

Language: Matlab

3. Self-organizing Map (from university studies)

Language: Python

4. Face Recognition Algorithms: [link](#)

This file contains a description of all the known method to detect and recognise face pictures.

5. Face recognition through Dlib: [link](#)

6. Face recognition through SVM: [link](#)

Language: Python (Dlib)

7. Face recognition through KNN: [link](#)

Language: Python (Dlib)

8. Face recognition live through Webcam: [link](#)

Language: Python (Dlib)

9. Face recognition with OpenCV, Python, and deep learning: [link](#)

Language: Python (Dlib)

10. Video-Based Face Recognition and Face-Tracking using Sparse Representation Based Categorization: [paper link](#)

11. Face Recognition in Video several approaches: [paper link](#)
pages 5 to 15