

The screenshot displays a Windows desktop environment with three active windows:

- Terminal Window (Left):** Running Python 3.13.0. It shows the execution of `python3 final_exam.py`, which outputs `0.1`. The terminal also displays the command prompt and the file path `C:\Users\Fabian\AppData\Local\Programs\Python\Python313\Final_exam.py`.
- Code Editor Window (Middle):** Displays the Python code for `convert_to_dollars`. The code defines a dictionary for coin values, processes a sentence to calculate the total value, and includes an example usage section.
- Web Browser Window (Right):** Shows a search bar with the text "Go to file" and a file explorer view.

The code in the middle window is as follows:

```
def convert_to_dollars(sentence):
    # Basic coin value dictionary
    coin_values = {
        "penny": 0.01,
        "nickel": 0.05,
        "dime": 0.10,
        "quarter": 0.25
    }

    # Assume format like "1 penny and 2 nickels"
    parts = sentence.split(" and ")
    total = 0.0

    for part in parts:
        tokens = part.split()
        if len(tokens) == 2:
            quantity = int(tokens[0])
            coin = tokens[1]
            # Doesn't handle plurals or errors
            value = coin_values.get(coin, 0)
            total += quantity * value

    return str(round(total, 2))

# Example usage
if __name__ == "__main__":
    print(convert_to_dollars("1 penny and 2 nickels")) # Expected: 0.1
```

The screenshot shows a Windows desktop with three windows open:

- IDE Shell 3.13.0\***: A terminal window showing the execution of a Python script. The output indicates that the script is running successfully and displaying the expected result of 0.11.
- Final exam.py - C:\Users\Fabian\AppData\Local\Programs\Python\Python313\Final exam.py...**: A Python script editor showing the code for the `convert_to_dollars` function. The script defines a dictionary of coin values and a function that takes a sentence and returns the total value of the coins mentioned.
- final-exam/spin1 at m...**: A web browser window showing a search bar and a "Go to file" button.

The Python script in the middle window is as follows:


```
def convert_to_dollars(sentence):
    # Basic coin value dictionary
    coin_values = {
        "penny": 0.01,
        "nickel": 0.05,
        "dime": 0.10,
        "quarter": 0.25
    }

    # Assume format like "1 penny and 2 nickels"
    parts = sentence.split(" and ")
    total = 0.0


    for part in parts:
        tokens = part.split()
        if len(tokens) == 2:
            quantity = int(tokens[0])
            coin = tokens[1]
            # Doesn't handle plurals or errors
            value = coin_values.get(coin, 0)
            total += quantity * value

    return str(round(total, 2))


# Example usage
if __name__ == "__main__":
    print(convert_to_dollars("4 dimes and 7 quarters")) # Expected: 0.1
```

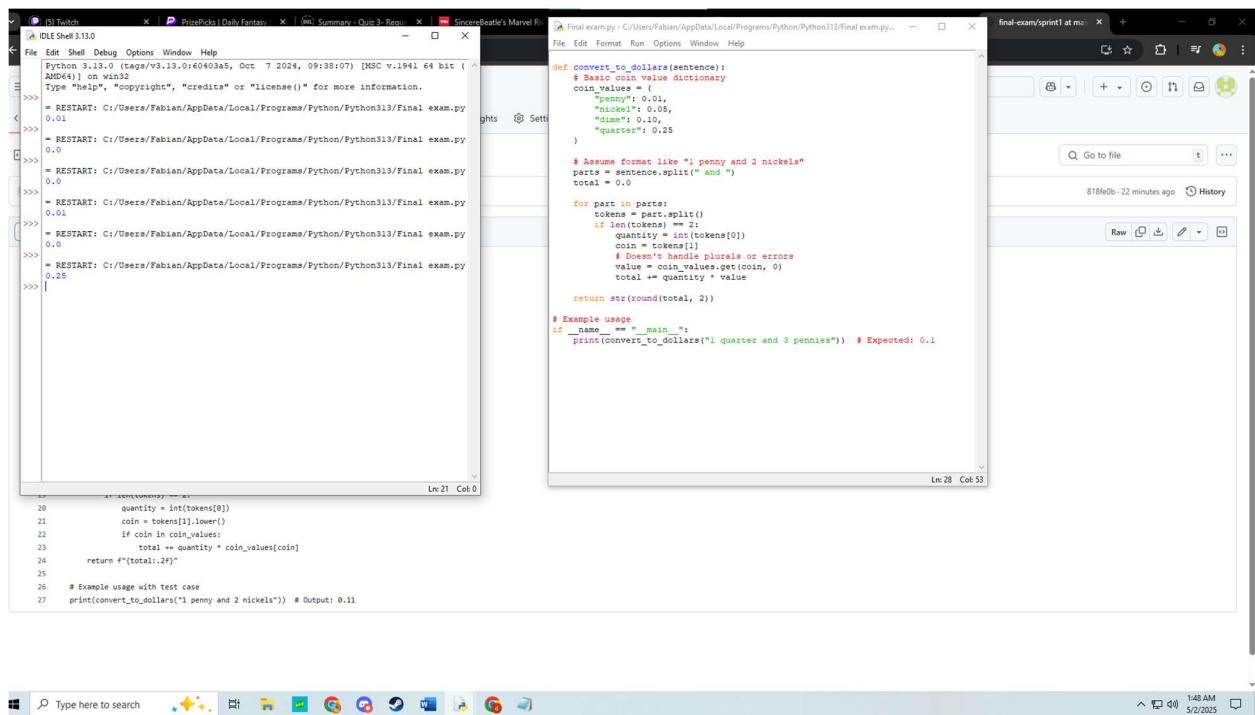


1 quarter and 3 pennies failed

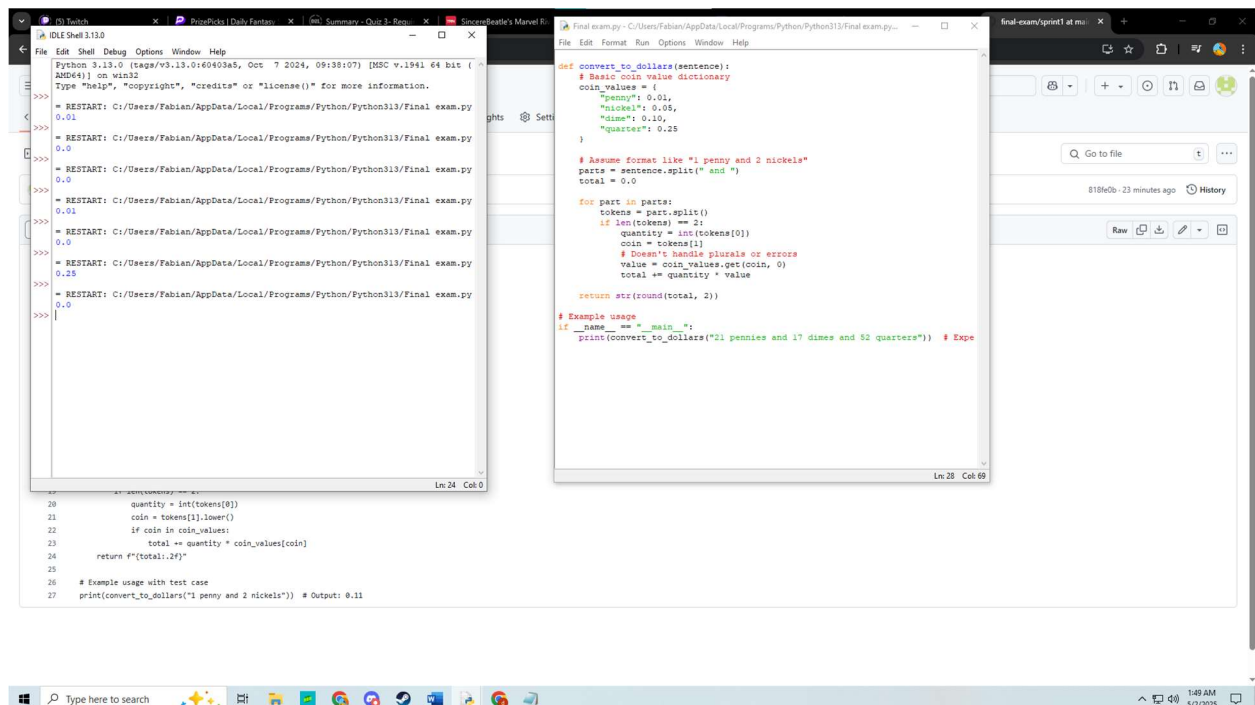

21 pennies and 17 dimes and 52 quarters failed

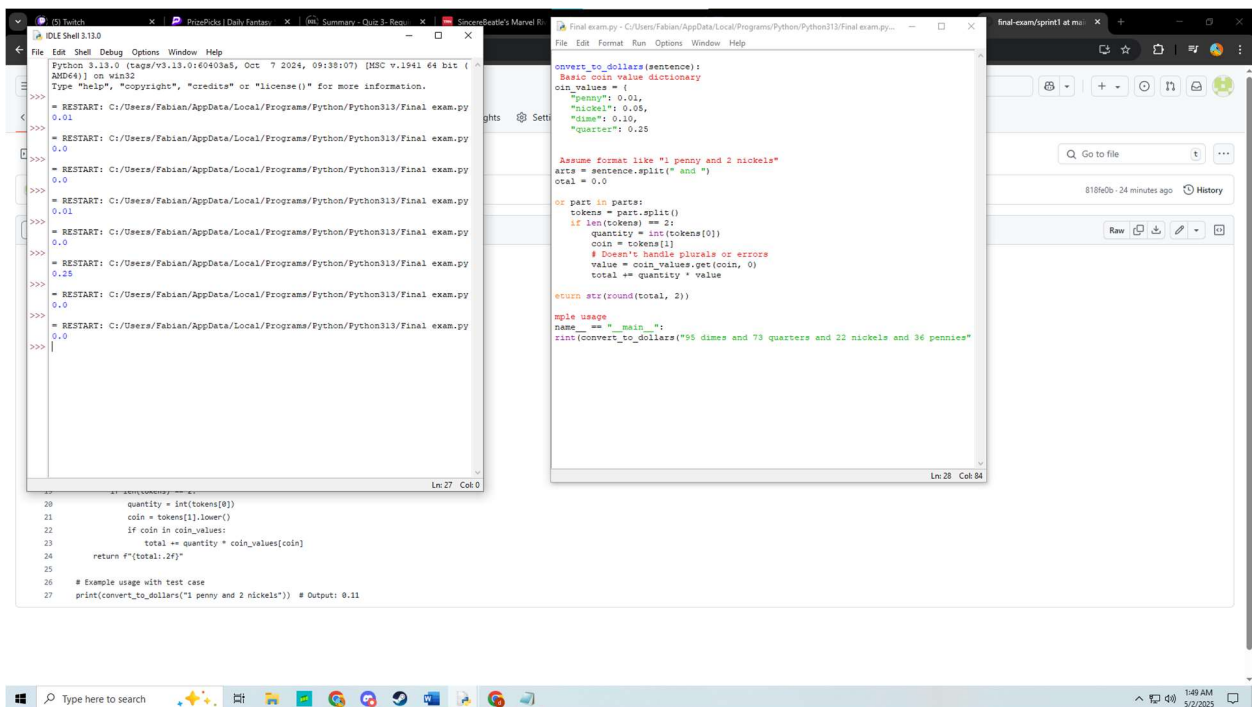

95 dimes and 73 quarters and 22 nickels and 36 pennies failed

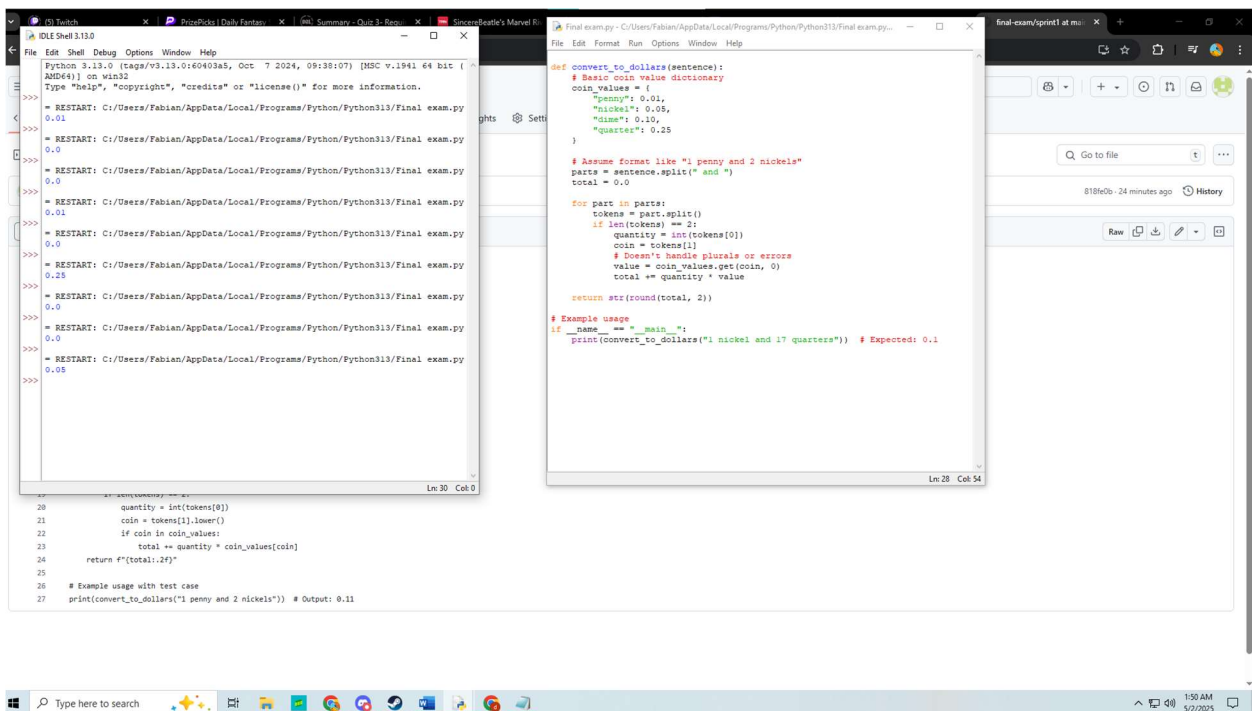

1 nickel and 17 quarters failed

```
Python 3.13.0 (tags/v9.13.0:60403a5, Oct 7 2024, 09:18:07) [MSC v.1941 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.01
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.01
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.25
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.05
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>>

def convert_to_dollars(sentence):
    # Basic coin value dictionary
    coin_values = {
        "penny": 0.01,
        "nickel": 0.05,
        "dime": 0.10,
        "quarter": 0.25
    }

    # Assume format like "1 penny and 2 nickels"
    parts = sentence.split(" and ")
    total = 0.0

    for part in parts:
        tokens = part.split()
        if len(tokens) == 2:
            quantity = int(tokens[0])
            coin = tokens[1]
            # Doesn't handle plurals or errors
            value = coin_values.get(coin, 0)
            total += quantity * value

    return str(round(total, 2))

# Example usage
if __name__ == "__main__":
    print(convert_to_dollars("1 penny and 2 nickels")) # Expected: 0.11
```

21 nickels and 15 pennies failed

```
Python 3.13.0 (tags/v9.13.0:60403a5, Oct 7 2024, 09:18:07) [MSC v.1941 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.01
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.01
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.25
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.05
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.0
>>> = RESTART: C:/Users/Fabian/AppData/Local/Programs/Python/Python313/Final exam.py
0.41
>>>

def convert_to_dollars(sentence):
    # Basic coin value dictionary
    coin_values = {
        "penny": 0.01,
        "nickel": 0.05,
        "dime": 0.10,
        "quarter": 0.25
    }

    # Assume format like "1 penny and 2 nickels"
    parts = sentence.split(" and ")
    total = 0.0

    for part in parts:
        tokens = part.split()
        if len(tokens) == 2:
            quantity = int(tokens[0])
            coin = tokens[1]
            # Doesn't handle plurals or errors
            value = coin_values.get(coin, 0)
            total += quantity * value

    return str(round(total, 2))

# Example usage
if __name__ == "__main__":
    print(convert_to_dollars("1 dime and 1 nickel and 1 penny and 1 quarter"))
```

1 dime and 1 nickel and 1 penny and 1 quarter pass