

No bugs on this one

The screenshot shows a VS Code editor with a Python script named `Sprint2.py` and its output in the terminal. The script defines a function `convert_to_dollars(sentence)` that takes a sentence of coins and returns the total value in dollars. The output shows the function being called with the input `"1 penny and 2 nickels"` and returning `0.11`.

```
def convert_to_dollars(sentence):  
    # Coin Values including plural forms  
    coin_values = {  
        "penny": 0.01, "pennies": 0.01,  
        "nickel": 0.05, "nickels": 0.05,  
        "dime": 0.10, "dimes": 0.10,  
        "quarter": 0.25, "quarters": 0.25  
    }  
  
    parts = sentence.lower().split(" and ")  
    total = 0.0  
  
    for part in parts:  
        tokens = part.strip().split()  
        if len(tokens) == 2:  
            try:  
                quantity = int(tokens[0])  
                coin = tokens[1]  
                value = coin_values.get(coin)  
                if value is not None:  
                    total += quantity * value  
            except ValueError:  
                print(f"Warning: Unknown coin '{coin}' ignored.")  
            except ValueError:  
                print(f"Warning: Could not parse quantity '{tokens[0]}'")  
  
    return str(round(total, 2))  
  
# Example usage  
if __name__ == "__main__":  
    print(convert_to_dollars("1 penny and 2 nickels"))
```

Output:

```
0.11
```

1 penny and 2 nickels pass


The screenshot shows a VS Code editor with a Python script named `Sprint2.py` and its output in the terminal. The script defines a function `convert_to_dollars(sentence)` that takes a sentence of coins and returns the total value in dollars. The output shows the function being called with the input `"4 dimes and 7 quarters"` and returning `2.15`.

```
def convert_to_dollars(sentence):  
    # Coin Values including plural forms  
    coin_values = {  
        "penny": 0.01, "pennies": 0.01,  
        "nickel": 0.05, "nickels": 0.05,  
        "dime": 0.10, "dimes": 0.10,  
        "quarter": 0.25, "quarters": 0.25  
    }  
  
    parts = sentence.lower().split(" and ")  
    total = 0.0  
  
    for part in parts:  
        tokens = part.strip().split()  
        if len(tokens) == 2:  
            try:  
                quantity = int(tokens[0])  
                coin = tokens[1]  
                value = coin_values.get(coin)  
                if value is not None:  
                    total += quantity * value  
            except ValueError:  
                print(f"Warning: Unknown coin '{coin}' ignored.")  
            except ValueError:  
                print(f"Warning: Could not parse quantity '{tokens[0]}'")  
  
    return str(round(total, 2))  
  
# Example usage  
if __name__ == "__main__":  
    print(convert_to_dollars("4 dimes and 7 quarters"))
```


Output:

```
2.15
```


4 dimes and 7 quarters pass

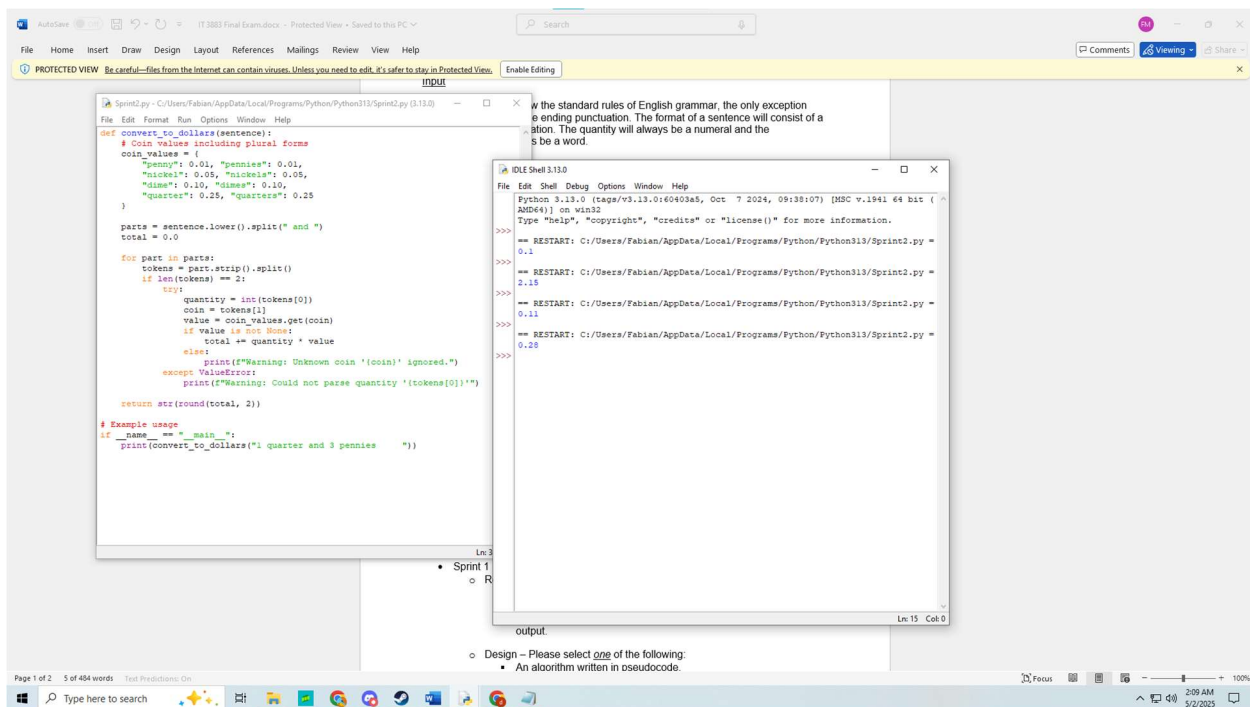


1 quarter and 3 pennies pass

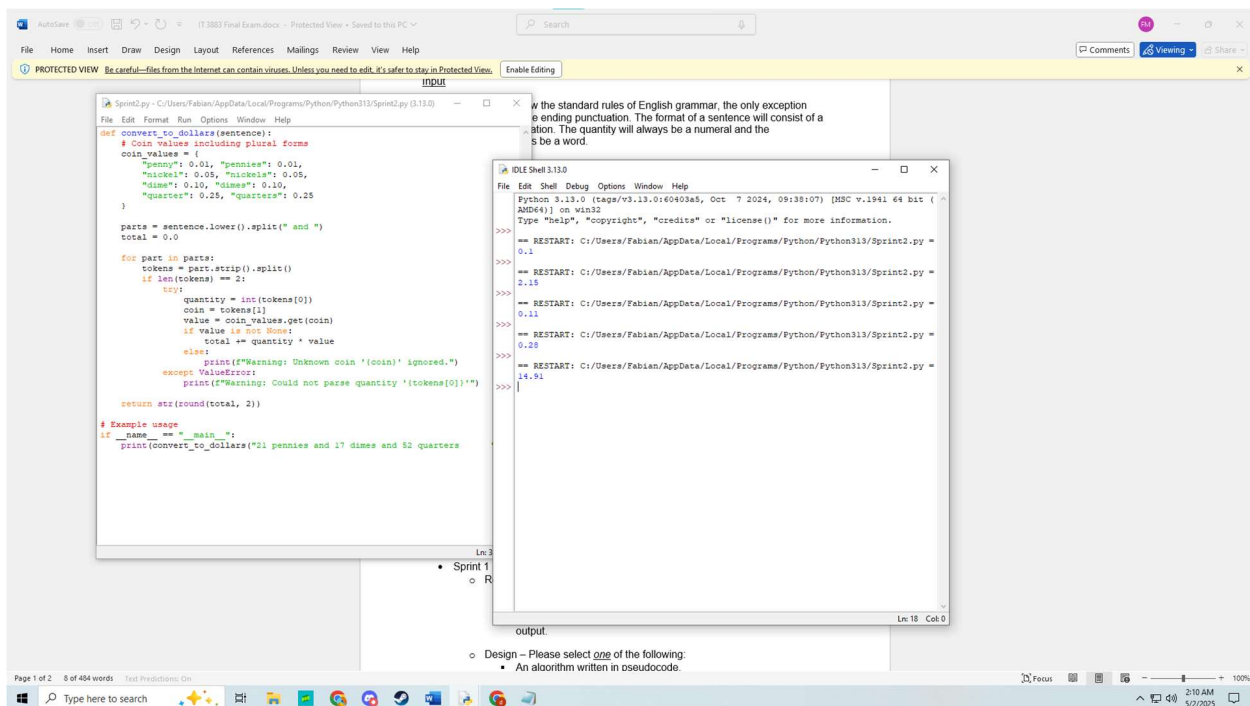


21 pennies and 17 dimes and 52 quarters pass

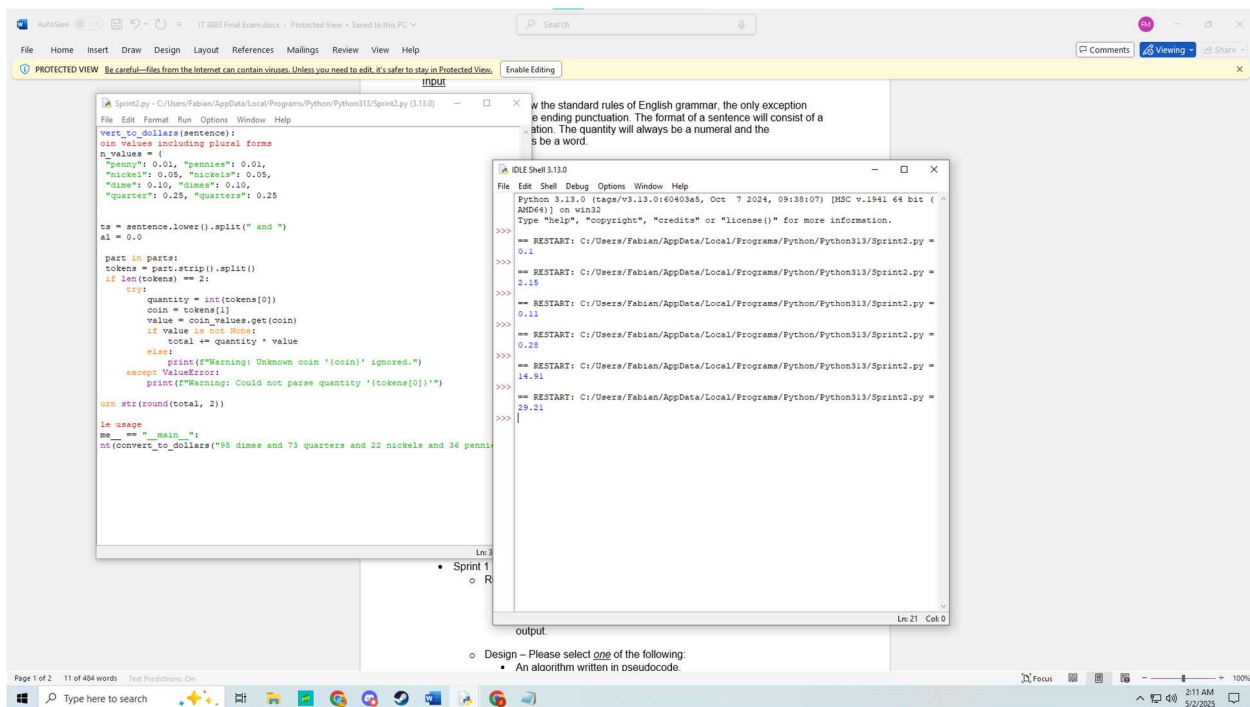


95 dimes and 73 quarters and 22 nickels and 36 pennies pass

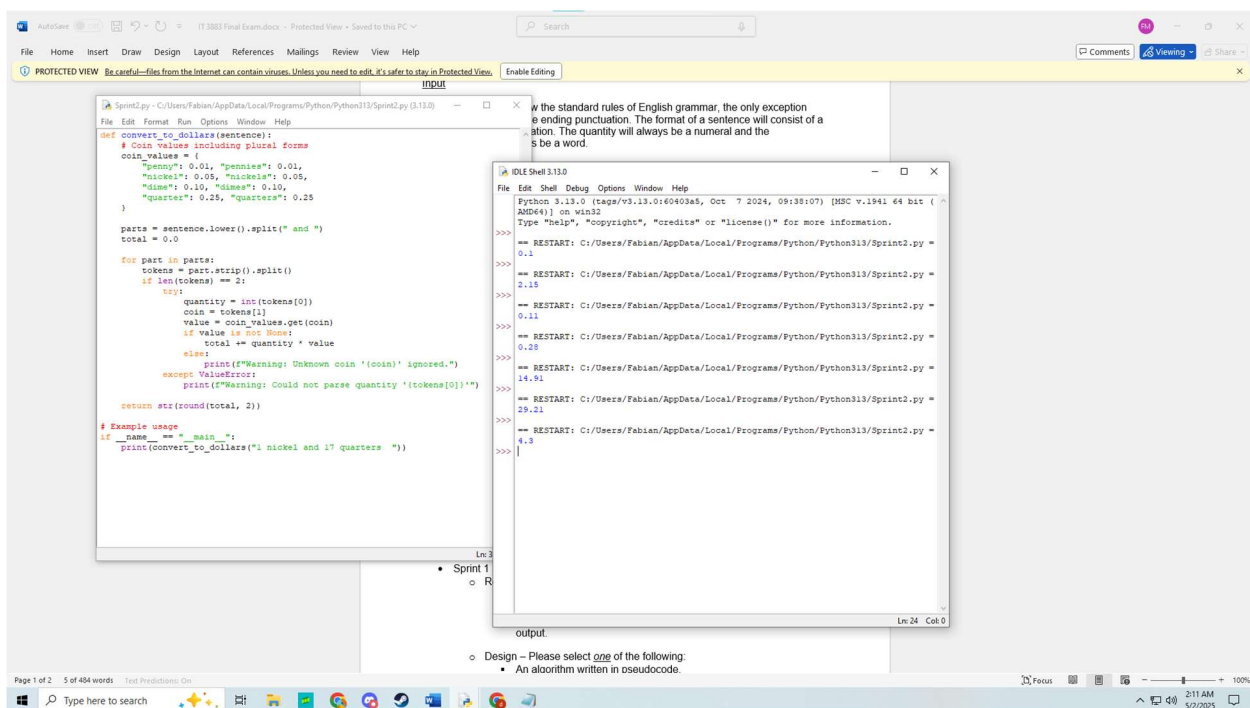

1 nickel and 17 quarters pass

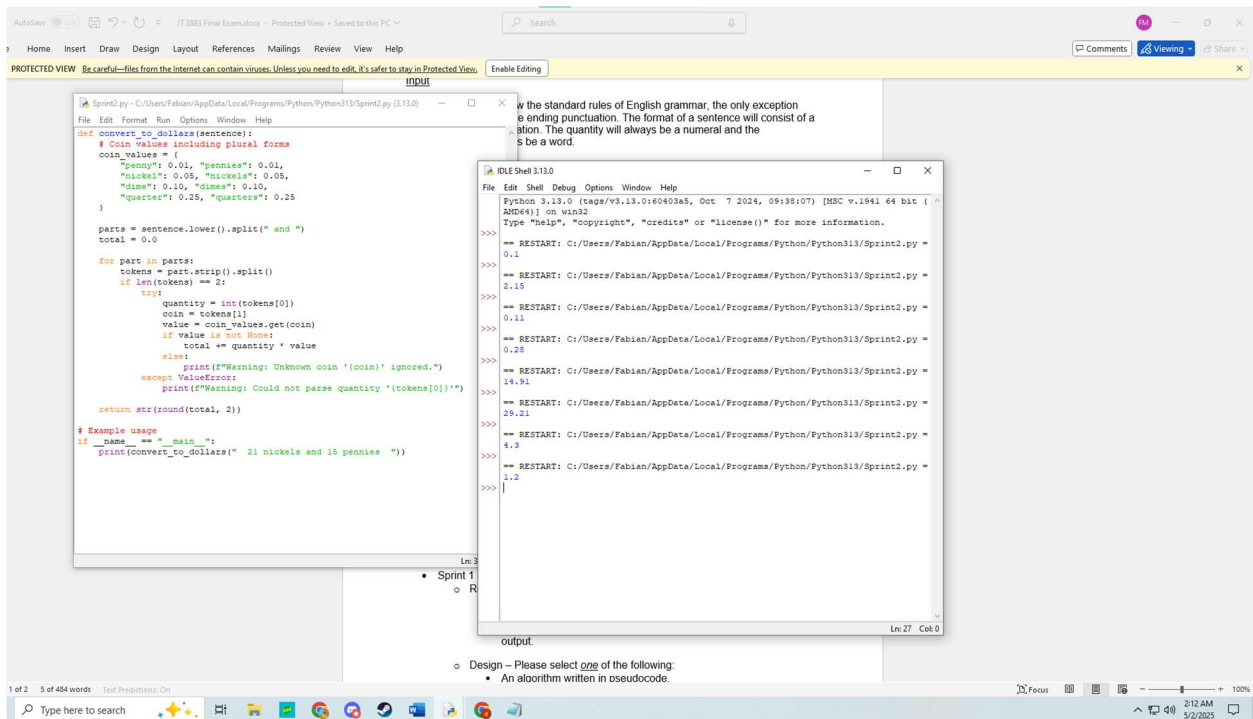

21 nickels and 15 pennies pass

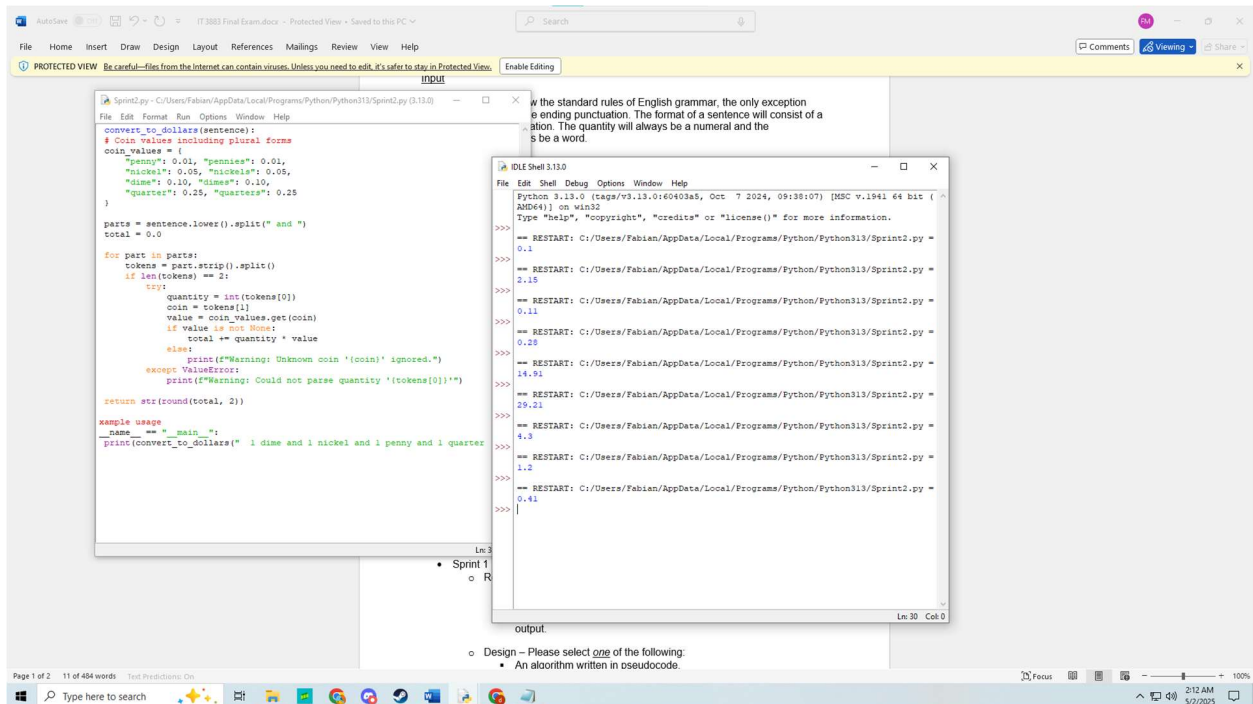

1 dime and 1 nickel and 1 penny and 1 quarter pass