

# Decision Tree on Hadoop

Md. Nazmul Alam (40016332), Newman (29469354)

April 25, 2017

# Contents

	Page
<b>1 Introduction</b>	<b>4</b>
<b>2 Map Reduce</b>	<b>4</b>
<b>3 Hadoop Architecture</b>	<b>6</b>
3.1 Overview . . . . .	6
3.2 Basic Architecture . . . . .	6
3.3 Setting Up Hadoop Cluster . . . . .	7
3.3.1 Single Node Setup . . . . .	8
3.3.2 Multi Node Setup . . . . .	9
<b>4 Word count</b>	<b>9</b>
4.1 Problem Overview . . . . .	9
4.2 Algorithm . . . . .	10
4.3 Source Code . . . . .	10
4.4 Analysis . . . . .	11
4.5 Results . . . . .	12
<b>5 Matrix multiplication</b>	<b>12</b>
5.1 Problem Overview . . . . .	12
5.2 Algorithm . . . . .	13
5.3 Code Snippet . . . . .	13
5.4 Analysis . . . . .	15
5.5 Results . . . . .	15
<b>6 Decision tree</b>	<b>16</b>
6.1 Problem Overview . . . . .	16
6.2 Literature Review . . . . .	16
6.3 Methodology . . . . .	17
6.4 Decision Tree Concept: Entropy . . . . .	17
6.5 Decision Tree Concept: Information Gain . . . . .	18
6.6 Algorithm . . . . .	18
6.7 Code Snippets . . . . .	19
6.8 Analysis . . . . .	24
6.9 Conclusion . . . . .	24

## List of Algorithms

1	Word Count Mapper . . . . .	10
2	Word Count Reducer . . . . .	10
3	Matrix Mul Mapper . . . . .	13
4	Matrix Mul Reducer . . . . .	13

5	Attribute Table Mapper . . . . .	18
6	Attribute Table Reducer . . . . .	18
7	Attribute Table Reducer 2 . . . . .	18
8	Attribute Selection Mapper . . . . .	19
9	Attribute Selection Reducer . . . . .	19
10	Attribute Selection Reducer 2 . . . . .	19
11	Tree Grow Reducer . . . . .	19

## Code Snippets

1	Hadoop CoreSite Config . . . . .	8
2	Hadoop HDFS Config . . . . .	8
3	Hadoop MapRed Config . . . . .	9
4	Word count mapper code . . . . .	11
5	Word count reducer code . . . . .	11
6	Matrix multiplication mapper code snippet . . . . .	13
7	Matrix multiplication reducer code snippet . . . . .	14
8	Attrib Table Mapper code snippet . . . . .	19
9	Attrib Table Reducer code snippet . . . . .	20
10	Attrib Table Reducer 2 code snippet . . . . .	21
11	Attrib Selection Mapper code snippet . . . . .	22
12	Attrib Selection Reducer code snippet . . . . .	23
13	Attrib Selection Reducer 2 code snippet . . . . .	23

# 1 Introduction

Decision trees are commonly used in operations research, specifically in decision analysis, to help identify a strategy most likely to reach a goal, but are also a popular tool in machine learning[1]. However running decision tree on large dataset sequentially takes a lot of time. So, the natural evolution to optimize the sequential algorithm is to introduce parallel decision tree algorithm. Unlike sequential algorithm, parallel algorithm sometimes often tied to the parallel architecture on which it runs. Again, parallel architectures are not easily exposed or available to the algorithm itself. Hadoop implements MapReduce paradigm on commodity hardware in a distributed environment. The MapReduce paradigm reduces the complexity of programming and coordination of each node separately.

This report explores an algorithm for decision tree, which is implemented on hadoop, looks into the performance and covers some analysis of it. Following section describes the organization of this report.

Firstly the report covers about the MapReduce paradigm itself and how it works. This will give the reader a sense how an algorithm, intended to be implemented on a MapReduce environment, should be approached.

Next section will cover a simplified overview of the hadoop architecture and how to set up a two node cluster.

Next two sections will cover MapReduce version of word counting and matrix multiplication algorithms to enable the reader to visualize how an algorithm works in the MapReduce paradigm.

In the next section the report focuses on the main problem, decision tree. The report goes through the problem statement, current state of art and tries to give an overview of the problem. Then the report will look into the algorithm and how it works. Finally it provides the algorithms and code snippets along with the results for empirical studies of the algorithm in future. In the closing sections, we will briefly go over possible future works and then draw the conclusion.

# 2 Map Reduce

Map reduce paradigm was first published in 2004 by Googles white paper. The idea behind it was to distribute large set of data to multiple workers, whom will work in parallel. After their work all the output are gathered and then another round of operation is performed to generate the final output. This kind of idea generally seems to be divide and conquer. Where large set of data is broken down and passed to initial workers. The operation performed by the initial worker is called map function, and trivially the workers are termed mapper. All the node executes the same mapper on a subset of the dataset and generate intermediate output. Then the output is grouped and passed to another set of worker. The operation performed by these worker are called reduce function,

and the workers are termed reducer. So, from a high-level mapreduce paradigm has 3 steps -

- Map
- Combine/Shuffle
- Reduce

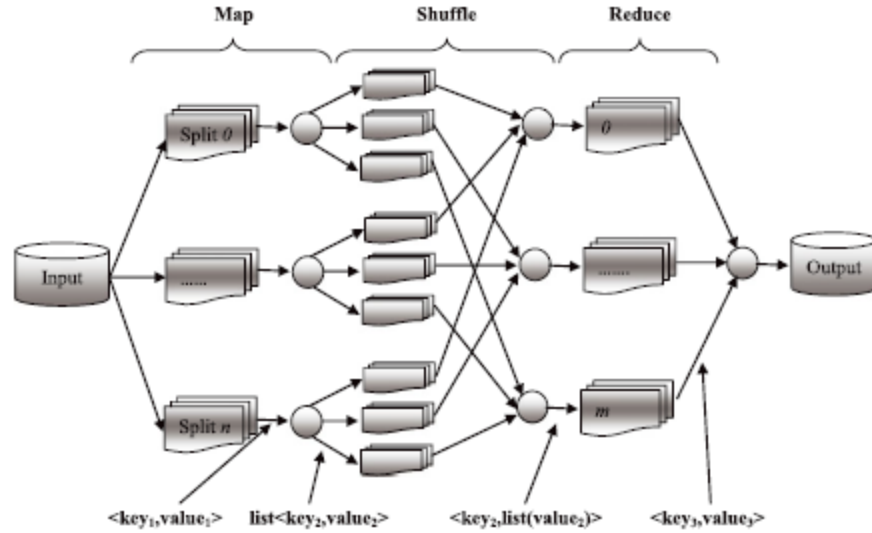


Figure 1: Map Reduce Paradigm

To be highly distributed, there is no state kept between mapper or reducer. Hence MapReduce model was designed to work only with key, value pair data. So, in a typical MapReduce program it takes in input data as key, value pair, perform map function to produce intermediate results containing a new key, value pairs, group the results from each mapper into key, listvalues and passes this new input to the reducer. Once the reducer performs the reduce operation a new key, value pair will be generated as output. Generally a programmer is concerned with the implementation of map and reduce function and let the default shuffle/combine operation to take place. However, generally implementation of this paradigm also supports different Combine/Shuffle operation for complex requirements. In the next section we discuss about an open source implementation of the MapReduce paradigm named Apache Hadoop.

## 3 Hadoop Architecture

### 3.1 Overview

Hadoop is an open source implementation of the MapReduce paradigm. It is written in java. It generally supports any map/reduce implementation which runs on JVM (e.g java, scala), however it can also support other language implementation via streaming api. From a very high level, the main components of Hadoop are -

- HDFS
- Task Manager
- Job Tracker
- Name node
- Data Node

The overall architecture is shown in figure 2[2].

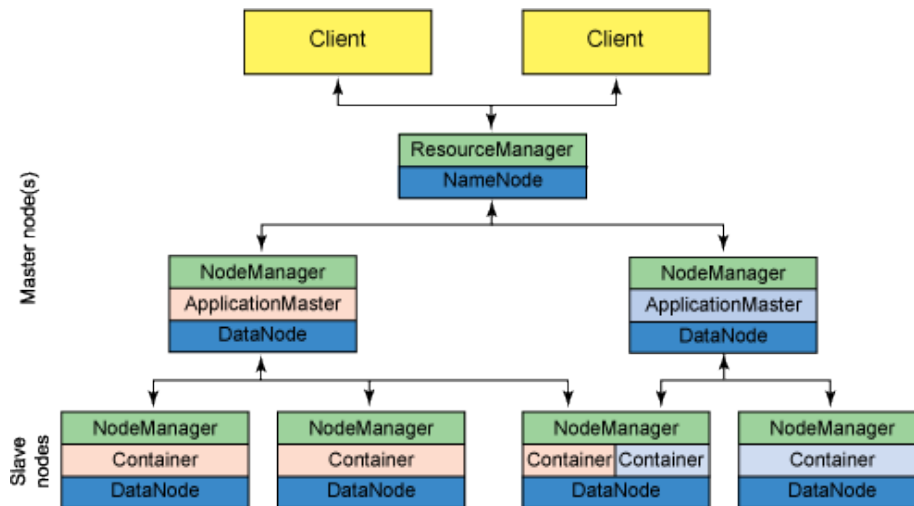


Figure 2: Hadoop Architecture

### 3.2 Basic Architecture

HDFS is the Hadoop Distributed File System, which makes sure the data replication on each of Datanode. So, any input or output written to HDFS by one node is available to any other node within that cluster. This abstracts the distributed programming complexities and let the programmer focus on actual algorithm.

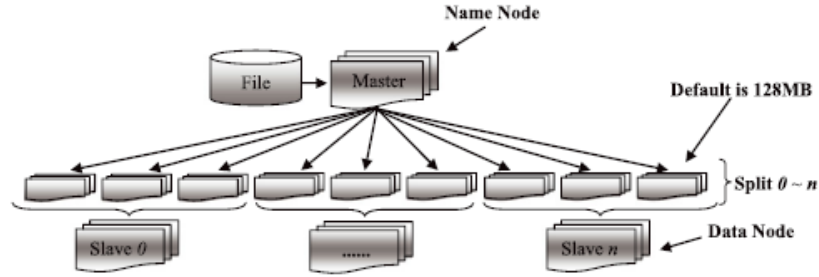


Figure 3: Map Reduce Paradigm

Task Manager in the hadoop framework is responsible for distributing the MapReduce application to appropriate data node. More generally speaking its main task is to distribute the MapReduce task in each of the node and track its status.

Job Tracker generally runs in datanode. The main functionality of it to run the assigned MapReduce task in the node and report back its status to Task manager.

Name node component defines the master node within the cluster. So, in the whole cluster there will be a single namenode.

Data node component defines the slave nodes within the cluster. Each processing node will have a component as datanode.

A very high level relationship between these component is shown in figure 3 [3].

### 3.3 Setting Up Hadoop Cluster

This section provides a high level instruction on how to set up a hadoop cluster on linux system. At the time of writing this report, the stable version of apache hadoop was 2.7.3 [6].

Hadoops binary distributions are pretty much self contained. The only dependencies hadoop have are Java SDK and SSH-server. So, in linux system one should install Java SDK (openjdk), ssh-server (e.g- openssh-server) and ssh-client (generally preinstalled). After downloading the binary distribution, it should be extracted and placed on the desired location (e.g /usr/local/hadoop). It is not required but recommended to create an user account (e.g - hduser) to sandbox the access of hadoop. In next section it is provided how to setup a single node hadoop. Once the individual single node are setup a simple configuration will easily link them to make a two node setup.

### 3.3.1 Single Node Setup

Following instruction should be completed to enable single node hadoop setup on a system -

- Generate ssh public/private key pair. Install the key on hduser account to enable auto login without any password.
- Add HADOOP\_DIR, JAVA\_HOME in the environment variable
- Edit \${HADOOP\_DIR}/etc/hadoop/core-site.xml and add the following  
-

Code Snippet 1: Hadoop CoreSite Config

```
1 <property>
2   <name>fs.defaultFS</name>
3   <value>hdfs://master:9000</value>
4 </property>
```

Here the master is the IP address of the master node.

- Edit \${HADOOP\_DIR}/etc/hadoop/hdfs-site.xml and add the following  
-

Code Snippet 2: Hadoop HDFS Config

```
1 <property>
2   <name>dfs.replication</name>
3   <value>2</value>
4 </property>
5 <property>
6   <name>dfs.permission</name>
7   <value>>false</value>
8 </property>
9 <property>
10  <name>dfs.namenode.name.dir</name>
11  <value>/usr/local/hadoop/hadoop_dir/namenode</value>
12 </property>
13 <property>
14  <name>dfs.datanode.data.dir</name>
15  <value>/usr/local/hadoop/hadoop_dir/datanode</value>
16 </property>
```

The value for name.dir and data.dir are used for namenode and datanode respectively. So, it must be ensured that these directory existed.



- Copy the `${HADOOP_DIR}/etc/hadoop/mapred-site.xml.template` to `${HADOOP_DIR}/etc/hadoop/mapred-site.xml` and add the following -

Code Snippet 3: Hadoop MapRed Config

```

1 <property>
2   <name>mapreduce.framework.name</name>
3   <value>yarn</value>
4 </property>

```

- Format the namenode using `hdfs` tool provided in the hadoop distribution

At this point single node setup is complete, to start hadoop issue `start-dfs.sh` and `start-yarn.sh` subsequently.

### 3.3.2 Multi Node Setup

Following instruction should be completed to enable multi node hadoop setup -

- Add master `ssh-pubkey` to the trusted `ssh-keys` in the slaves. This enables autologin without any password.
- Make sure each node can run in single node setup
- Create a new file in the master node `${HADOOP_DIR}/etc/hadoop/slaves` and enter all the slave IPs (including master if it is also a datanode)

At this point multi node setup is complete, to start hadoop issue `start-dfs.sh` and `start-yarn.sh` on the master to enable auto start of every slave as datanode.

## 4 Word count

### 4.1 Problem Overview

Word count problem is an introductory program in MapReduce paradigm. It is very easy to parallelize and gives a very clear overview how MapReduce works.

Word count as the name implies counts the number of unique words in a file, our implementation is case insensitive. If the dataset is very large then the sequential algorithm will take a long time to do the counting. To use a parallel algorithm for it in MapReduce, it is important to think about how the input `{key,value}` pair should be prepared. What the mapper should produce and how the reducer will consume this to calculate the final result. To fit this problem to the MapReduce pattern we start by creating a map function that can take the dataset and create a `{key,value}` pair. This can be done by taking each word in a the dataset and using that word as the key and the value as 1. For example the sentence "A This is a word". Would map to

`{"A", 1 }`

```

{"This", 1 }
{"is", 1 }
{"a", 1 }
{"a", 1 }
{"word", 1 }

```

The reduce part of the problem would take the {key, value} pairs and generate.

```

{"A", 1 }
{"This", 1 }
{"is", 1 }
{"a", 2 }
{"word", 1 }

```

In the section below we define the algorithm in psuedo code and one possible implementation in Python.

## 4.2 Algorithm

For mapper, the algorithm 1 emits the word and count 1. In the reducer, the algorithm 2 emits the word and sum of the count.

---

### Algorithm 1: Word Count Mapper

---

```

input : (row_id, text_split)
output: (word, 1)

1 foreach word  $\in$  text_split do
2   | emit (word, 1)

```

---



---

### Algorithm 2: Word Count Reducer

---

```

input : (word, list(count))
output: (word, sum)

1 sum  $\leftarrow$  0
2 foreach count  $\in$  list(count) do
3   | sum  $\leftarrow$  sum + count
4 emit (word, sum)

```

---

## 4.3 Source Code

Code Snippet 4: Word count mapper code

```

1      import sys
2
3
4      for line in sys.stdin:
5          keys = line.strip().split()
6          for key in keys:
7              value = 1
8              print( "%s\t%d" % (key, value) )

```

Code Snippet 5: Word count reducer code

```

1      import sys
2
3      last_key = None
4      running_total = 0
5      count_map = {}
6
7      for input_line in sys.stdin:
8          input_line = input_line.strip()
9          this_key, value = input_line.split("\t",
10             1)
11          value = int(value)
12          count_map[this_key] = count_map.get(
13             this_key, 0) + value
14          if last_key is None :
15              last_key = this_key
16          if last_key != this_key:
17              print( "%s\t%d" % (last_key,
18                 count_map.get(last_key, 0)) )
19              last_key = this_key
20
21      print( "%s\t%d" % (last_key, count_map.get(
22         last_key, 0)) )

```

## 4.4 Analysis

The sequential algorithm is  $\mathcal{O}(n)$  since we have to touch each word in order to count it, since we have  $n$  words this is  $\mathcal{O}(n)$ . For a parallel algorithm with  $p$  processors and in each processor we count  $\frac{n}{p}$  words. So this is  $\mathcal{O}(\frac{n}{p})$ .

Parallel Algorithm Time,  $T_p = \mathcal{O}(\frac{n}{p})$

Naive Sequential Algorithm,  $T_s = \mathcal{O}(n)$

Number of processor,  $p = p$

$$\text{Speedup, } S = T_s/T_p = \frac{\mathcal{O}(\frac{n}{p})}{\mathcal{O}(n)} = \mathcal{O}(1)$$

$$\text{Efficiency, } E = S/p = \frac{\mathcal{O}(1)}{p} = \mathcal{O}(\frac{1}{p})$$

## 4.5 Results

# 5 Matrix multiplication

## 5.1 Problem Overview

Matrix multiplication is a very common but highly practical operation. The problem of matrix multiplication is believed to be first formalized in 19th century, however proof does exist that it was being used even before that. There are many practical usage of large matrix multiplication, for example - simulation of galaxy systems, data analysis/mining, solving equations and many more.

Matrix multiplication can be defined as the multiplication of two matrix  $A_{P \times Q}$ ,  $B_{Q \times R}$  to generate resultant matrix  $C_{P \times R}$  where  $C_{(i,j)}$  is defined as

$$C_{(i,j)} = \sum_{k=1}^Q A_{i,k} * B_{k,j} \quad (1)$$

In order to parallelize the matrix multiplication on a MapReduce paradigm, it is required to figure out -

- The input format
- The intermediate output from mapper
- How reducer will make the final result

From 1 it is evident that for to calculate the elements in a single row of the resultant matrix C, all of the values from the same row of A is required and all the values from the same column of B is required. In other words, to calculate the result for any  $C_{(i,j)}$  the value  $A_{(i,0)} \dots A_{(i,R)}$  and  $B_{(0,j)} \dots B_{(P,j)}$  must be passed to a reducer. This simple analysis provides hints on the mappers output.

The map function needs to output for each value within a  $row_x$  in A as  $I_{(x,0)}, I_{(x,1)} \dots I_{(x,R)}$  and for each value within a  $col_y$  in B it needs to produce  $I_{(0,y)}, I_{(1,y)} \dots I_{(P,y)}$ . All the  $I$  values with same key will be collected in the Shuffle/Combine step of map reduce. This ensures that a particular reducer will have all the values to compute 1 for a particular i,j.

The input of a particular matrix is given as  $(MatrixId, i, j, Value)$  for each value of that matrix.

## 5.2 Algorithm

---

### Algorithm 3: Matrix Mul Mapper

---

**input** : (row\_id, (matrix\_id, i, j, value))  
**output**: ((a,b), (matrix\_id,j,value))

```

1  $Q \leftarrow \text{GetColumnSize}(B)$ 
2  $P \leftarrow \text{GetRowSize}(A)$ 
3 if matrix_id equals A then
4   for  $k \leftarrow 0$  to  $Q$  do
5     emit ((i,k), (matrix_id,j,value))
6 else if matrix_id equals B then
7   for  $k \leftarrow 0$  to  $P$  do
8     emit ((k,j), (matrix_id,i,value))
```

---



---

### Algorithm 4: Matrix Mul Reducer

---

**input** : (a,b), list(matrix\_id, i, value)  
**output**: ((i,j), value)

```

1  $Q \leftarrow \text{GetColumnSize}(A)$ 
2 sort list into M or N based on i
3  $sum \leftarrow 0$ 
4 for  $K \leftarrow 0$  to  $Q$  do
5    $m_{ik} \leftarrow 0$ 
6    $n_{kj} \leftarrow 0$ 
7   if there is a value K for M then
8      $m_{ik} \leftarrow M[K]$ 
9   if there is a value K for N then
10     $n_{kj} \leftarrow N[K]$ 
11     $sum \leftarrow sum + (m_{ik} * n_{kj})$ 
12 emit ((i,k), sum)
```

---

## 5.3 Code Snippet

The Listing 6 shows the java implements of the mapper.

Code Snippet 6: Matrix multiplication mapper code snippet

```

1 protected void map(LongWritable key, Text value, Context
   context)
2     throws IOException, InterruptedException {
3     String [] values = value.toString().split(",");
4     int lim_k = Integer.parseInt(context.
       getConfiguration().get("K"));
```

```

5      int lim_m = Integer.parseInt(context.
6          getConfiguration().get("M"));
7      if (values[0].compareTo("M") == 0) {
8          for(int k=0; k<lim_k; k++) {
9              Text outputKey = new Text();
10             Text outputValue = new Text();
11             // key = i,k
12             outputKey.set(values[1] + "," + k
13                 );
14             // value = M,j,M(ij)
15             outputValue.set("M," + values[2]
16                 + "," + values[3]);
17             context.write(outputKey,
18                 outputValue);
19         }
20     } else {
21         for(int k=0; k<lim_m; k++) {
22             Text outputKey = new Text();
23             Text outputValue = new Text();
24             // key = k,j
25             outputKey.set(k + "," + values
26                 [2]);
27             // values = N,i,N(ij)
28             outputValue.set("N," + values[1]
29                 + "," + values[3]);
30             context.write(outputKey,
31                 outputValue);
32         }
33     }
34 }

```

Listing 7 shows the java implemenentation of the reducer.

Code Snippet 7: Matrix multiplication reducer code snippet

```

1  protected void reduce(Text arg0, Iterable<Text> arg1,
2      Context arg2) throws java.io.IOException,
3      InterruptedException {
4      String [] values;
5      HashMap<Integer, Float> M = new HashMap<Integer,
6          Float>();
7      HashMap<Integer, Float> N = new HashMap<Integer,
8          Float>();
9      int lim_k = Integer.parseInt(arg2.getConfiguration().
10          get("K"));
11      for (Text val : arg1) {
12          values = val.toString().split(",");

```

```

8         if (values[0].compareTo("M") == 0) {
9             M.put(Integer.parseInt(values[1]), Float.
                parseFloat(values[2]));
10        } else {
11            N.put(Integer.parseInt(values[1]), Float.
                parseFloat(values[2]));
12        }
13    }
14
15    float result = 0.0f;
16    float m_ik, n_kj;
17    for(int k=0; k < lim_k; k++) {
18        m_ik = M.containsKey(k) ? M.get(k) : 0.0f;
19        n_kj = N.containsKey(k) ? N.get(k) : 0.0f;
20        result += m_ik * n_kj;
21    }
22
23    arg2.write(null, new Text(arg0.toString() + "," +
        String.valueOf(result)));
24 }

```

## 5.4 Analysis

Let, A and B are the same  $(N, N)$  matrix. The algorithm described above has a mapper time complexity and a reducer time complexity. The time complexity of mapper is  $O(N)$ . This is because for each of the value, it has to produce  $N$  times of that value. The time complexity of reducer is  $O(N)$ . This is because it iterates through  $N$  values of generated items from M and N and produces the final sum. So, the overall time complexity of the parallel algorithm is  $O(N)$

Parallel Algorithm Time,  $T_p = O(N)$

Naive Sequential Algorithm,  $T_s = O(N^3)$

Number of processor,  $p = N^2$ , as there are  $N^2$  values for a particular matrix.

Speedup,  $S = T_s/T_p = O(N^3)/O(N) = O(N^2)$

Efficiency,  $E = S/p = O(N^2)/O(N^2) = O(1)$

## 5.5 Results

For the testing purpose, random values for large matrix was generated using a program. The randomness of the values is dependent upon the pseudo random function provided by the Java library. In a two node hadoop cluster the map reduce application was ran.

In a  $(50, 50)$  A and B matrix the run time for MapReduce was approximately 2.5 seconds.

In a (2000, 2000) A and B matrix the run time for MapReduce was approximately 6.7 seconds.

It is apparant that in hadoop implementation of MapReduce, the disk I/O is the major bottleneck for the performance.

## 6 Decision tree

### 6.1 Problem Overview

### 6.2 Literature Review

There are not many work related to MapReduce based decision tree algorithm.

In sequential algorithm of C4.5 uses the Infomation Gain Ratio as the main bias for selecting an attribute for splitting.

In all literature this has been used but extended in various manner for MapReduce paradigm. In [3] the information gain ratio was calculated from a single round of map and reduce function. While in [4] the information gain ratio was reduced from several MapReduce function which generated information gain and split information gain. In [5] the information gain ratio is computed from the reduction of the map functions, however they write the information gain to a temporaray space which allows a special function to again compute the best attribute to split.

[5] suffers from the fact that in highly distributed manner it might not be the case that the temporary file is avaiable to other node, leading to wrong value for information gain ratio selection. Even if limiting the mapper to step forward will increase the parallel time and thus reducing the overall speedup and efficiency of the algorithm. [4] uses a very simple approach, using a pipeline of multiple map and reduce to build up the best attribute selection. Although it is simple, it incurs a lots of disk I/O in current hadoop implementation. However in recent hadoop implementation various optimization of disk I/O should reduce the issue. [3] uses a more complicated mapper and reducer to select the best attribute. Compare to other two implementation it is much more optimized in term of number of rounds and disk I/O requirements.

As the recursion part of the C4.5 to select the subsequent best attribute, recursion of the MapReduce algorithm is done to slowly build up the solution. In [4], the proposed mechanism used a pipelined version of several MapReduce application, each performing a specific tasks. In [3] and [5] proposed method do not use pipelined version instead they rely on complex mapper and reducer.

In the tree growing part for MapReduce C45, [3], [4] and [5] uses some variant of MapReduce random forest grow algorithm.

One major improvement was proposed in [4] by creating three special table to cache the calculation from previous step to the next step. According to their result, they claimed that with this modification they were able to outperform even with single node hadoop performance comparing with sequential algorithm.



By using complex mapper and reducer, [3] was able to reduce disk I/O overhead and thus increasing the overall algorithm performance. According to their claim, the proposed algorithm scales very well with commodity hardware.

### 6.3 Methodology

### 6.4 Decision Tree Concept: Entropy

Generally, entropy refers to disorder or uncertainty. In Information theory, entropy is the expected value (average) of the information contained in each message. 'Messages' can be modeled by any flow of information [7]. In plain sentence entropy can be viewed as the chaos within a message. To understand why entropy is valuable in selecting an attribute over other, it is important to develop the intuition on why a certain attribute is picked.

For an attribute  $X$  such that it has 2 positive classifier and 2 negative classifier denoted by  $X_{2,2}$ , it is very difficult to make any kind of decision based on the attribute. Where considering another attribute  $Y$  such that it has 3 positive classifier and 2 negative classifier denoted by  $Y_{2,2}$ , it is possible to say that it has a higher probably to correctly capture the positive classifier. Again an attribute  $Z$  such that it has 2 positive and 3 negative classifier denoted by  $Z_{2,3}$ , it is possible to say that it has a higher probability to correctly capture the negative classifier. This probability of an outcome helps to capture the entropy of an attribute. Figure 4 provides a very good view how entropy behaves. At probability 0.5 the entropy is highest, making difficult to predict the outcome, where at probability 0 and 1 the entropy is minimum, making very easy to predict the outcome.

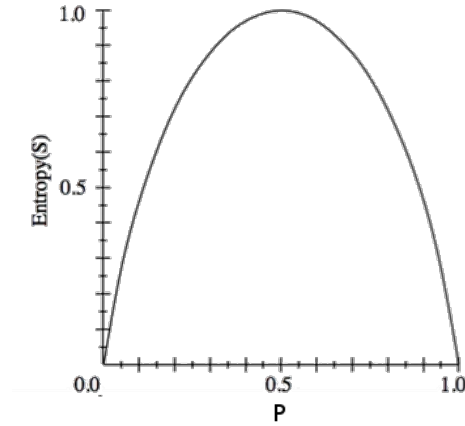


Figure 4: Relationship between entropy and probability

The equation for entropy is given by -

$$Entropy(a) = P(a) - \sum_{v \in values(C)} \log_2 P(a) \quad (2)$$

where C defines the set for classifier.

## 6.5 Decision Tree Concept: Information Gain

In decision tree, information gain means the mutual information carried by an attribute comparing to the classifier[8]. In plain english, it is generally measure of “information” of a particular value of an attribute in contrast with entropy. For example, if an attribute holds  $X, Y, Z$  values, each with different outcome. Then by contrasting each of them against the entropy of whole set, we can conclude which attribute should be the best node to pick.

The equation for information gain is given by -

$$IG(S, a) = Entropy(S) - \sum_{v \in values(a)} (|x \in S \mid x_a = v| / |T|) * Entropy(x \in S \mid x_a = v) \quad (3)$$

The goal is to pick the attribute with maximum information gain.

## 6.6 Algorithm

---

### Algorithm 5: Attribute Table Mapper

---

**input** : (row\_id, ( $a_j$ ), c)  
**output**: ( $a_j$ , (row\_id, c))  
1 **emit** ( $a_j$ , (row\_id, c))

---



---

### Algorithm 6: Attribute Table Reducer

---

**input** : ( $a_j$ , list(row\_id, c))  
**output**: ( $a_j$ , (row\_id, c, count))  
1  $count \leftarrow 0$   
2 **foreach**  $value \in list$  **do**  
3      $count \leftarrow count + 1$   
4 **emit** ( $a_j$ , (row\_id, c, count))

---



---

### Algorithm 7: Attribute Table Reducer 2

---

**input** : ( $a_j$ , list(row\_id, c, count))  
**output**: ( $a_j$ , (row\_id, c, count, all))  
1  $all \leftarrow 0$   
2 **foreach**  $value \in list$  **do**  
3      $all \leftarrow all + 1$   
4 **emit** ( $a_j$ , (row\_id, count, all))

---

---

**Algorithm 8:** Attribute Selection Mapper

---

**input** :  $(a_j, \text{list}(\text{row\_id}, c, \text{count}, \text{all}))$   
**output**:  $(a_j, (\text{InfoGain}(a_j), \text{SplitInfoGain}(a_j)))$

- 1 calc Entropy  $(a_j)$
- 2 calc InfoGain  $(a_j) = (\text{count}/\text{all}) * \text{Entropy}(a_j)$
- 3 calc SplitInfoGain  $(a_j) = -(\text{count}/\text{all}) * \log_2(\text{count}/\text{all})$
- 4 emit  $(a_j, (\text{InfoGain}(a_j), \text{SplitInfoGain}(a_j)))$

---

---

**Algorithm 9:** Attribute Selection Reducer

---

**input** :  $(a_j, (\text{InfoGain}(a_j), \text{SplitInfoGain}(a_j)))$   
**output**:  $(a_j, (\text{GainRatio}(a_j)))$

- 1  $\text{gainRatio} \leftarrow 0.0f$
- 2 **foreach**  $\text{value} \in \text{list}$  **do**
- 3      $\text{gainRatio} \leftarrow \text{gainRatio} + (\text{InfoGain}(a_j) / \text{SplitInfoGain}(a_j))$
- 4 emit  $(a_j, (\text{GainRatio}(a_j)))$

---

---

**Algorithm 10:** Attribute Selection Reducer 2

---

**input** :  $(a_j, \text{list}(\text{GainRatio}(a_j)))$   
**output**:  $(a_{\text{best}}, \text{count})$

- 1  $a_{\text{best}} \leftarrow \text{empty}$
- 2  $\text{maxGR} \leftarrow 0$
- 3 **foreach**  $(a_j, \text{GainRatio}(a_j)) \in \text{list}$  **do**
- 4     **if**  $\text{maxGR} < \text{GainRatio}(a_j)$  **then**
- 5          $\text{maxGR} \leftarrow \text{GainRatio}(a_j)$
- 6          $a_{\text{best}} \leftarrow a_j$
- 7 emit  $(a_{\text{best}}, \text{count})$

---

---

**Algorithm 11:** Tree Grow Reducer

---

**input** :  $(a_{\text{best}}, \text{row\_id})$   
**output**:  $(\text{row\_id}, (\text{node\_id}, \text{subnode\_id}))$

- 1  $\text{node\_id} \leftarrow \text{hash}(a_{\text{best}})$
- 2 **if**  $\text{node\_id}$  already seen **then**
- 3     emit  $(\text{row\_id}, \text{node\_id}, \text{empty})$
- 4 **else**
- 5      $\text{subnode\_id} \leftarrow \text{CreateSubNodeId}()$
- 6     emit  $(\text{row\_id}, \text{node\_id}, \text{subnode\_id})$

---

## 6.7 Code Snippets

---

Code Snippet 8: Attrib Table Mapper code snippet

---

```

1  protected void map(LongWritable key, Text value, Context
    context)
2      throws IOException, InterruptedException {
3      String [] values = value.toString().split("_");
4      String classifier = values[values.length - 1];
5      System.out.println(value.toString() + ",_Class:_ " +
        classifier);
6      for(int i=0; i< values.length - 1; i++) {
7          // write output as {key,value} => {attribute, (
            row_id, classifier)}
8          Text outputValue = new Text();
9          Text outputKey = new Text();
10         outputKey.set(i+1 + "_" + values[i]);
11         outputValue.set(key.toString() + "_" + classifier
            );
12         context.write(outputKey, outputValue);
13     }
14 }

```

Code Snippet 9: Attrib Table Reducer code snippet

```

1  protected void reduce(Text arg0, Iterable<Text> arg1,
    Context arg2)
2      throws IOException, InterruptedException {
3      HashMap<String, HashMap<String, Integer>>
        classifierCount = new HashMap<String, HashMap<
        String,Integer>>();
4
5      String key = arg0.toString();
6
7      for (Text text : arg1) {
8          String [] values = text.toString().split("_");
9          if (classifierCount.containsKey(key)) {
10             if (classifierCount.get(key).containsKey(
                values[1])) {
11                 classifierCount.get(key).put(values[1],
                    classifierCount.get(key).get(values
12                     [1]) + 1);
13             } else {
14                 classifierCount.get(key).put(values
                    [1], 1);
15             }
16         } else {
17             HashMap<String, Integer> val = new HashMap<
                String, Integer>();
18             val.put(values[1], 1);

```

```

19         classifierCount.put(key, val);
20     }
21 }
22
23 for (String keyAttribute : classifierCount.keySet())
24 {
25     if (classifierCount.get(keyAttribute) != null) {
26         for (String keyClass : classifierCount.get(
27             keyAttribute).keySet()) {
28             arg2.write(new Text(keyAttribute), new
29                 Text(keyClass + " " + classifierCount.
30                     get(keyAttribute).get(keyClass)));
31         }
32     }
33 }
34 }
35 }

```

Code Snippet 10: Attrib Table Reducer 2 code snippet

```

1 protected void reduce(Text arg0, Iterable<Text> arg1,
2     Context arg2)
3     throws IOException, InterruptedException {
4     long total = 0;
5     LinkedList<String> set = new LinkedList<String>();
6
7     for (Text text : arg1) {
8         StringTokenizer tok = new StringTokenizer(text.
9             toString());
10        set.add(text.toString());
11        String [] values = new String[tok.countTokens()];
12        int i = 0;
13        while(tok.hasMoreTokens()) {
14            values[i++] = tok.nextToken().trim();
15        }
16
17        total += Long.parseLong(values[2]);
18    }
19
20    for (String text : set) {
21        StringTokenizer tok = new StringTokenizer(text);
22        String [] values = new String[tok.countTokens()];
23        int i = 0;
24        while(tok.hasMoreTokens()) {
25            values[i++] = tok.nextToken().trim();
26        }
27        Text outputKey = new Text(arg0 + " " + values[0])

```

```

27         ;
        Text outputValue = new Text(values[1] + "␣" +
28         values[2] + "␣" + String.valueOf(total));
        arg2.write(outputKey, outputValue);
29     }
30 }

```

Code Snippet 11: Attrib Selection Mapper code snippet

```

1  float calculateEntropy(String attribute, int cnt, int
    totalCount) {
2      float result = 0.0f;
3      float probability = ((float)cnt)/((float)totalCount);
4      float log2Prob = (float) (Math.log10(probability) /
        Math.log10(2));
5      return probability + log2Prob;
6  }
7
8  @Override
9  protected void map(LongWritable key, Text value, Context
    context)
10     throws IOException, InterruptedException {
11      StringTokenizer tok = new StringTokenizer(value.
        toString());
12      String [] tokens = new String[tok.countTokens()];
13      int i = 0;
14      while(tok.hasMoreTokens()) {
15          tokens[i++] = tok.nextToken().trim();
16      }
17      String strKey = tokens[0] + "␣" + tokens[1];
18      String classifier = tokens[2];
19      int cnt = Integer.parseInt(tokens[3]);
20      int totalCnt = Integer.parseInt(tokens[4]);
21      float entropy = calculateEntropy(strKey, cnt,
        totalCnt);
22      float probability = ((float)cnt)/((float)totalCnt);
23      float infoAttribute = probability * entropy;
24      float splitInfoAttribute = (float) (probability * (
        Math.log10(probability) / Math.log10(2)) * -1.0f);
25
26      Text outputValue = new Text();
27      outputValue.set(tokens[1] + "␣" + tokens[2] + "␣" +
        tokens[3] + "␣" + tokens[4] + "␣" + String.valueOf
        (entropy) + "␣" + String.valueOf(infoAttribute) +
        "␣" + String.valueOf(splitInfoAttribute));
28      context.write(new Text(tokens[0]), outputValue);

```

29 }  
}

Code Snippet 12: Attrib Selection Reducer code snippet

```
1  protected void reduce(Text arg0, Iterable<Text> arg1,
   Context arg2)
2  throws IOException, InterruptedException {
3      LinkedList<String> items = new LinkedList<String>();
4      for(Text t : arg1) {
5          items.add(t.toString());
6      }
7
8      float gainRatio = 0.0f;
9
10     for(String it : items) {
11         StringTokenizer strTok = new StringTokenizer(it);
12         String [] values = new String[strTok.countTokens()];
13         int i = 0;
14         while(strTok.hasMoreTokens()) {
15             values[i++] = strTok.nextToken().trim();
16         }
17         float entropy = Float.parseFloat(values[4]);
18         float gain = entropy - Float.parseFloat(values[5]);
19         gainRatio += gain / Float.parseFloat(values[6]);
20     }
21     arg2.write(arg0, new Text(String.valueOf(gainRatio)))
22     ;
23 }
```

Code Snippet 13: Attrib Selection Reducer 2 code snippet

```
1  protected void reduce(Text arg0, Iterable<Text> arg1,
   Context arg2)
2  throws IOException, InterruptedException {
3      LinkedList<String> items = new LinkedList<String>();
4      for(Text t : arg1) {
5          items.add(t.toString());
6      }
7
8      String aBest = "";
9      float mGain = 0.0f;
10     int mCount = 0;
11
12     for(String it : items) {
```

```

13     StringTokenizer strTok = new StringTokenizer(it);
14     String [] values = new String[strTok.countTokens
        ()];
15     int i = 0;
16     while(strTok.hasMoreTokens()) {
17         values[i++] = strTok.nextToken().trim();
18     }
19     float gainRatio = Float.parseFloat(values[2]);
20     if (mGain < gainRatio) {
21         mGain = gainRatio;
22         aBest = values[0];
23         mCount = Integer.parseInt(values[1]);
24     }
25 }
26 arg2.write(new Text(aBest), new Text(String.valueOf(
    mCount)));
27 }

```

## 6.8 Analysis

## 6.9 Conclusion

## References

- [1] [https://en.wikipedia.org/wiki/Decision\\_tree](https://en.wikipedia.org/wiki/Decision_tree)
- [2] <https://www.ibm.com/developerworks/library/bd-hadoopyarn/>
- [3] Mu, Y., Liu, X., Yang, Z., & Liu, X. (2017). A parallel C4. 5 decision tree algorithm based on MapReduce. *Concurrency and Computation: Practice and Experience*.
- [4] Wei Dai, Wei Ji. A MapReduce Implementation of C4.5 Decision Tree Algorithm.
- [5] Prayag Surrendran, Redappa G Naidu, Dinesh R. Implementation of C4.5 Algorithm Using Hadoop MapReduce Framework.
- [6] Apache Hadoop. <http://hadoop.apache.org/>
- [7] Entropy. [https://en.wikipedia.org/wiki/Entropy\\_information\\_theory](https://en.wikipedia.org/wiki/Entropy_information_theory)
- [8] Information Gain. [https://en.wikipedia.org/wiki/Information\\_gain\\_in\\_decision\\_trees](https://en.wikipedia.org/wiki/Information_gain_in_decision_trees)  
<http://codingwiththomas.blogspot.ca/2011/04/controlling-hadoop-job-recursion.html>