

TASK #51636:

Q.

- i. Install Apache Web Server**
- ii. Create an index.html page in default document root**
- iii. Access the website using mysamplewebsite.itfs**

SOLUTION:

1. Connect to server

```
#ssh -i "awskey.pem" ec2-user@ec2-15-252-182-177.ap-south-1.compute.amazonaws.com
```

Log into your remote RHEL server from Git Bash.

2. Install Apache

```
#sudo yum install httpd -y
```

Installs the Apache web server.

```
#sudo systemctl start httpd
```

Starts Apache immediately.

```
#sudo systemctl enable httpd
```

Makes Apache auto-start on every server reboot.

3. Create the index.html file

```
#sudo vi /var/www/html/index.html
```

edits your homepage file.

Press I and add `<h1> MY NAME IS FADHIL</h1>`

First web page is ready now create new html and configuration file

4. Create website folders

```
#sudo mkdir -p /var/www/site2.com/html
```

Creates the folder that will hold the second website's files.

5. Create test webpage

```
#Sudo vi /var/www/site2.com/html/index.html
```

Creates a simple HTML file to serve as the homepage.

6. Fix ownership

```
#sudo chown -R $USER:$USER /var/www/site2.com/html
```

Makes your user the owner of the folder so you can edit files without sudo.

7. Create the virtual host config file

```
#sudo nano /etc/httpd/conf.d/vhost.conf
```

Opens (creates) a new config file for defining virtual hosts.

Press I and enter

```
<VirtualHost *:80>

    ServerName fadhil.ipsr

    DocumentRoot /var/www/html

    ErrorLog /var/log/httpd/mysite_error.log

    CustomLog /var/log/httpd/mysite_access.log combined
</VirtualHost>

<VirtualHost *:80>

    ServerName favas.co

    DocumentRoot /var/www/site2.com/html

    ErrorLog /var/log/httpd/site2_error.log

    CustomLog /var/log/httpd/site2_access.log combined
</VirtualHost>
```

8. Restart Apache

```
#sudo systemctl restart httpd
```

Reloads Apache with the new virtual host settings.

9. Fix SELinux labelling

```
#sudo chcon -R -t httpd_sys_content_t /var/www/site2.com/html
```

Allows Apache to read files under SELinux policy (temporary).

10. Open Notepad as Administrator

This is required — the hosts file is protected and won't save otherwise.

Search "Notepad" in the Start menu

Right-click it → **Run as administrator**

11. Open the hosts file

Inside Notepad:

```
Open C:\Windows\System32\drivers\etc\
```

Select the file named **hosts** and open it

3. Add your fake domain mapping

At the bottom of the file, add a new line:

```
15.252.182.177 fadhil.ipsr
```

```
15.252.182.177 favas.co
```

In simple words: this tells your Windows PC — "whenever I type favas.co in a browser, don't ask the internet, just go directly to this IP address."

Trouble shooting commands :

```
#sudo httpd -S
```


Shows a **summary of all VirtualHosts** Apache has loaded — which domains are configured, which config file/line they came from, and which one is set as the **default server**. Use this to check if your virtual hosting setup is correct.

```
#sudo httpd -t
```

Tests the configuration file for syntax errors without actually restarting Apache

OUTPUTS:

Domain name :fadhil.ipsr

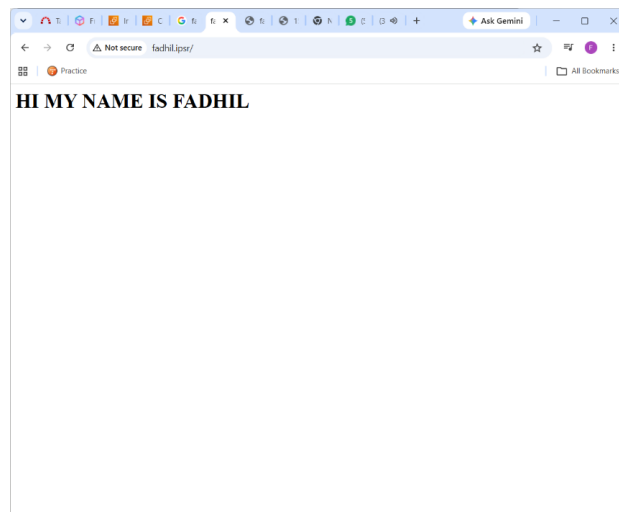

Domain name :favas.co

