




[DOCUMENT TITLE]

[Document subtitle]

LAB:2
DATABASE SYSTEM
NAME: FAHMIDA
SAPID_ 5000000393
DEPARTMENT: MMG

1. Employees earning more than \$12,000.

Input:

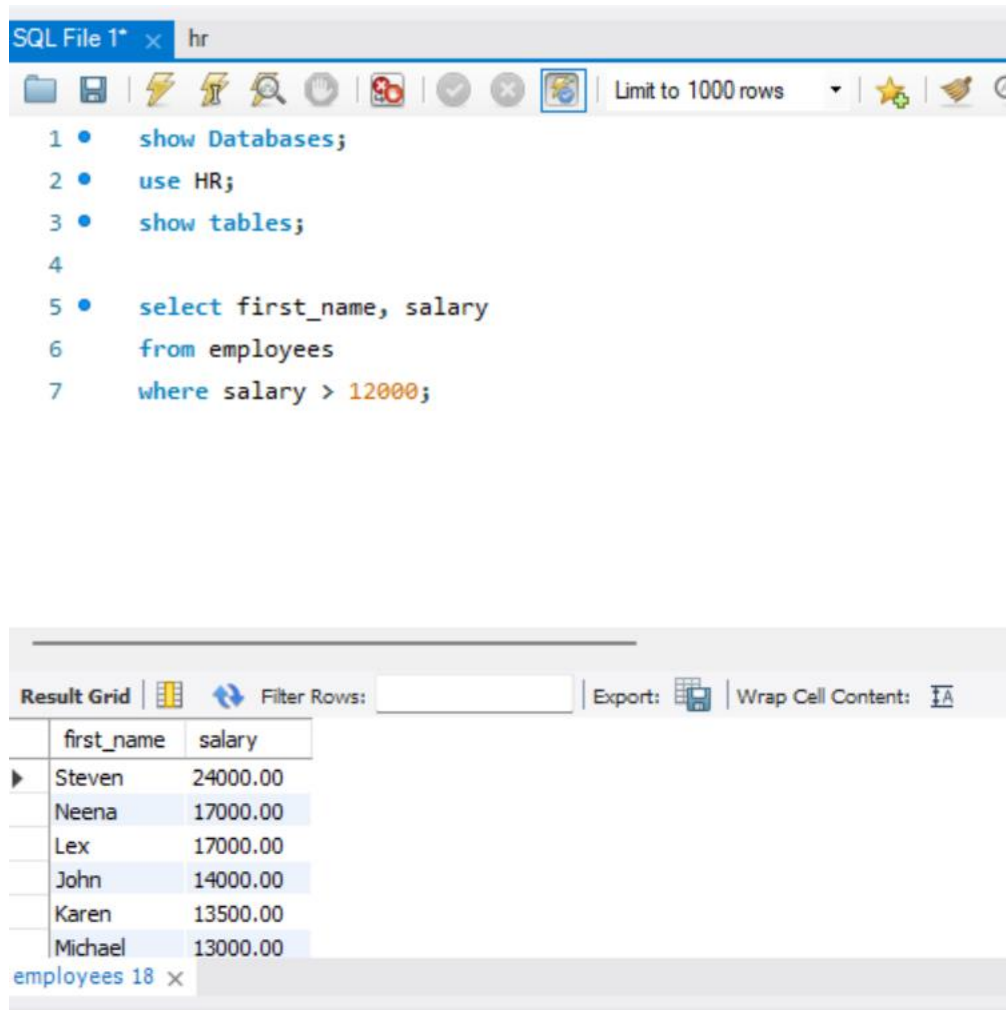

The screenshot shows a SQL IDE interface. The top panel displays a query file named 'hr' with the following SQL code:


```
1 • show Databases;  
2 • use HR;  
3 • show tables;  
4  
5 • select first_name, salary  
6   from employees  
7   where salary > 12000;
```

The bottom panel shows the 'Result Grid' with the following data:

	first_name	salary
▶	Steven	24000.00
	Neena	17000.00
	Lex	17000.00
	John	14000.00
	Karen	13500.00
	Michael	13000.00

Below the table, it says 'employees 18' with a close button.

2. Employee whose employee number is 176.

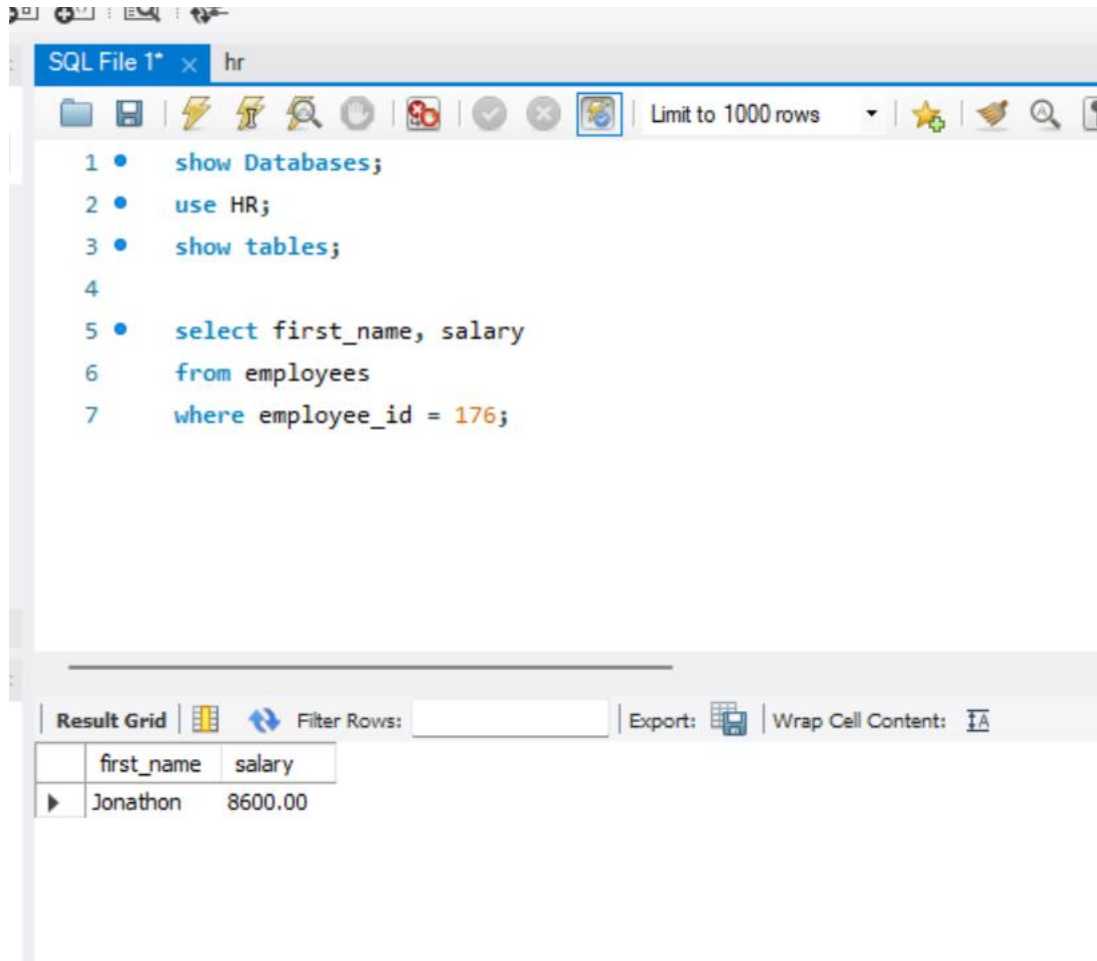

The screenshot shows a SQL IDE window titled "SQL File 1* x hr". The query editor contains the following SQL code:


```
1 • show Databases;  
2 • use HR;  
3 • show tables;  
4  
5 • select first_name, salary  
6   from employees  
7   where employee_id = 176;
```

The result grid at the bottom displays the following data:

	first_name	salary
▶	Jonathon	8600.00

The IDE interface includes a toolbar with various icons for file operations, execution, and navigation. A "Limit to 1000 rows" dropdown is visible in the toolbar. The result grid also has options for "Filter Rows", "Export", and "Wrap Cell Content".

3. Salary not in the range \$5,000–\$12,000.

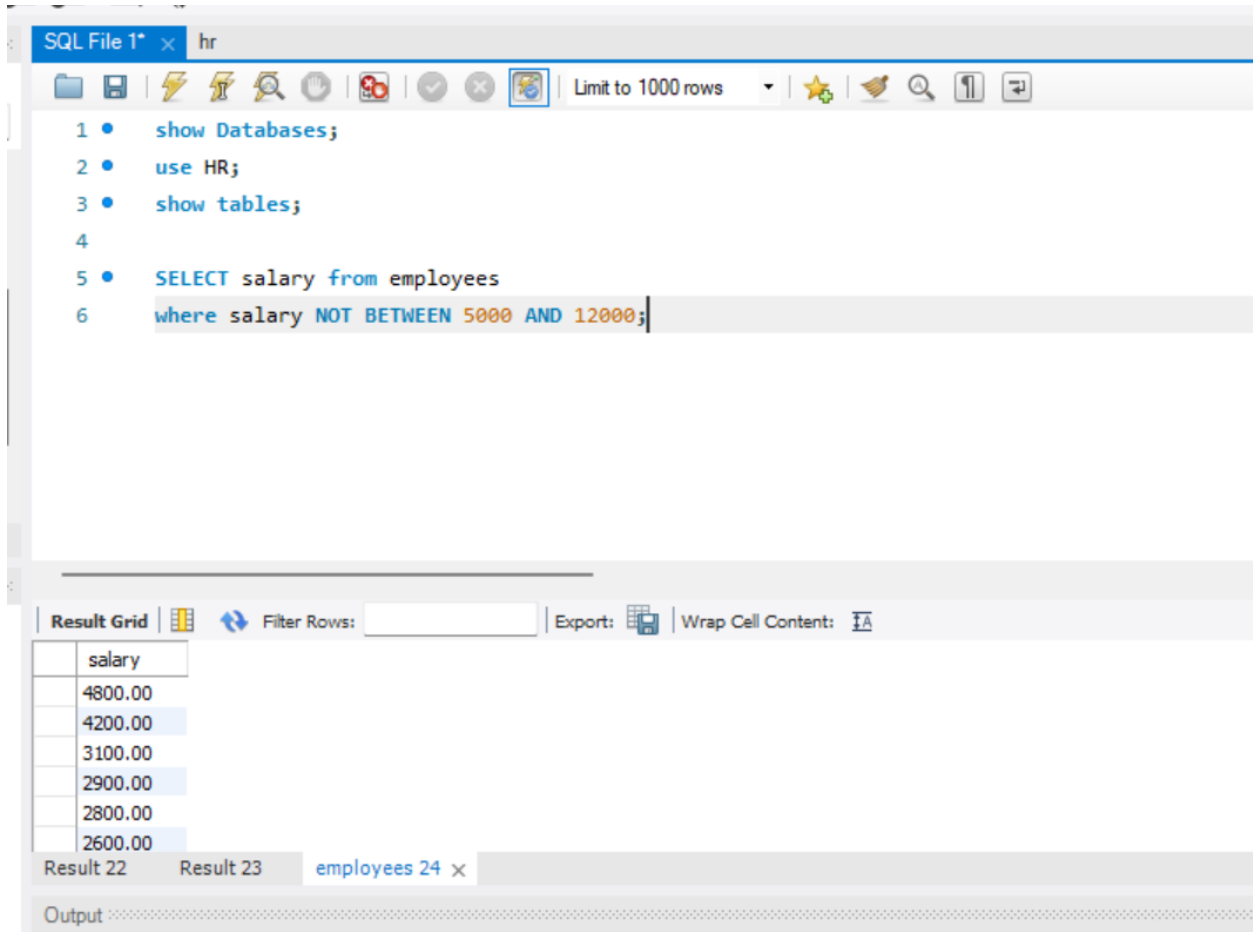

The screenshot shows a SQL IDE interface. The top toolbar includes icons for file operations, execution, and a 'Limit to 1000 rows' dropdown. The SQL editor contains the following code:


```
1 • show Databases;  
2 • use HR;  
3 • show tables;  
4  
5 • SELECT salary from employees  
6 where salary NOT BETWEEN 5000 AND 12000;
```

Below the editor, the 'Result Grid' tab is active, displaying a table with the following data:

salary
4800.00
4200.00
3100.00
2900.00
2800.00
2600.00

The bottom of the interface shows tabs for 'Result 22', 'Result 23', and 'employees 24 x', along with an 'Output' pane.

4. Employees in departments 10, 20, 30, 50

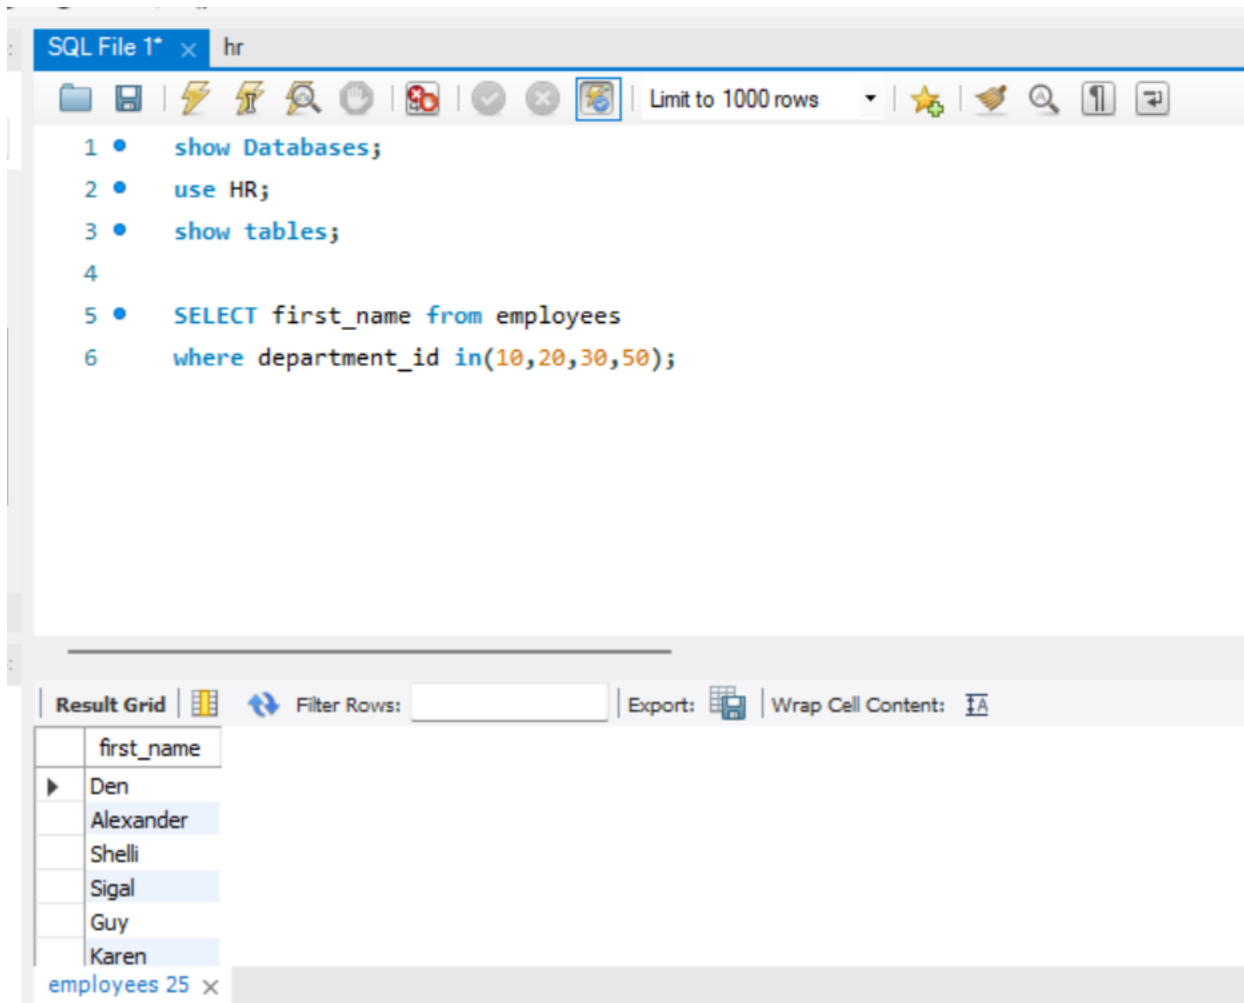

The screenshot shows a SQL IDE window titled "SQL File 1* x hr". The query editor contains the following SQL code:


```
1 • show Databases;  
2 • use HR;  
3 • show tables;  
4  
5 • SELECT first_name from employees  
6   where department_id in(10,20,30,50);
```

The results pane at the bottom shows a table with the following data:

first_name
Den
Alexander
Shelli
Sigal
Guy
Karen

The results pane also includes a "Result Grid" tab, a "Filter Rows:" input field, an "Export:" button, and a "Wrap Cell Content:" checkbox. The status bar at the bottom indicates "employees 25 x".

5. Employees not in departments 10, 20, 30, 50

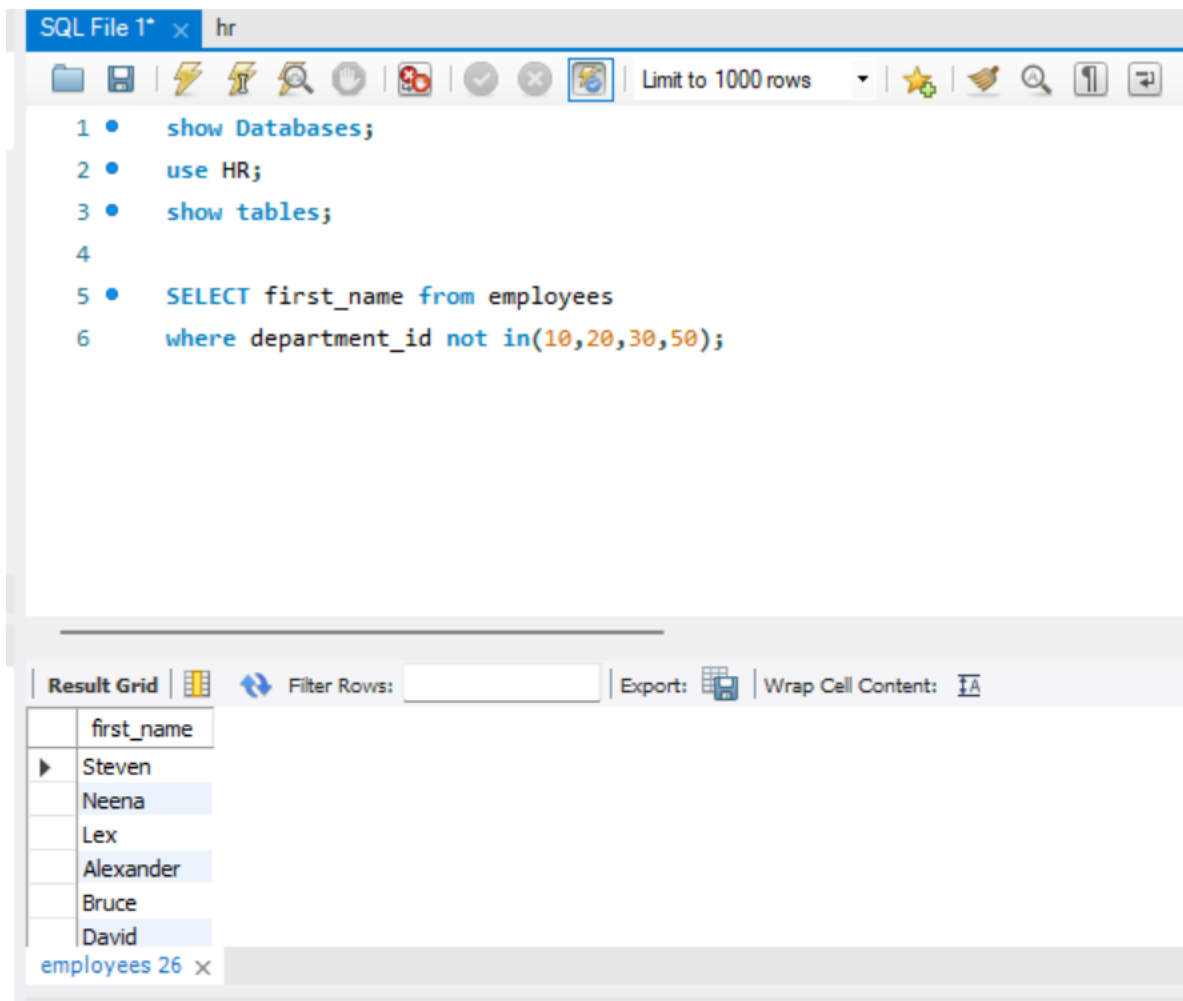

The screenshot shows the SQL Developer interface. The top toolbar includes icons for file operations, execution, and navigation. The query editor contains the following SQL code:


```
1 • show Databases;  
2 • use HR;  
3 • show tables;  
4  
5 • SELECT first_name from employees  
6   where department_id not in(10,20,30,50);
```

Below the query editor is the 'Result Grid' section. It includes a 'Filter Rows' input field, an 'Export' button, and a 'Wrap Cell Content' checkbox. The results are displayed in a table with one column, 'first_name'.

first_name
Steven
Neena
Lex
Alexander
Bruce
David

At the bottom of the results grid, it indicates 'employees 26' rows.

6. Salary \$5,000–\$12,000 and in department 20 or 50
(with labels)

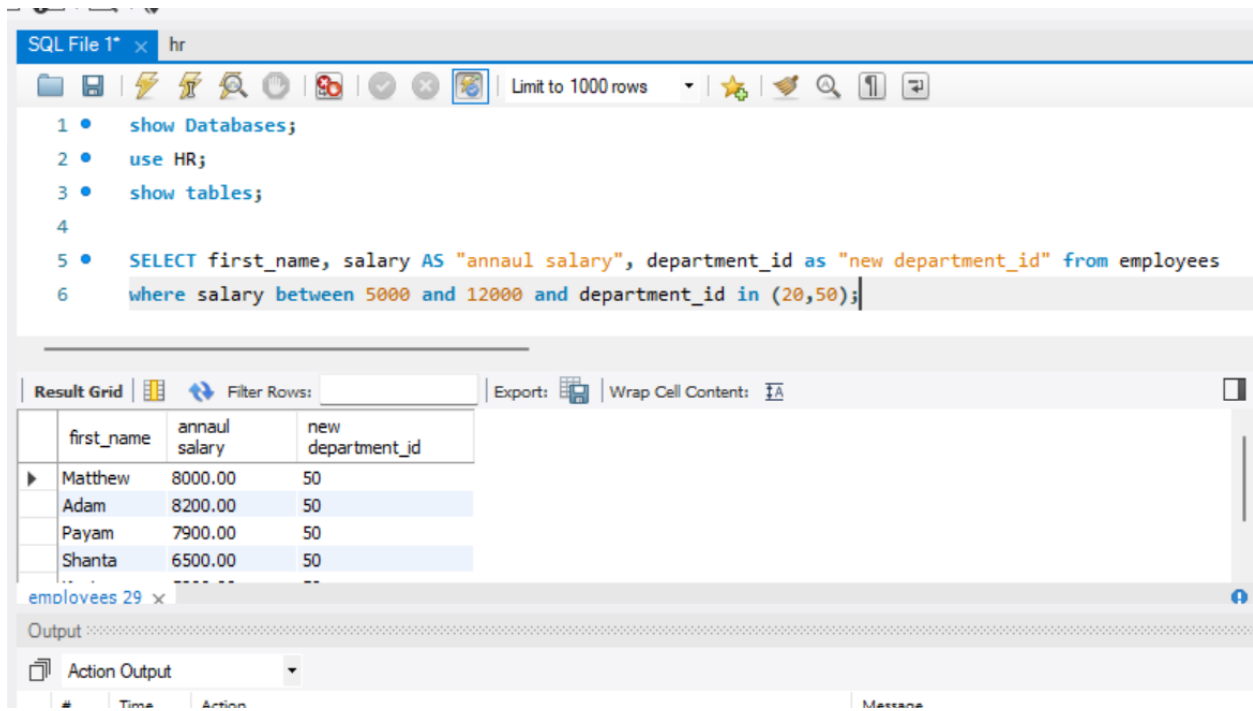

The screenshot shows the SQL Developer interface with a query window titled 'SQL File 1*' containing the following SQL code:


```
1 • show Databases;
2 • use HR;
3 • show tables;
4
5 • SELECT first_name, salary AS "annaul salary", department_id as "new department_id" from employees
6   where salary between 5000 and 12000 and department_id in (20,50);
```

Below the query window, the 'Result Grid' displays the results of the query. The grid has four columns: 'first_name', 'annaul salary', and 'new department_id'. The results show four employees: Matthew (8000.00, 50), Adam (8200.00, 50), Payam (7900.00, 50), and Shanta (6500.00, 50). The total number of rows is 29.

first_name	annaul salary	new department_id
Matthew	8000.00	50
Adam	8200.00	50
Payam	7900.00	50
Shanta	6500.00	50
...	...	...

The 'Output' window at the bottom shows 'Action Output'.

7. Third letter of last name is 'a' or 'A'

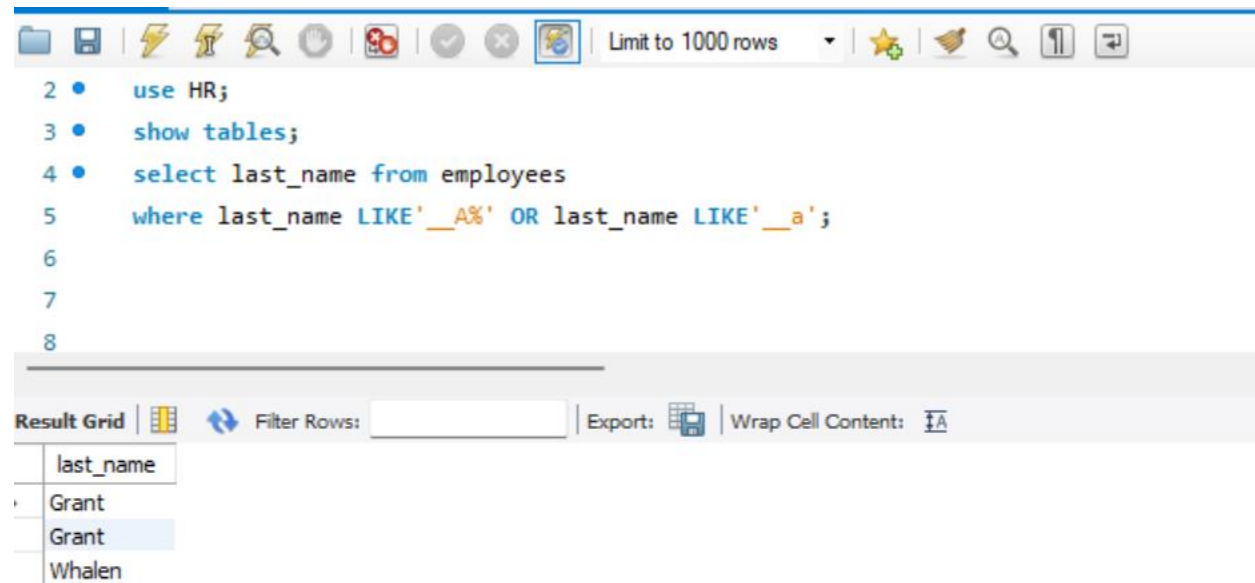


The screenshot shows a SQL IDE interface. The top toolbar includes icons for file operations, execution, and a 'Limit to 1000 rows' dropdown. The SQL editor contains the following code:

```
2 • use HR;
3 • show tables;
4 • select last_name from employees
5   where last_name LIKE '__A%' OR last_name LIKE '__a';
6
7
8
```

Below the editor is the 'Result Grid' section. It features a 'Filter Rows' input field, an 'Export' button, and a 'Wrap Cell Content' checkbox. The results are displayed in a table with the following data:

last_name
Grant
Grant
Whalen

8. Last names containing both 'a/A' and 'e/E'

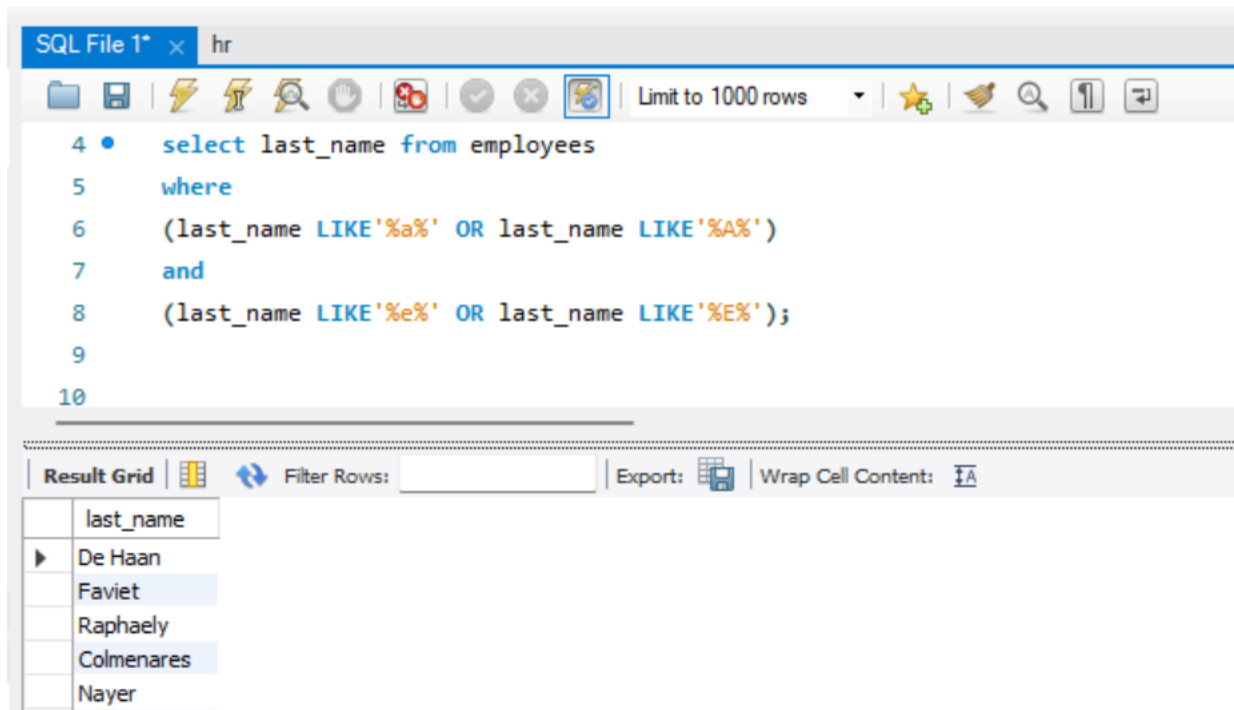

The screenshot shows an SQL IDE window titled "SQL File 1* x hr". The query editor contains the following SQL code:

```
4 • select last_name from employees
5 where
6 (last_name LIKE '%a%' OR last_name LIKE '%A%')
7 and
8 (last_name LIKE '%e%' OR last_name LIKE '%E%');
9
10
```


Below the query editor is the "Result Grid" section. It includes a "Filter Rows:" input field, an "Export:" button, and a "Wrap Cell Content:" checkbox. The results are displayed in a table with the following data:

	last_name
▶	De Haan
	Faviet
	Raphaely
	Colmenares
	Nayer

9. Employees who do not have a manager.

[illegible]

10. Commission amount is 20%

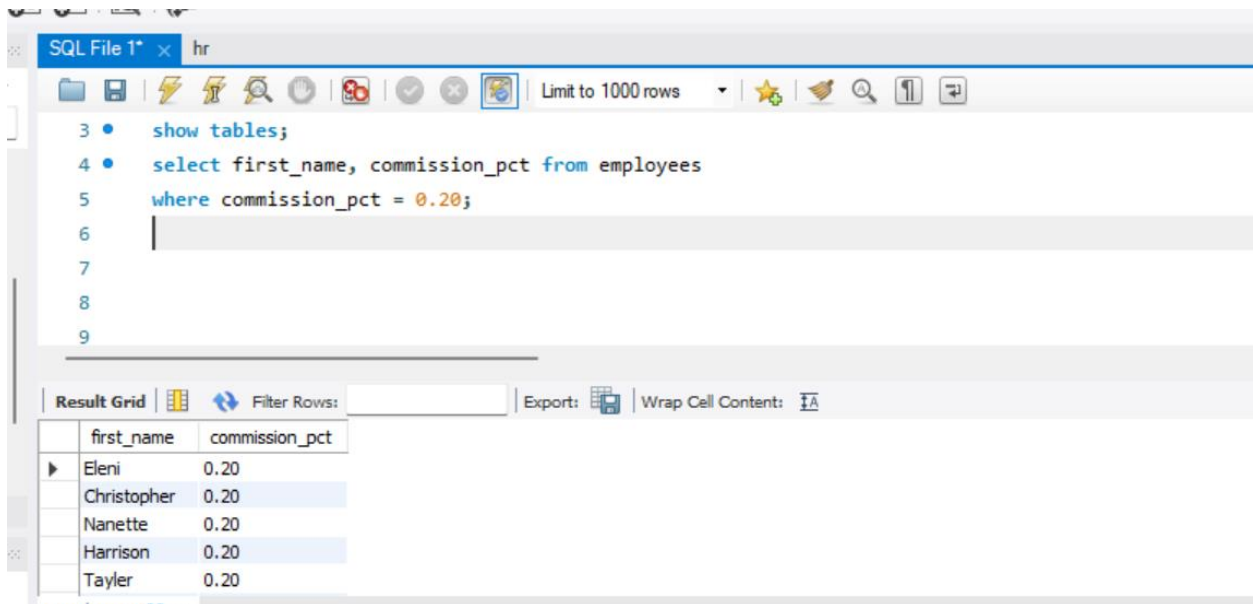


The screenshot shows a SQL IDE window titled "SQL File 1* x hr". The query editor contains the following SQL code:

```
3 • show tables;
4 • select first_name, commission_pct from employees
5   where commission_pct = 0.20;
6
7
8
9
```

Below the query editor is the "Result Grid" section. It includes a "Filter Rows:" input field, an "Export:" button, and a "Wrap Cell Content:" checkbox. The results are displayed in a table with two columns: "first_name" and "commission_pct".

first_name	commission_pct
Eleni	0.20
Christopher	0.20
Nanette	0.20
Harrison	0.20
Tayler	0.20

11. Department number, full name, salary (dept ↑, salary ↓)

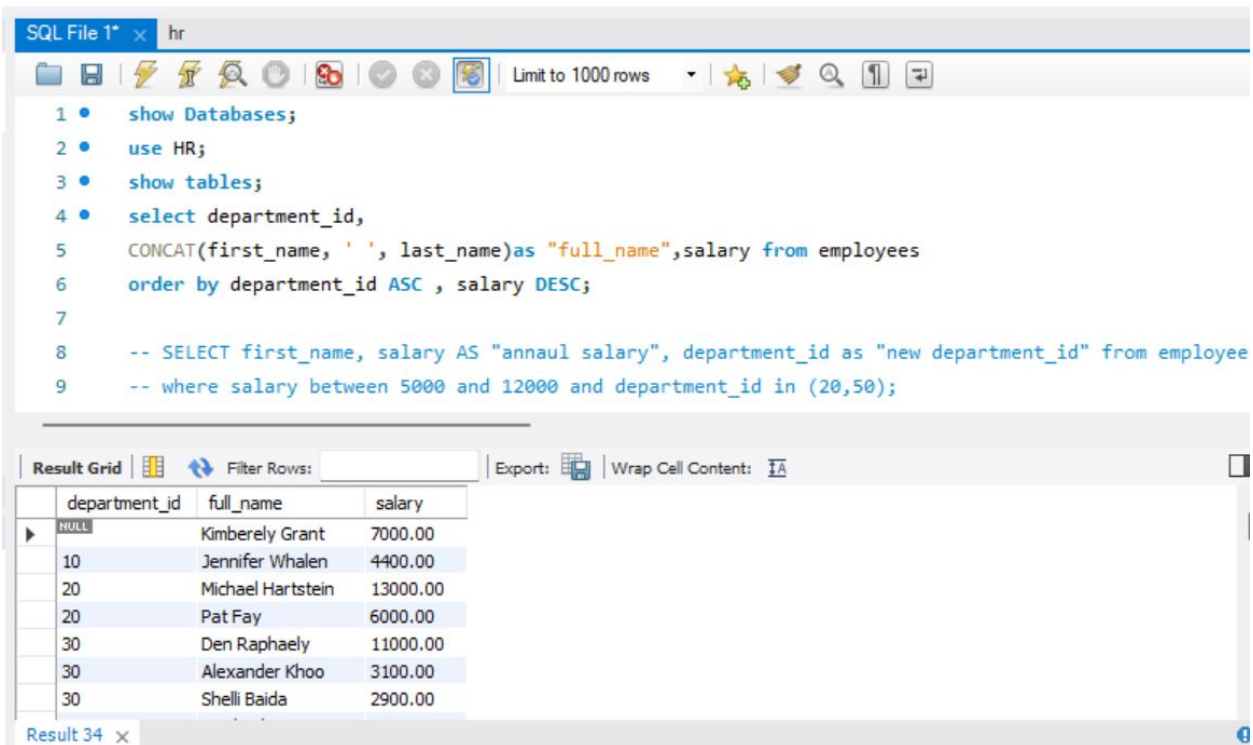

The screenshot shows a SQL IDE window titled "SQL File 1* x hr". The query editor contains the following SQL code:

```
1 • show Databases;
2 • use HR;
3 • show tables;
4 • select department_id,
5   CONCAT(first_name, ' ', last_name) as "full_name", salary from employees
6   order by department_id ASC , salary DESC;
7
8   -- SELECT first_name, salary AS "annaul salary", department_id as "new department_id" from employee
9   -- where salary between 5000 and 12000 and department_id in (20,50);
```

Below the query editor is the "Result Grid" tab, which displays the results of the query. The grid has four columns: "department_id", "full_name", and "salary". The first row is highlighted with a blue background and shows a NULL value for "department_id", "Kimberely Grant" for "full_name", and "7000.00" for "salary". The subsequent rows show employees grouped by department ID, ordered by salary in descending order within each group.

department_id	full_name	salary
NULL	Kimberely Grant	7000.00
10	Jennifer Whalen	4400.00
20	Michael Hartstein	13000.00
20	Pat Fay	6000.00
30	Den Raphaely	11000.00
30	Alexander Khoo	3100.00
30	Shelli Baida	2900.00

At the bottom of the window, there is a tab labeled "Result 34 x" and a small blue icon on the right.