Lab 3

Working with Git History, Stashing, and Reverting Commits

Course: CS-649 Cloud DevOps

Student: Yusra Faisal (GitHub: faisal-yusra)

Submission repository: https://github.com/faisal-yusra/DevOps (Labs/Lab03)

Practice repository: https://github.com/faisal-yusra/DevOps_Lab3_Practice

Live site (Task 11): https://faisal-yusra.github.io/

Notes

- Tasks 1-9 were run in the practice repository DevOps_Lab3_Practice so that rewriting history could not affect the submission repository.
- Task 10: the forked Gitea repository no longer has a codespace branch and the Gitea Codespace has no Docker, so the same Gitea setup (compose.yaml, included) was run from a Codespace on the practice repository.

Task 1 - Handling Local and Remote Commit Conflicts (Pull vs Pull --rebase)


A commit was made on GitHub and a different one locally, so the first push was rejected. The conflict was resolved once with git pull --no-rebase (merge commit) and once with git pull --rebase (linear history).

Commands


```
git push origin main
git pull --no-rebase origin main
git push -u origin main
git pull --rebase origin main
git push -u origin main
```

Screenshots


remote_edit.png - Remote edit committed on GitHub

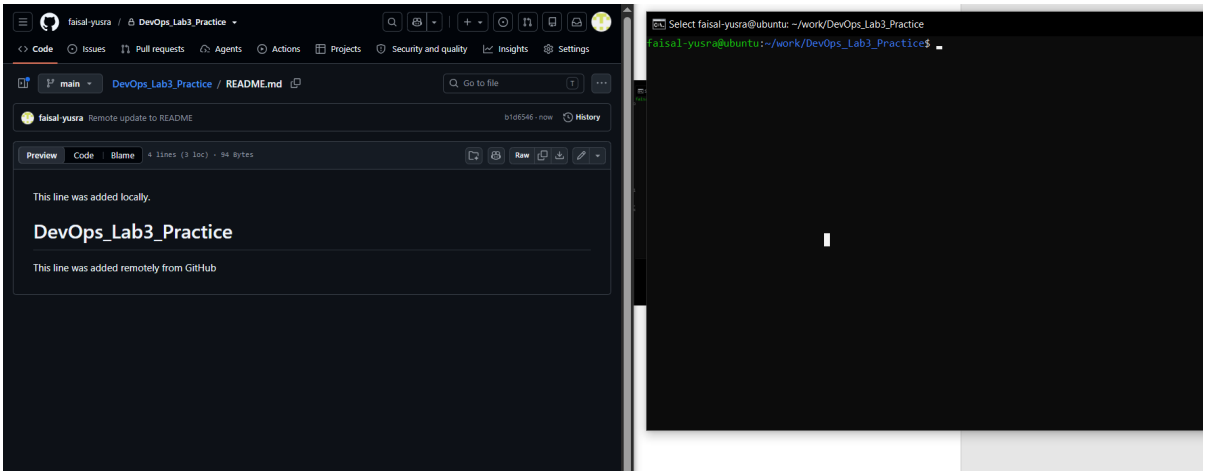

local_commit.png - Local commit before pushing

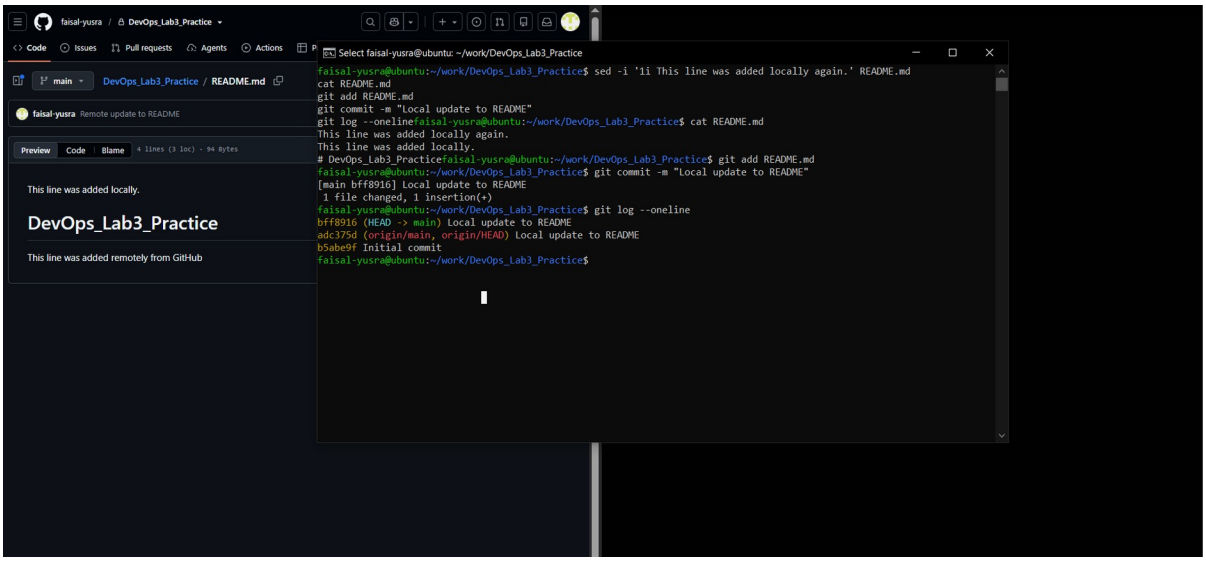

push_error.png - Push rejected (remote has new work)

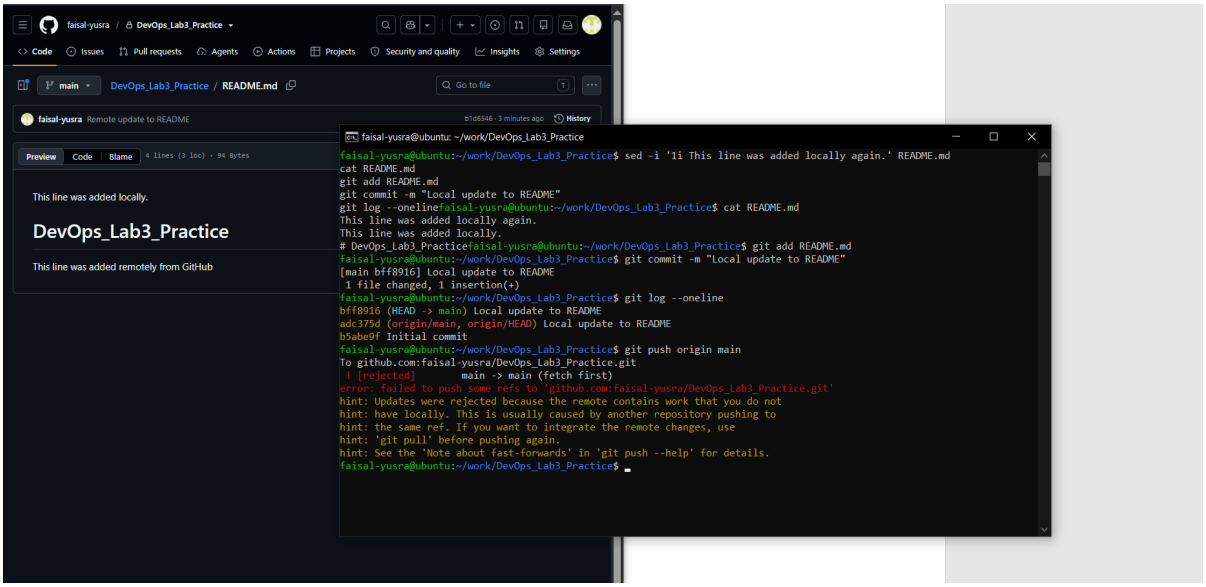


merge_commit.png - git pull --no-rebase creates a merge commit

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git pull --no-rebase origin main
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 978 bytes | 978.00 KiB/s, done.
From github.com:faisal-yusra/DevOps_Lab3_Practice
 * branch            main       -> FETCH_HEAD
   adc375d..b1d6546  main       -> origin/main
Auto-merging README.md
Merge made by the 'ort' strategy.
 README.md | 4 +++-
 1 file changed, 3 insertions(+), 1 deletion(-)
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git log --oneline --graph
*   7452a22 (HEAD -> main) Merge branch 'main' of github.com:faisal-yusra/DevOps_Lab3_Practice
|\
| * b1d6546 (origin/main, origin/HEAD) Remote update to README
* | bff8916 Local update to README
|/
* adc375d Local update to README
* b5abe9f Initial commit
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ at README.md
Command 'at' not found, but can be installed with:
sudo apt install at
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ cat README.md
This line was added locally again.
This line was added locally.
# DevOps_Lab3_Practice

This line was added remotely from GitHub
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git push -u origin main
Enumerating objects: 10, done.
Counting objects: 100% (10/10), done.
Delta compression using up to 2 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (6/6), 600 bytes | 300.00 KiB/s, done.
Total 6 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To github.com:faisal-yusra/DevOps_Lab3_Practice.git
   b1d6546..7452a22  main -> main
branch 'main' set up to track 'origin/main'.
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

push_after_merge.png - Push after the merge

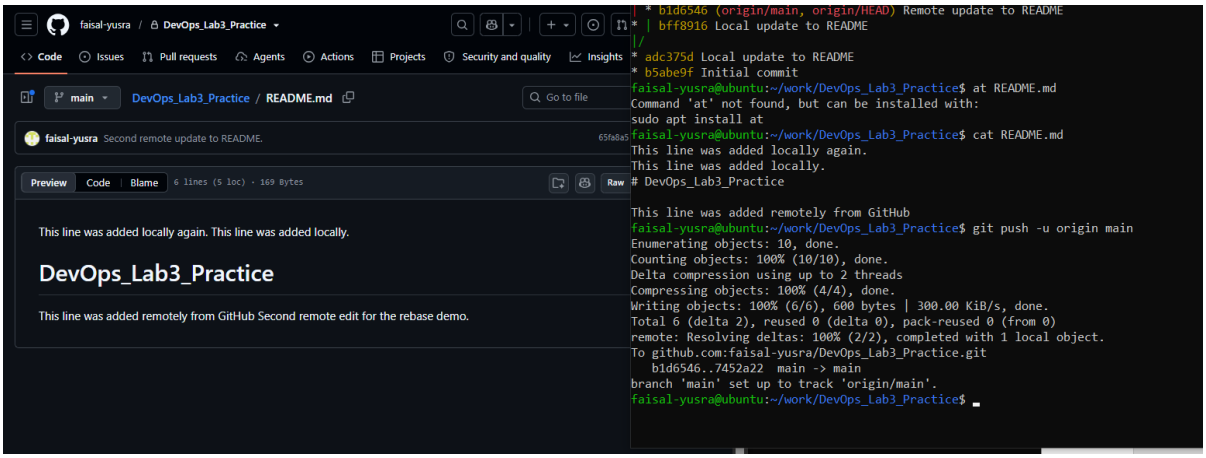

rebase_pull.png - git pull --rebase replays the local commit (linear history)

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git pull --rebase origin main
ADME.md
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 968 bytes | 121.00 KiB/s, done.
From github.com:faisal-yusra/DevOps_Lab3_Practice
 * branch            main       -> FETCH_HEAD
   7452a22..65fa8a5  main       -> origin/main
Successfully rebased and updated refs/heads/main.
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git log --oneline --graph
* b5e608a (HEAD -> main) Second local update to README
* 65fa8a5 (origin/main, origin/HEAD) Second remote update to README
*   7452a22 Merge branch 'main' of github.com:faisal-yusra/DevOps_Lab3_Practice
|\
| * b1d6546 Remote update to README
* | bff8916 Local update to README
|/
* adc375d Local update to README
* b5abe9f Initial commit
```

push_after_rebase.png - Push after the rebase

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git push -u origin main
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 322 bytes | 322.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:faisal-yusra/DevOps_Lab3_Practice.git
   65fa8a5..b5e608a  main -> main
branch 'main' set up to track 'origin/main'.
```

Task 2 - Creating and Resolving Merge Conflicts Manually


The same line was changed on GitHub and locally. git pull --rebase stopped with a conflict, which was resolved by hand, then the rebase was continued and pushed.

Commands


```
git push -u origin main
git pull --rebase origin main
# edit README.md, remove conflict markers
git add README.md
git rebase --continue
git push -u origin main
```

Screenshots

remote_conflict_edit.png - Conflicting change on GitHub

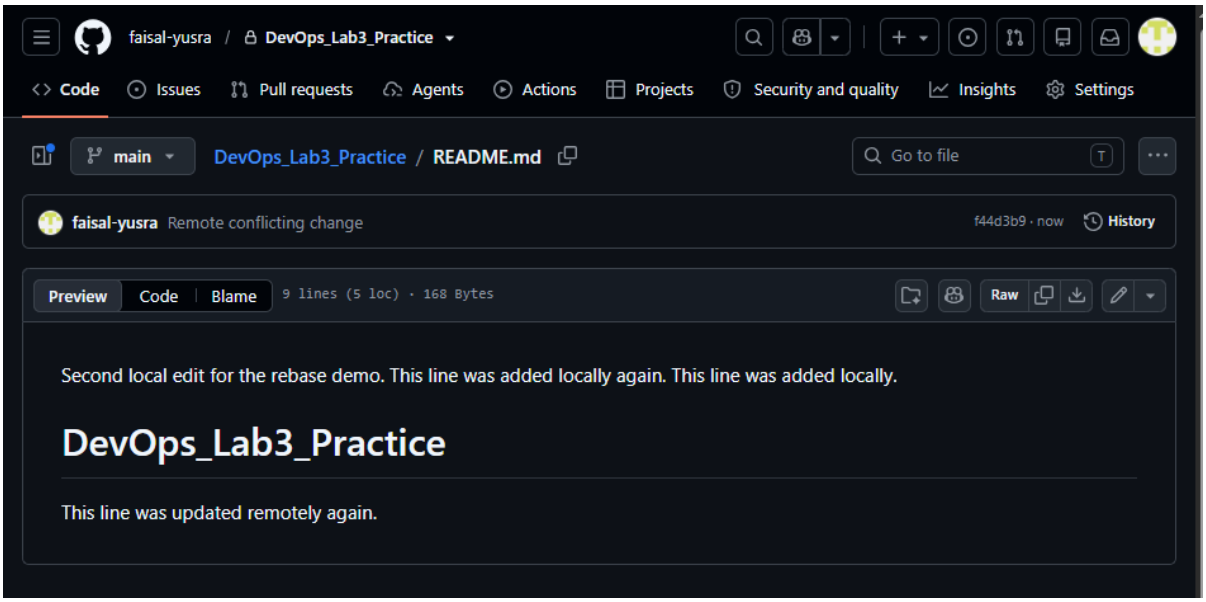


local_conflict_edit.png - Conflicting change made locally (same line)

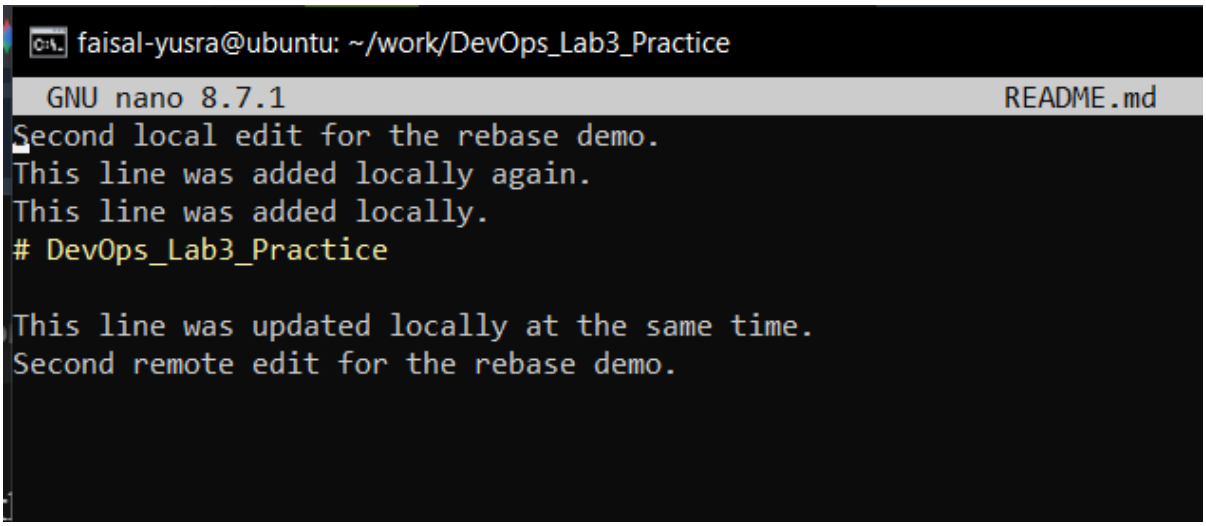

local_conflict_commit.png - Local conflicting commit

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git log --oneline
e5ef71e (HEAD -> main) Local conflicting change
b5e608a Second local update to README
65fa8a5 Second remote update to README.
7452a22 Merge branch 'main' of github.com:faisal-yusra/DevOps_Lab3_Practice
bff8916 Local update to README
b1d6546 Remote update to README
adc375d Local update to README
b5abe9f Initial commit
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```


conflict_push_error.png - Push rejected

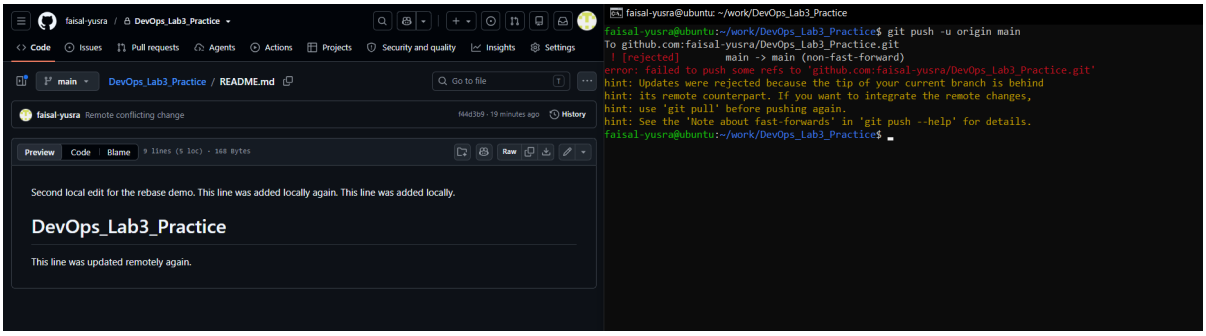


conflict_message.png - Rebase stops with a CONFLICT message

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git pull --rebase origin main
From github.com:faisal-yusra/DevOps_Lab3_Practice
 * branch            main       -> FETCH_HEAD
Auto-merging README.md
CONFLICT (content): Merge conflict in README.md
error: could not apply e5ef71e... Local conflicting change
hint: Resolve all conflicts manually, mark them as resolved with
hint: "git add/rm <conflicted_files>", then run "git rebase --continue".
hint: You can instead skip this commit: run "git rebase --skip".
hint: To abort and get back to the state before "git rebase", run "git rebase --abort".
hint: Disable this message with "git config set advice.mergeConflict false"
Could not apply e5ef71e... # Local conflicting change
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```


resolved_readme.png - README.md after resolving the conflict

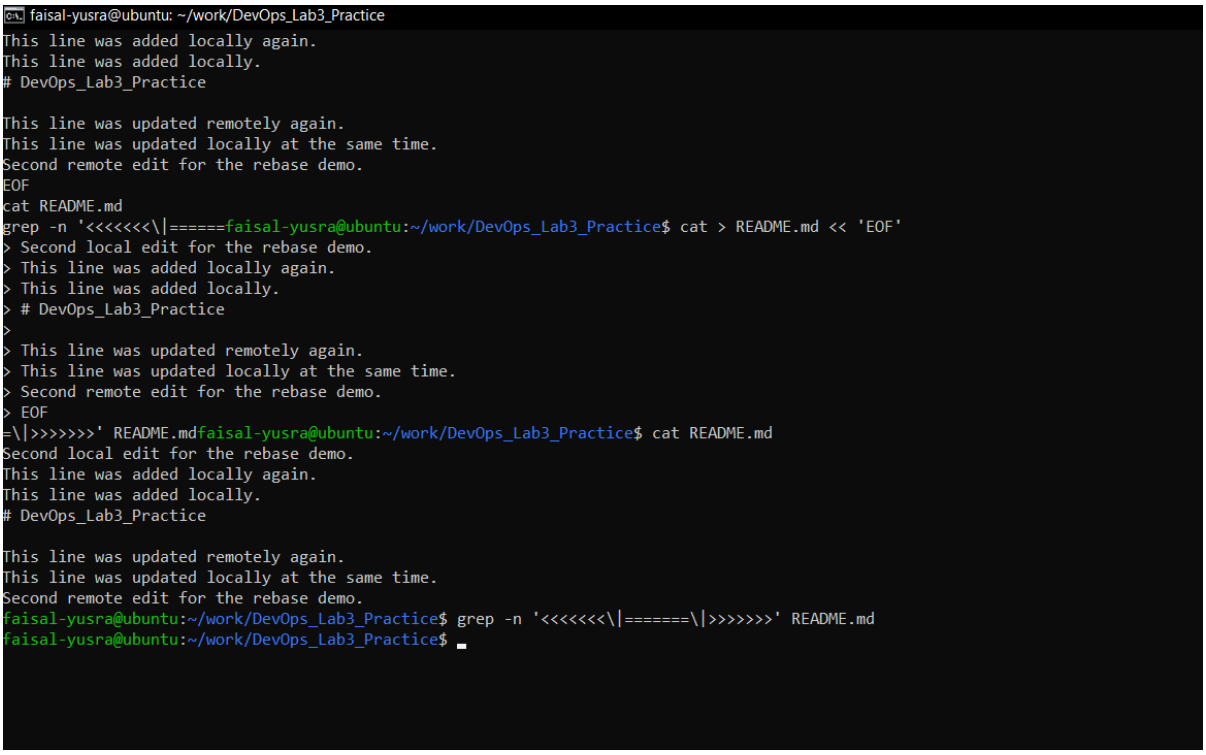

rebase_continue.png - git rebase --continue

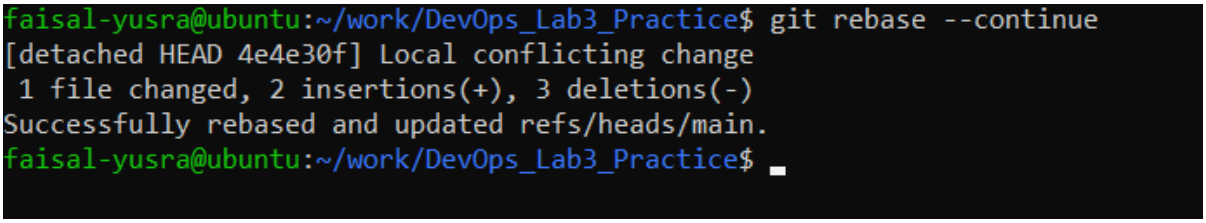

push_after_resolve.png - Push after resolving

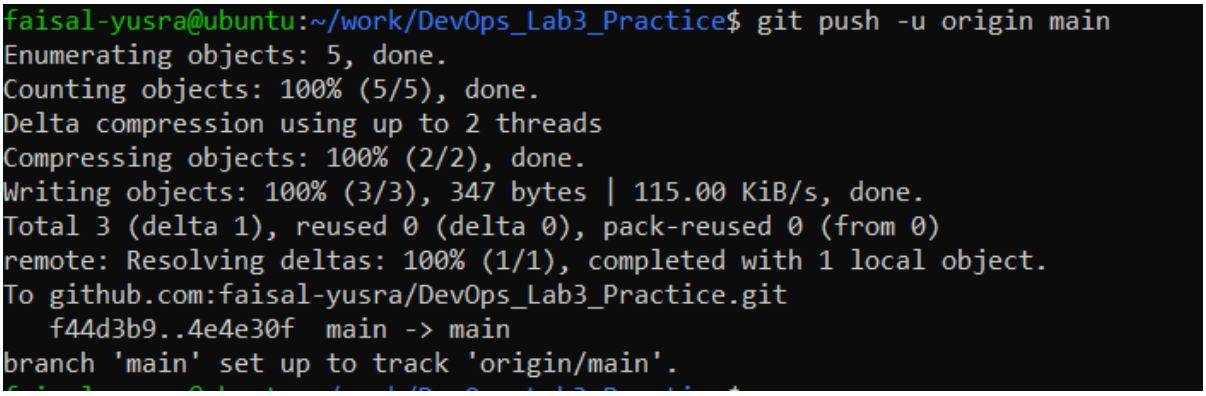

Task 3 - Managing Ignored Files with .gitignore and Removing Tracked Files

A textfiles folder was committed and pushed, then ignored with .gitignore (which does not untrack it). git rm -r --cached removed it from the repository while keeping the files locally.

Commands

```
mkdir textfiles   # a.txt, b.txt, c.txt
git add . && git commit -m "Added textfiles directory with three files"
git push origin main
echo "textfiles/*" > .gitignore
git add .gitignore && git commit -m "Added .gitignore ..."
git push origin main
git rm -r --cached textfiles
git add . && git commit -m "Removed tracked textfiles directory"
git push origin main
```

Screenshots

push_textfiles.png - textfiles directory committed and pushed


```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ mkdir textfiles
o "File B content" > textfiles/b.txt
echo "File C content" > textfiles/c.txt
git add .
git commit -m "Added textfiles directory with three files"
git push origin mainfaisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ echo "File A content" > textfiles/a.txt
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ echo "File B content" > textfiles/b.txt
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ echo "File C content" > textfiles/c.txt
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git add .
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git commit -m "Added textfiles directory with three files"
[main 84dc123] Added textfiles directory with three files
 3 files changed, 3 insertions(+)
 create mode 100644 textfiles/a.txt
 create mode 100644 textfiles/b.txt
 create mode 100644 textfiles/c.txt
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git push origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 2 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (6/6), 468 bytes | 78.00 KiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:faisal-yusra/DevOps_Lab3_Practice.git
   4e4e30f..84dc123  main -> main
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

gitignore_push.png - .gitignore added and pushed

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ echo "textfiles/*" > .gitignore
t -m "Added .gitignore to ignore textfiles directory"faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git add .gitignore

git push origin mainfaisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git commit -m "Added .gitignore to ignore textfiles directory"
[main b038fae] Added .gitignore to ignore textfiles directory
 1 file changed, 1 insertion(+)
 create mode 100644 .gitignore
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git push origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 357 bytes | 178.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:faisal-yusra/DevOps_Lab3_Practice.git
   84dc123..b038fae  main -> main
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

repo_still_has_textfiles.png - textfiles still visible on GitHub after adding .gitignore

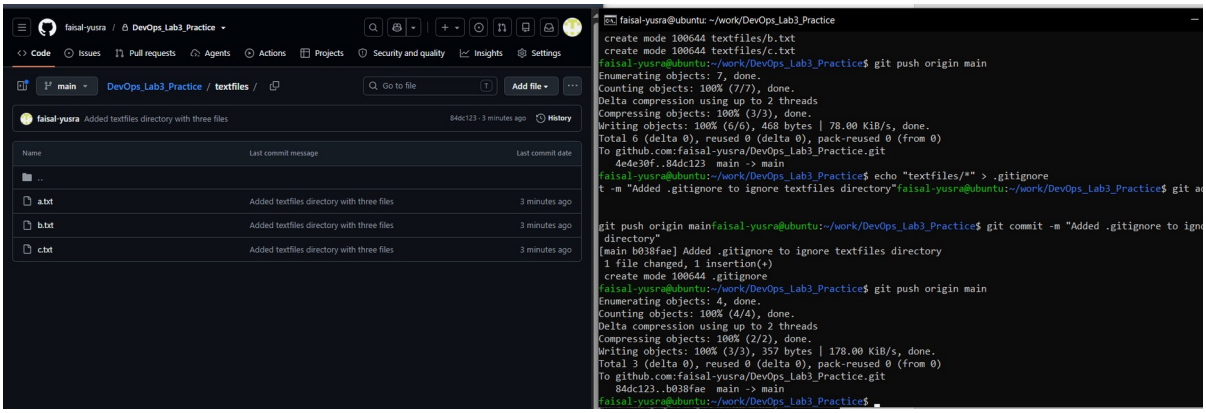


rm_cached_push.png - git rm -r --cached, commit and push (files still exist locally)

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git rm -r --cached textfiles
tracked textfiles directory"
git push origin main
ls term 'textfiles/a.txt'
rm 'textfiles/b.txt'
rm 'textfiles/c.txt'
xtfilesfaisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git add .
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git commit -m "Removed tracked textfiles directory"
[main 94ac355] Removed tracked textfiles directory
 3 files changed, 3 deletions(-)
 delete mode 100644 textfiles/a.txt
 delete mode 100644 textfiles/b.txt
 delete mode 100644 textfiles/c.txt
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git push origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 247 bytes | 247.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)

remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:faisal-yusra/DevOps_Lab3_Practice.git
   b038fae..94ac355  main -> main
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ ls textfiles
a.txt  b.txt  c.txt
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

repo_textfiles_removed.png - textfiles folder removed from GitHub

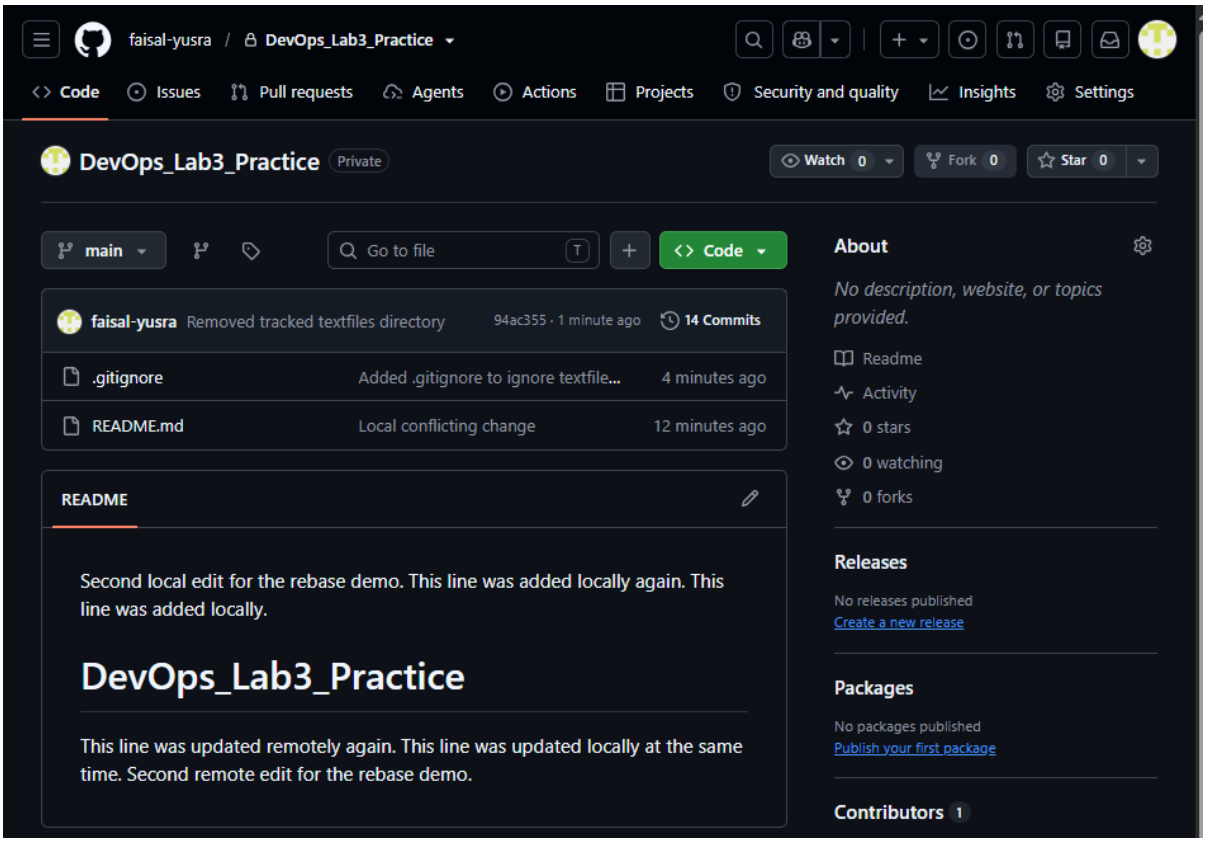

Task 4 - Create Temporary Changes and Use git stash


On feature-branch, an uncommitted change blocked checkout of main. git stash saved the change, the branches were switched, and git stash pop restored it.

Commands


```
git checkout -b feature-branch
git add README.md && git commit -m "Changes the README.md file"
git checkout main      # error with uncommitted changes
git stash
git checkout main
git checkout feature-branch
git status
git stash pop
```

Screenshots


modified_readme.png - Committed change on feature-branch

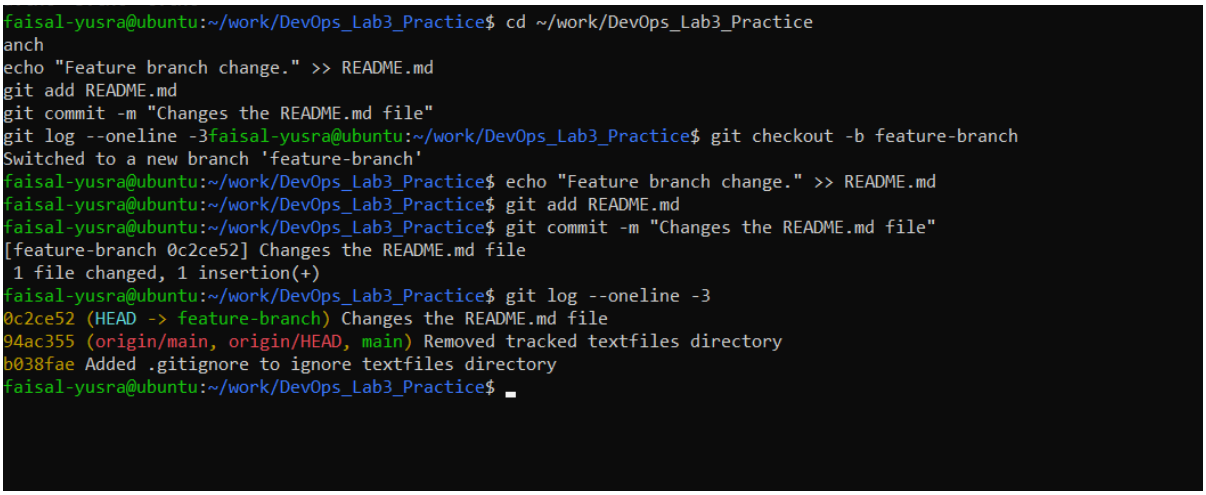


checkout_error.png - Checkout blocked by uncommitted changes

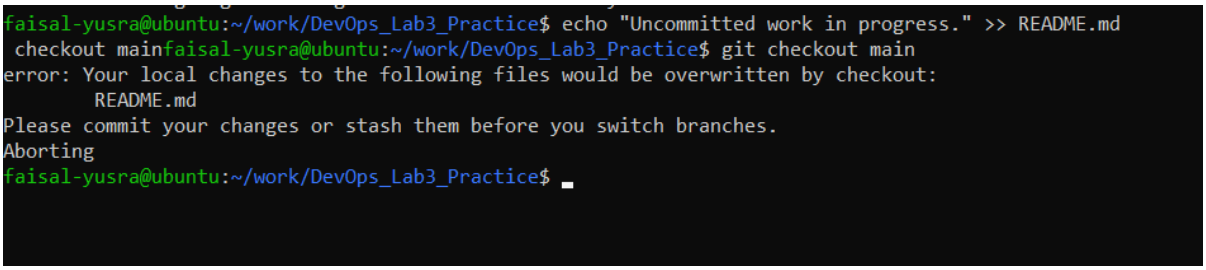

stash_command.png - git stash



branch_switched.png - Switched to main after stashing

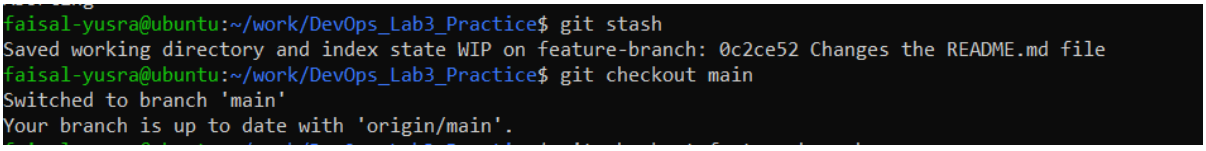

back_to_feature.png - Back on feature-branch

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git checkout feature-branch
Switched to branch 'feature-branch'
```

status_clean.png - Working tree clean

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git status
On branch feature-branch
nothing to commit, working tree clean
```

stash_pop.png - git stash pop restores the changes

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git stash pop
On branch feature-branch
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   README.md

no changes added to commit (use "git add" and/or "git commit -a")
Dropped refs/stash@{0} (4d7bb53754f1b377d27496df44950127dda4b91a)
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ cat README.md
Second local edit for the rebase demo.
This line was added locally again.
This line was added locally.
# DevOps_Lab3_Practice

This line was updated remotely again.
This line was updated locally at the same time.
Second remote edit for the rebase demo.
Feature branch change.
Uncommitted work in progress.
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

Task 5 - Checkout a Specific Commit Using git log

The history was listed, an older commit was checked out (detached HEAD), and main was checked out again.

Commands

```
git log --oneline
git checkout b5abe9f
git checkout main
```

Screenshots

log_before_checkout.png - git log --oneline

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git restore README.md
onelinefaisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git log --oneline
94ac355 (HEAD -> main, origin/main, origin/HEAD) Removed tracked textfiles directory
b038fae Added .gitignore to ignore textfiles directory
84dc123 Added textfiles directory with three files
4e4e30f Local conflicting change
f44d3b9 Remote conflicting change
a4bf32c Update README.md
e531104 Remote conflicting change.
b5e608a Second local update to README
65fa8a5 Second remote update to README.
7452a22 Merge branch 'main' of github.com:faisal-yusra/DevOps_Lab3_Practice
bff8916 Local update to README
b1d6546 Remote update to README
adc375d Local update to README
b5abe9f Initial commit
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

detached_head.png - Detached HEAD at the Initial commit

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git checkout b5abe9f
Note: switching to 'b5abe9f'.

You are in 'detached HEAD' state. You can look around, make experimental
changes and commit them, and you can discard any commits you make in this
state without impacting any branches by switching back to a branch.

If you want to create a new branch to retain commits you create, you may
do so (now or later) by using -c with the switch command. Example:

  git switch -c <new-branch-name>

Or undo this operation with:

  git switch -

Turn off this advice by setting config variable advice.detachedHead to false

HEAD is now at b5abe9f Initial commit
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

back_to_main.png - Back on main

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ cat README.md
# DevOps_Lab3_Practicefaisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git checkout main
Previous HEAD position was b5abe9f Initial commit
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
```

Task 6 - Resetting Commits (Soft vs Hard Reset)


Two commits were made and the history and file contents were checked. A soft reset keeps changes in the working tree, a hard reset discards them together with the commit.

Commands


```
git commit -m "Added test line"
git commit -m "Second test commit"
git log --oneline
git reset --soft HEAD~1
git status
git commit -m "Second Test commit"
git reset --hard HEAD~1
git log --oneline
git status
```

Screenshots

first_commit.png - First test commit




second_commit.png - Second test commit



log_before_reset.png - History before the reset



file_before_reset.png - README.md contains both test lines

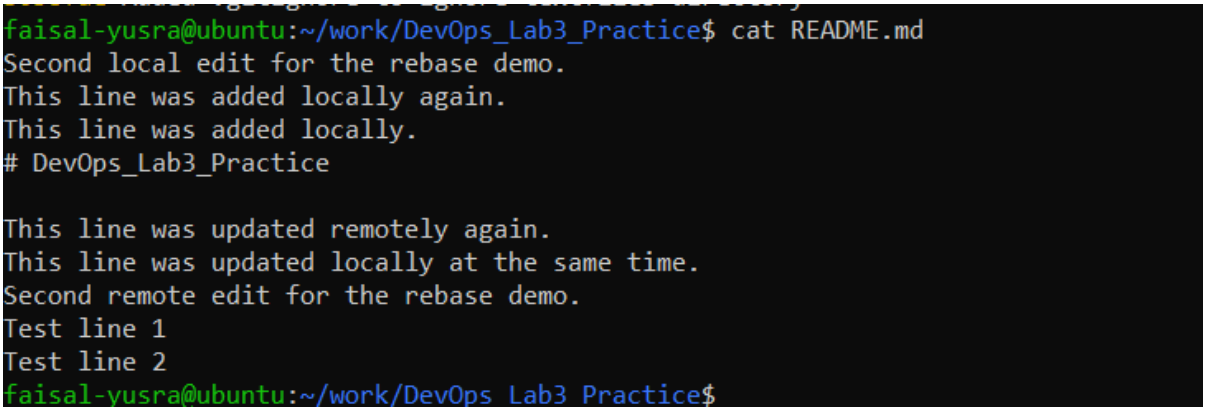

soft_reset.png - git reset --soft HEAD~1



log_after_soft_reset.png - History after the soft reset: one commit fewer



file_after_soft_reset.png - File contents after the soft reset: nothing lost

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ cat README.md
Second local edit for the rebase demo.
This line was added locally again.
This line was added locally.
# DevOps_Lab3_Practice

This line was updated remotely again.
This line was updated locally at the same time.
Second remote edit for the rebase demo.
Test line 1
Log message fix
Test line A
Test line B
```

status_after_soft_reset.png - git status: changes are staged

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   README.md
```

commit_after_soft_reset.png - Committing again

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git commit -m "Second Test commit"
[main d0d9e26] Second Test commit
 1 file changed, 1 insertion(+)
```

hard_reset.png - git reset --hard HEAD~1

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git reset --hard HEAD~1
HEAD is now at 51d483c Added test line A
```

log_after_hard_reset.png - History after the hard reset

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git log --oneline -3
51d483c (HEAD -> main) Added test line A
89fe435 (origin/test-force, origin/main, origin/HEAD, test-force) Revert "Added temporary text file"
9099d2f Added temporary text file
```

file_after_hard_reset.png - File and status after the hard reset (second line gone, tree clean)

```
nothing to commit, working tree clean
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git reset --hard HEAD~1
HEAD is now at a381707 Added test line
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ cat README.md
Second local edit for the rebase demo.
This line was added locally again.
This line was added locally.
# DevOps_Lab3_Practice

This line was updated remotely again.
This line was updated locally at the same time.
Second remote edit for the rebase demo.
Test line 1
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

Task 7 - Amending the Last Commit


A commit was made, then a second file was added to the same commit with git commit --amend, so the history still has a single commit.

Commands


```
git commit -m "Fix log message"
git add .
git commit --amend
git show --stat HEAD
```

Screenshots

first_amend_commit.png - Commit before amending

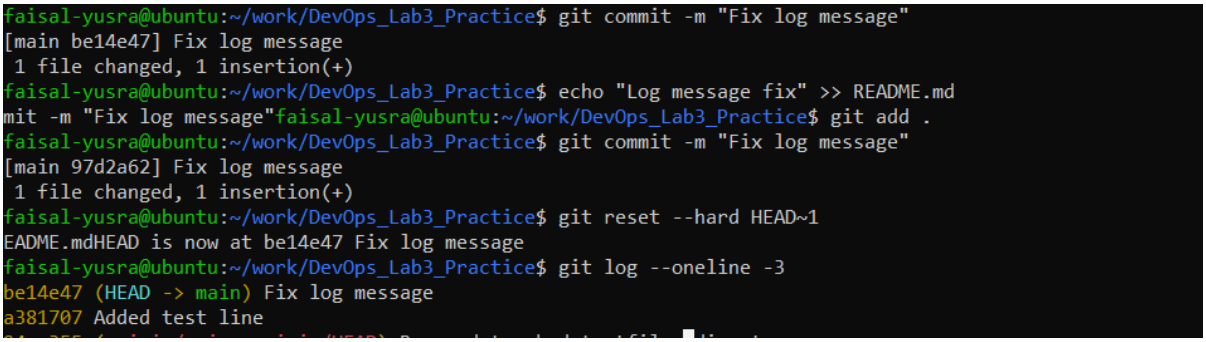

amend_commit.png - After git commit --amend: one commit containing README.md and notes.txt

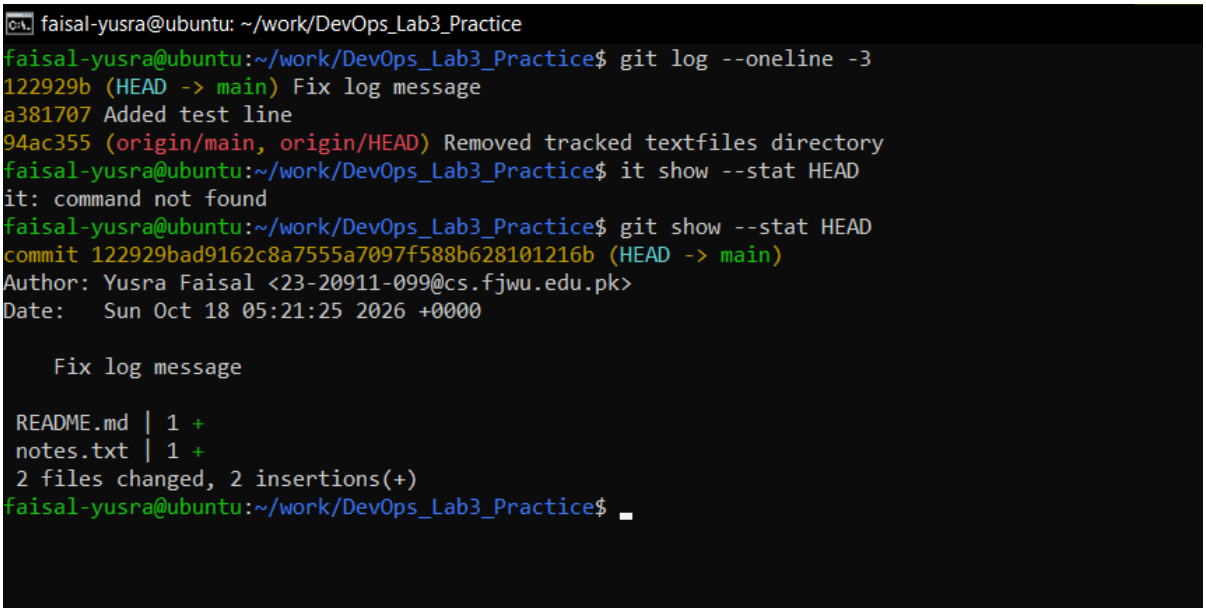

Task 8 - Reverting a Commit (Safe Undo on Remote Branch)


temp.txt was committed and pushed, then undone with git revert, which adds a new commit instead of rewriting history.

Commands


```
echo "temporary text" >> temp.txt
git add . && git commit -m "Added temporary text file"
git push origin main
git revert 9099d2f
git push origin main
```

Screenshots


commit_temp_file.png - temp.txt committed and pushed

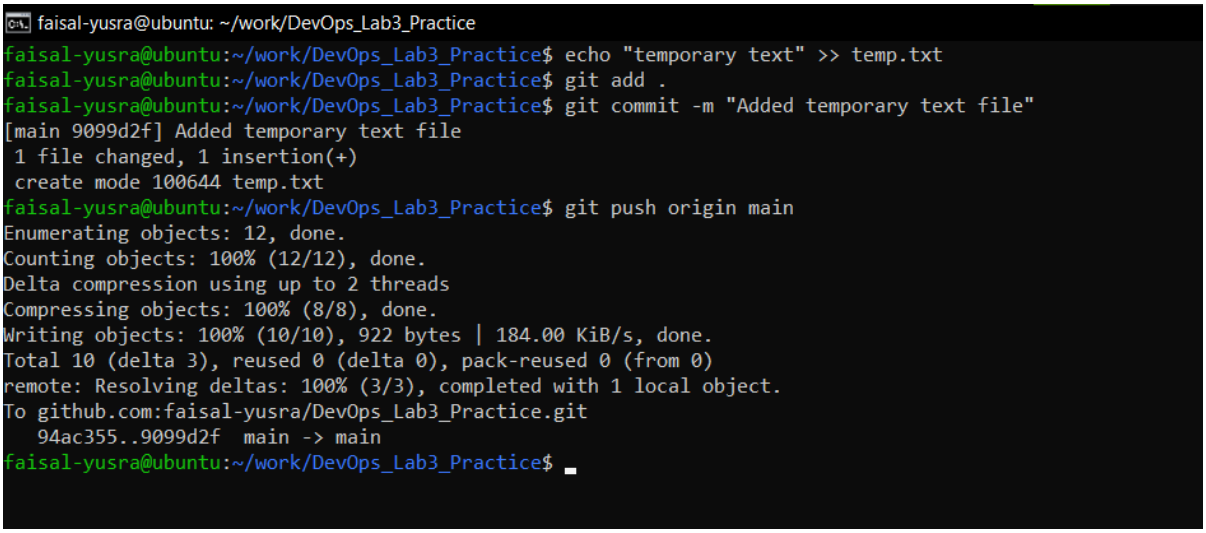

revert_commit.png - git revert creates a Revert commit

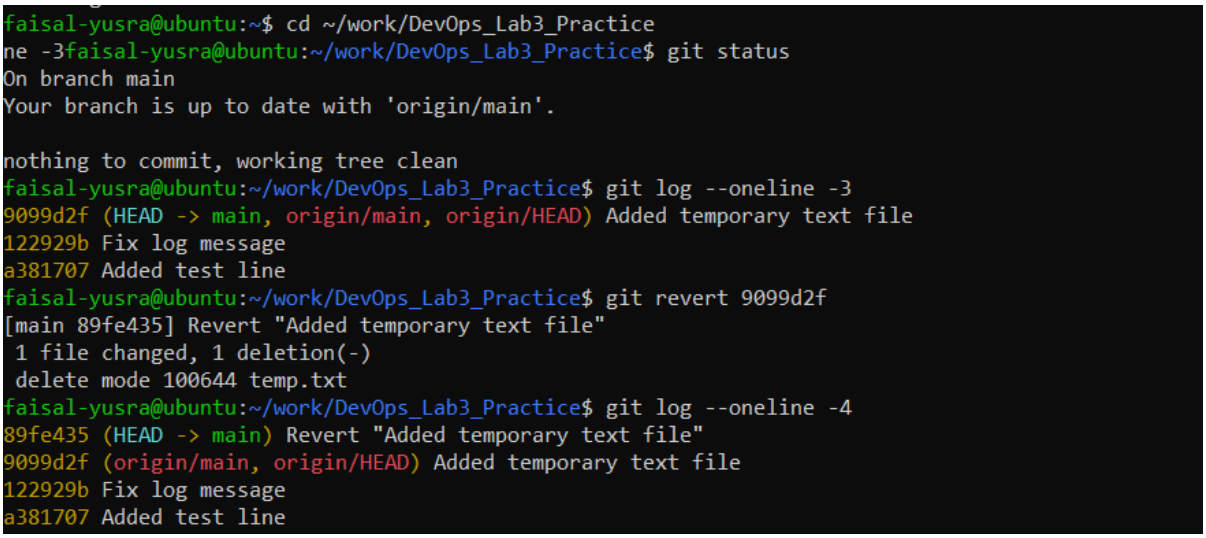

revert_push.png - Revert commit pushed

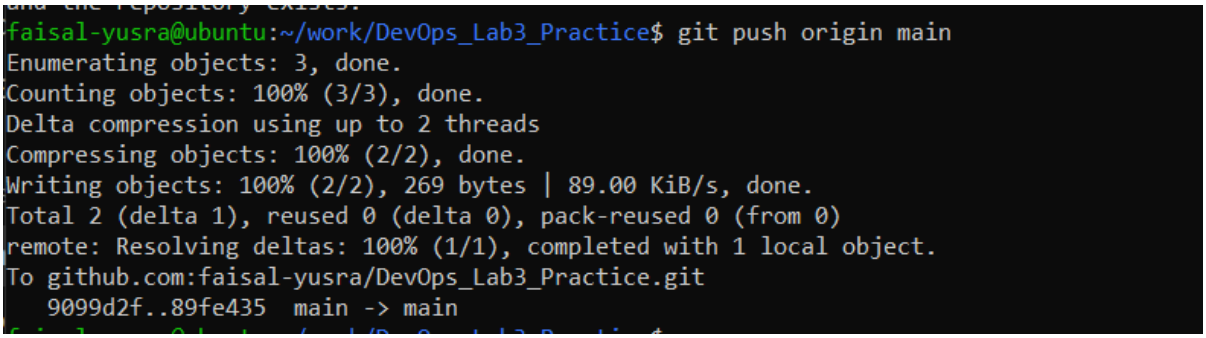

Task 9 - Force Push (With Caution)


On a separate branch (test-force), a commit was pushed and then removed locally with a hard reset. A normal push was rejected and --force overwrote the remote branch.

Commands


```
git checkout -b test-force
git commit -m "Force push test commit"
git push origin test-force
git reset --hard HEAD~1
git push origin test-force        # rejected
git push origin test-force --force
```

Screenshots


new_branch.png - New branch test-force

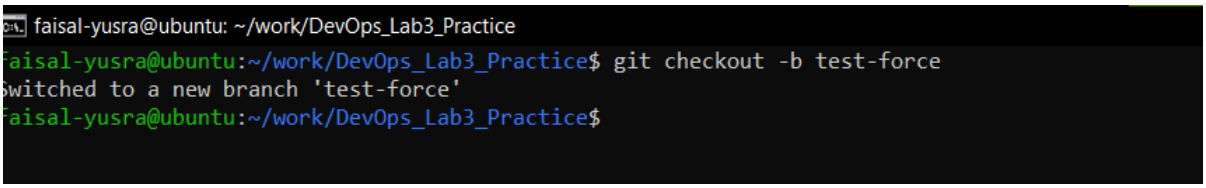

force_commit.png - Commit on test-force

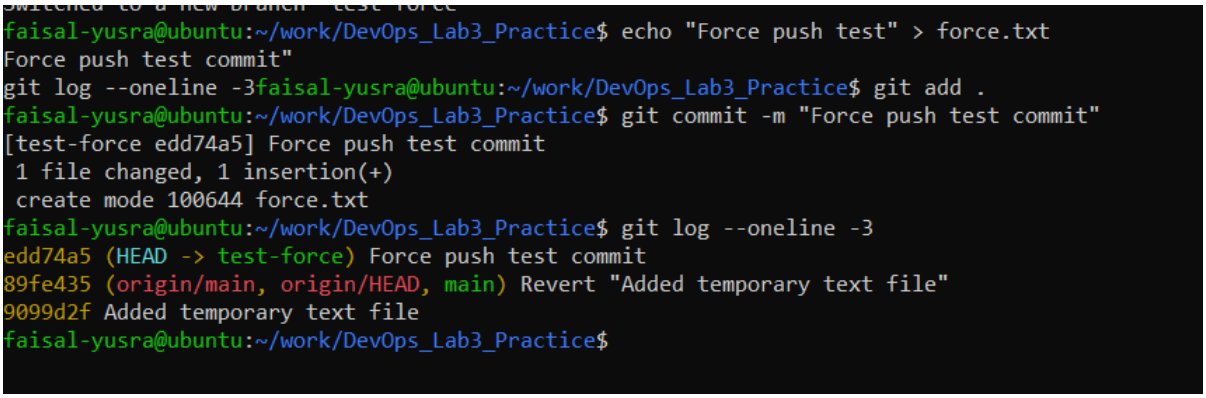

push_force_branch.png - Branch pushed to GitHub (new branch)

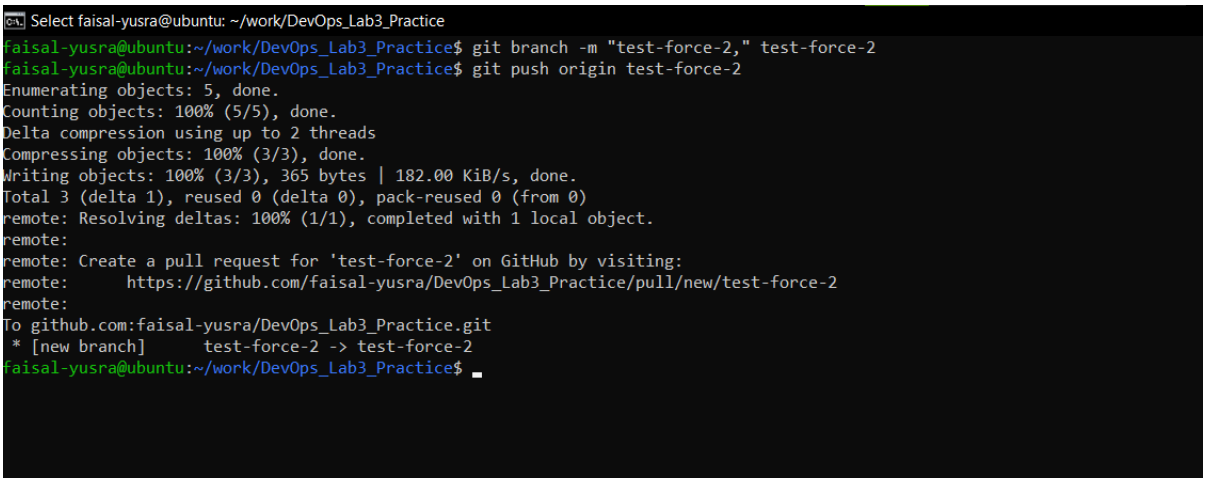

hard_reset_force.png - Hard reset removes the commit locally

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git reset --hard HEAD~1
HEAD is now at 89fe435 Revert "Added temporary text file"
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git log --oneline -3
89fe435 (HEAD -> test-force, origin/main, origin/HEAD, main) Revert "Added temporary text file"
9099d2f Added temporary text file
122929b Fix log message
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

normal_push.png - Normal push rejected (non-fast-forward)

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git push origin test-force
To github.com:faisal-yusra/DevOps_Lab3_Practice.git
 ! [rejected]        test-force -> test-force (non-fast-forward)
error: failed to push some refs to 'github.com:faisal-yusra/DevOps_Lab3_Practice.git'
hint: Updates were rejected because the tip of your current branch is behind
hint: its remote counterpart. If you want to integrate the remote changes,
hint: use 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

force_push.png - Force push succeeds (forced update)

```
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$ git push origin test-force --force
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:faisal-yusra/DevOps_Lab3_Practice.git
 + edd74a5...89fe435 test-force -> test-force (forced update)
faisal-yusra@ubuntu:~/work/DevOps_Lab3_Practice$
```

Task 10 - Running Gitea in GitHub Codespaces via Docker Compose


Gitea was forked and a Codespace was opened. The fork has no codespace branch any more, and the Gitea Codespace has no Docker, so the same Docker Compose setup (compose.yaml, included in this submission) was run from a Codespace on the practice repository. Gitea was then installed through the web page and a repository was created.

Commands


```
docker compose up -d
docker compose ps
# port 3000 set to Public, Gitea installed through the web UI
```

Screenshots


forked_gitea.png - Forked Gitea repository

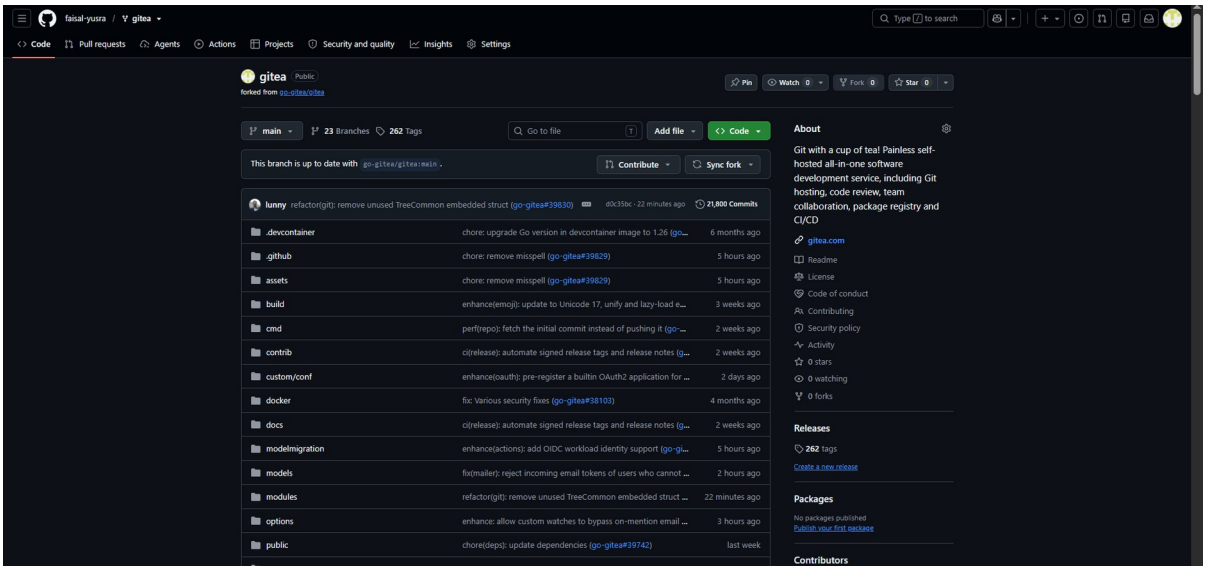


codespace_loading.png - Codespace loading

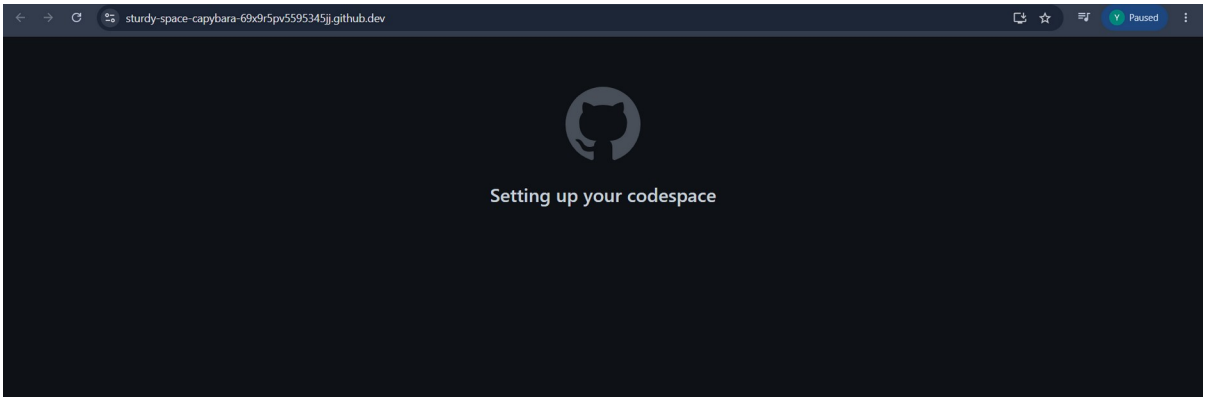


docker_up.png - Gitea container running via Docker Compose

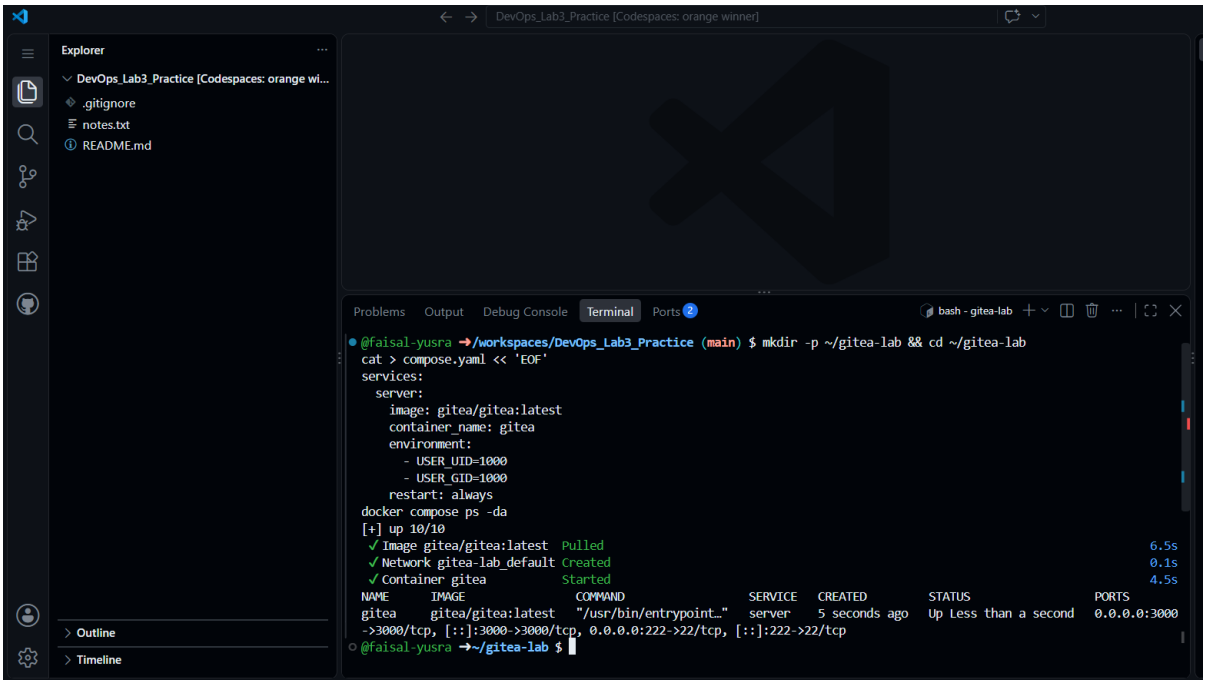


gitea_install_page.png - Gitea installation page

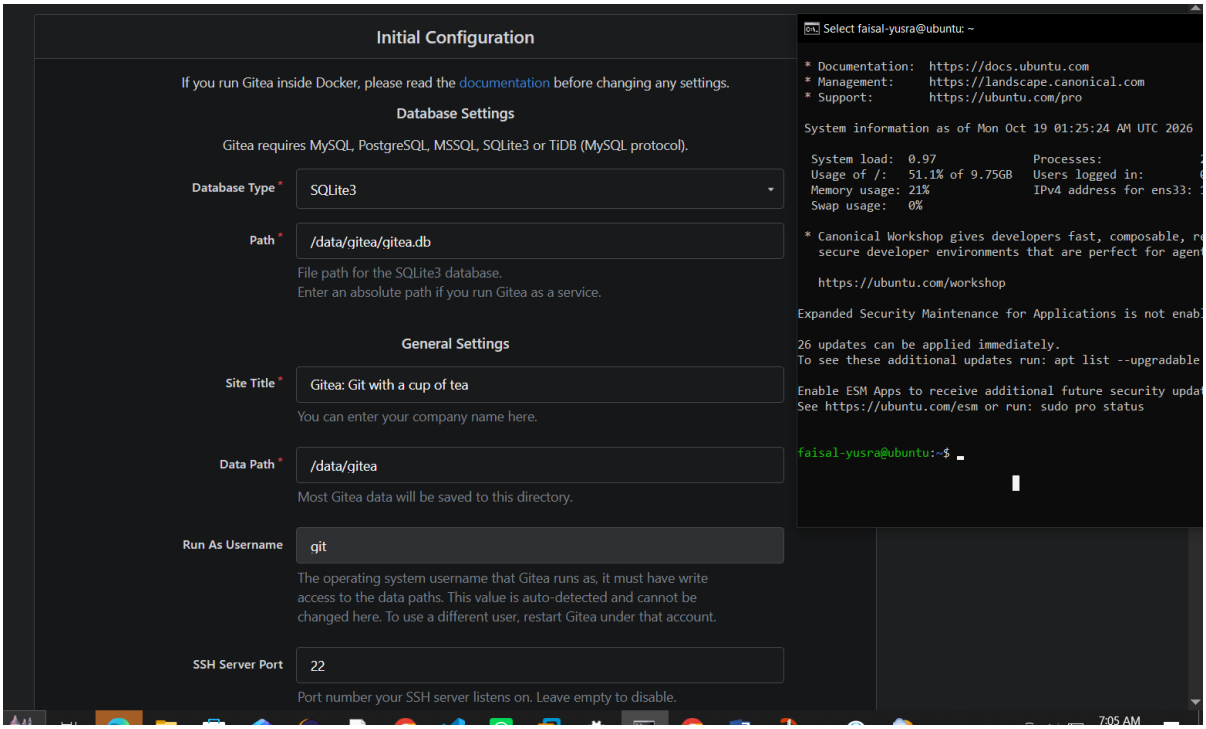


admin_setup.png - Administrator account settings

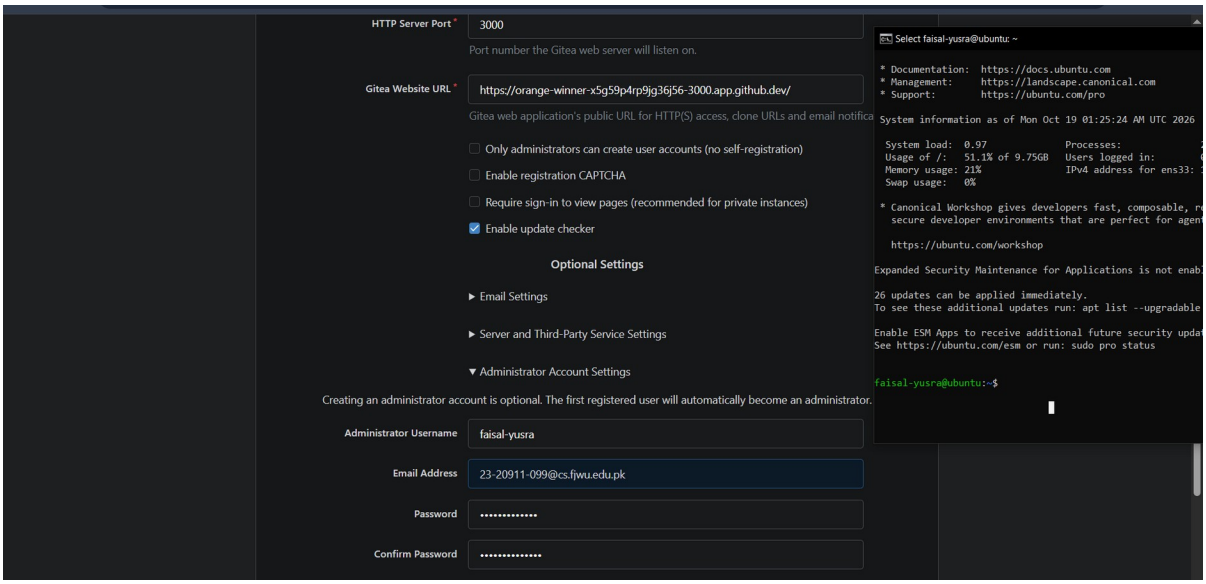

gitea_dashboard.png - Gitea dashboard after login

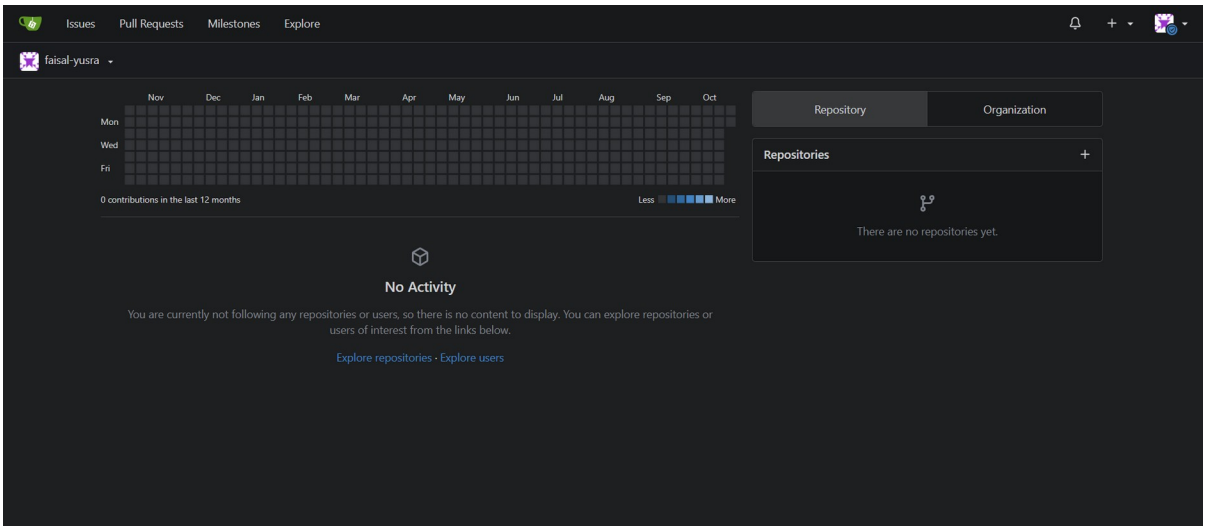

gitea_new_repo.png - New repository created in Gitea

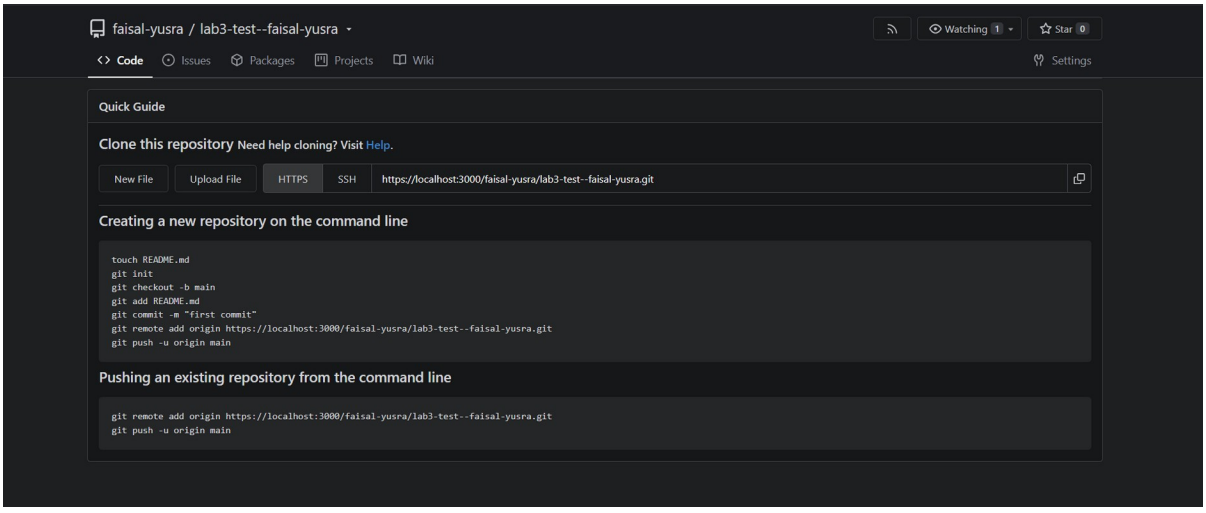

Task 11 - Creating a GitHub Pages Portfolio Site


A repository named faisal-yusra.github.io was created and a static portfolio page (built from my CV) was pushed. GitHub Pages serves it from the main branch. Live site: https://faisal-yusra.github.io/

Commands

```
git init
git branch -M main
git remote add origin git@github.com:faisal-yusra/faisal-yusra.github.io.git
git add .
git commit -m "Add portfolio site for GitHub Pages"
git push -u origin main
```

Screenshots

github_pages_repo.png - New faisal-yusra.github.io repository

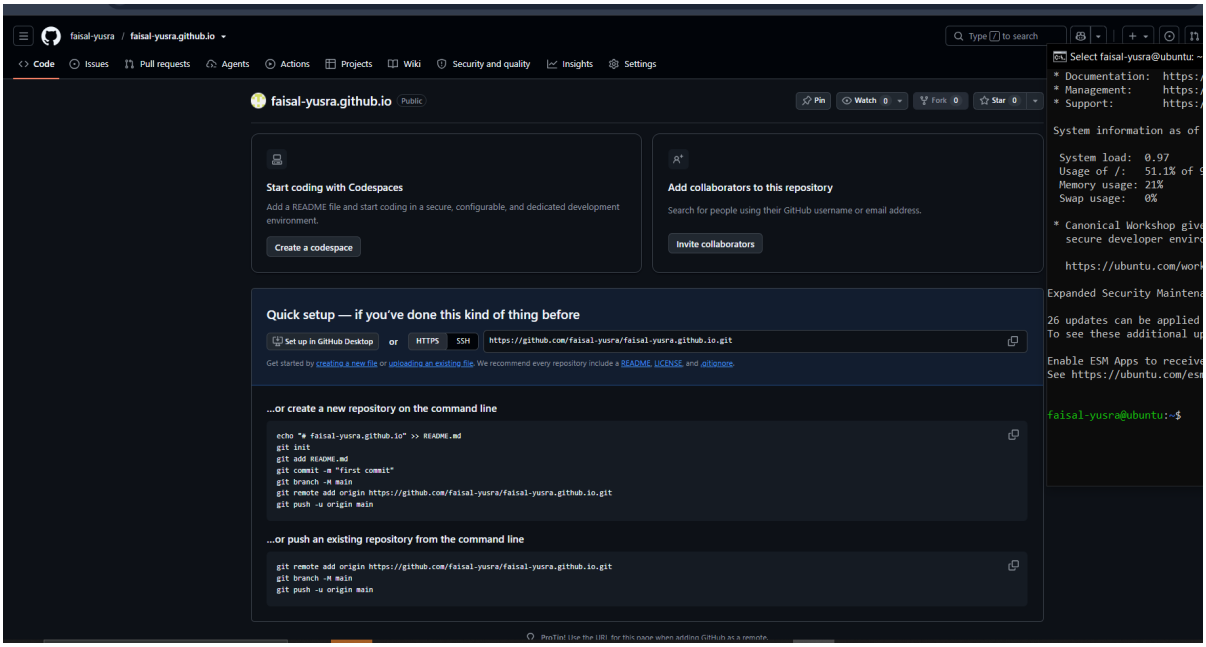


local_static_site.png - Local site files (index.html)

```
faisal-yusra@ubuntu: ~/work/faisal-yusra.github.io
>     <section class="skills">
>       <h2>Skills</h2>
>       <p><b>Programming</b> C, C++, Java, Python, Oracle SQL</p>
>       <p><b>Web</b> HTML, CSS, JavaScript, PHP</p>
>       <p><b>Data &amp;amp; BI</b> Power BI, MySQL</p>
>       <p><b>Design Tools</b> Canva, Adobe Express, Edraw Max</p>
>       <p><b>Productivity</b> MS Word, MS Excel, PowerPoint</p>
>     </section>
>
>     <section>
>       <h2>Internship Experience</h2>
>       <h3>Graphic Design Intern | Arch Technologies</h3>
>       <p class="meta">2025 | Remote | 1 Month</p>
>       <ul>
>         <li>Designed a restaurant menu card with a structured layout using Canva and Adobe Express.</li>
>         <li>Created a trifold brochure for a travel agency for print-ready output.</li>
>         <li>Developed product packaging design for Aura Skincare focusing on brand identity.</li>
>         <li>Produced a COVID-19 awareness poster for public health communication.</li>
>       </ul>
>     </section>
>
>     <section>
>       <h2>Societies &amp;amp; Activities</h2>
>       <h3>Character Building Society (CBS) | FJWU</h3>
>       <p>Active member contributing to personal development workshops and campus community initiatives.</p>
>       <h3>STEM Society | FJWU</h3>
>       <p>Participated in STEM-related events and collaborative learning sessions promoting science and technology
>     </section>
>
>     <section>
>       <h2>Hobbies</h2>
>       <ul>
>         <li>Creating family event cards and celebration layouts using Canva.</li>
>         <li>Photography, capturing everyday moments with an eye for composition and lighting.</li>
>         <li>Card games, enjoying strategic thinking and friendly competition.</li>
</secti>       </ul>
>     </section>
>   </div>
> </body>
> </html>
> EOF
faisal-yusra@ubuntu:~/work/faisal-yusra.github.io$ ls
index.html
faisal-yusra@ubuntu:~/work/faisal-yusra.github.io$
```

push_static_site.png - Site pushed to GitHub

```
faisal-yusra@ubuntu:~/work/faisal-yusra.github.io$ git commit -m "Add portfolio site for GitHub Pages"
[main (root-commit) 547de52] Add portfolio site for GitHub Pages
 1 file changed, 115 insertions(+)
 create mode 100644 index.html
faisal-yusra@ubuntu:~/work/faisal-yusra.github.io$ git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 2.44 KiB | 833.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:faisal-yusra/faisal-yusra.github.io.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

github_pages_settings.png - GitHub Pages settings: site is live

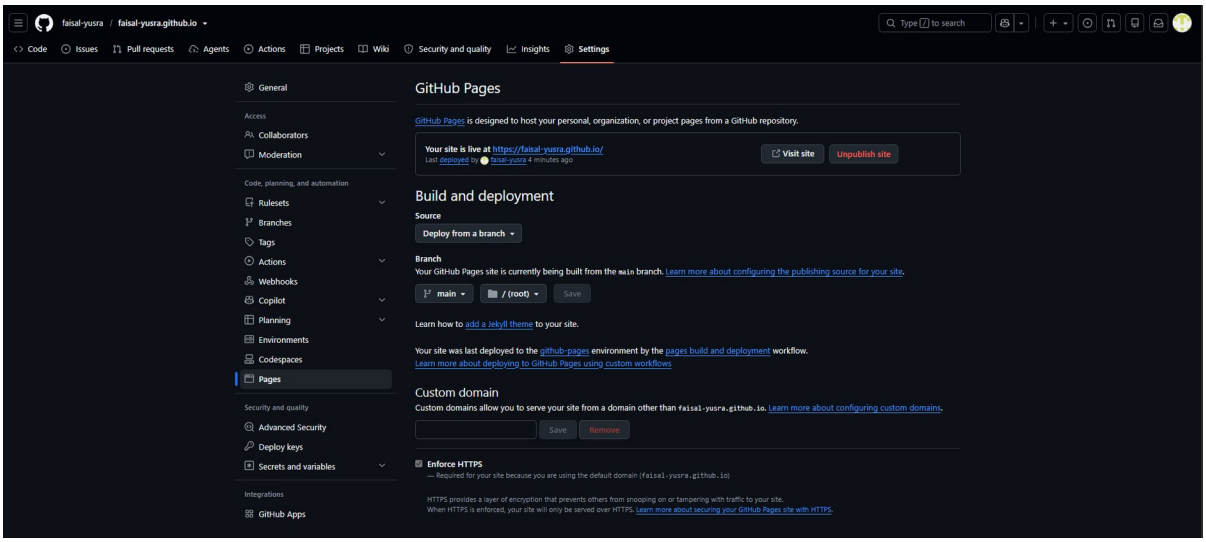

live_site.png - Live portfolio site

