


Nama : Faisal Rizqi Nashirudin


NIM : A11.2023.14954

Kelas : Pemrograman Sisi Klien (A11.4617)

Source Code

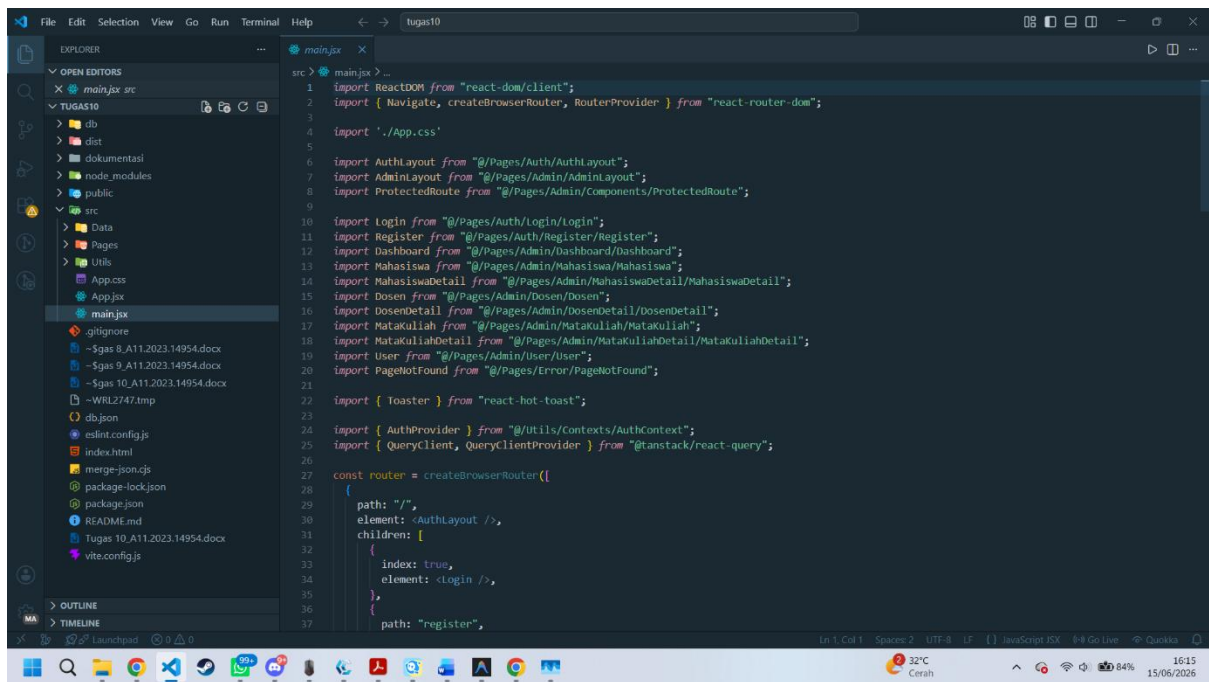

```
src > main.jsx > ...
1 import ReactDOM from "react-dom/client";
2 import { Navigate, createBrowserRouter, RouterProvider } from "react-router-dom";
3
4 import './App.css'
5
6 import AuthLayout from "@Pages/Auth/AuthLayout";
7 import AdminLayout from "@Pages/Admin/AdminLayout";
8 import ProtectedRoute from "@Pages/Admin/Components/ProtectedRoute";
9
10 import Login from "@Pages/Auth/Login/Login";
11 import Register from "@Pages/Auth/Register/Register";
12 import Dashboard from "@Pages/Admin/Dashboard/Dashboard";
13 import Mahasiswa from "@Pages/Admin/Mahasiswa/Mahasiswa";
14 import MahasiswaDetail from "@Pages/Admin/MahasiswaDetail/MahasiswaDetail";
15 import Dosen from "@Pages/Admin/Dosen/Dosen";
16 import DosenDetail from "@Pages/Admin/DosenDetail/DosenDetail";
17 import Matakuliah from "@Pages/Admin/Matakuliah/Matakuliah";
18 import MatakuliahDetail from "@Pages/Admin/MatakuliahDetail/MatakuliahDetail";
19 import User from "@Pages/Admin/User/User";
20 import PageNotFound from "@Pages/Error/PageNotFound";
21
22 import { Toaster } from "react-hot-toast";
23
24 import { AuthProvider } from "@Utils/Contexts/AuthContext";
25 import { QueryClient, QueryClientProvider } from "@tanstack/react-query";
26
27 const router = createBrowserRouter([
28   {
29     path: "/",
30     element: <AuthLayout />,
31     children: [
32       {
33         index: true,
34         element: <Login />,
35       },
36     ],
37     path: "register",
38   },
39 ],
40 );
41
42 const router = createBrowserRouter([
43   {
44     path: "/admin",
45     element: (
46       <ProtectedRoute>
47       <AdminLayout />
48     </ProtectedRoute>
49   ),
50   children: [
51     {
52       index: true,
53       element: <Navigate to="dashboard" />,
54     },
55     {
56       path: "dashboard",
57       element: <Dashboard />,
58     },
59     {
60       path: "mahasiswa",
61       children: [
62         {
63           index: true,
64           element: <Mahasiswa />,
65         },
66         {
67           path: ":id",
68           element: <MahasiswaDetail />,
69         },
70       ],
71     },
72   ],
73 ],
74 );
```

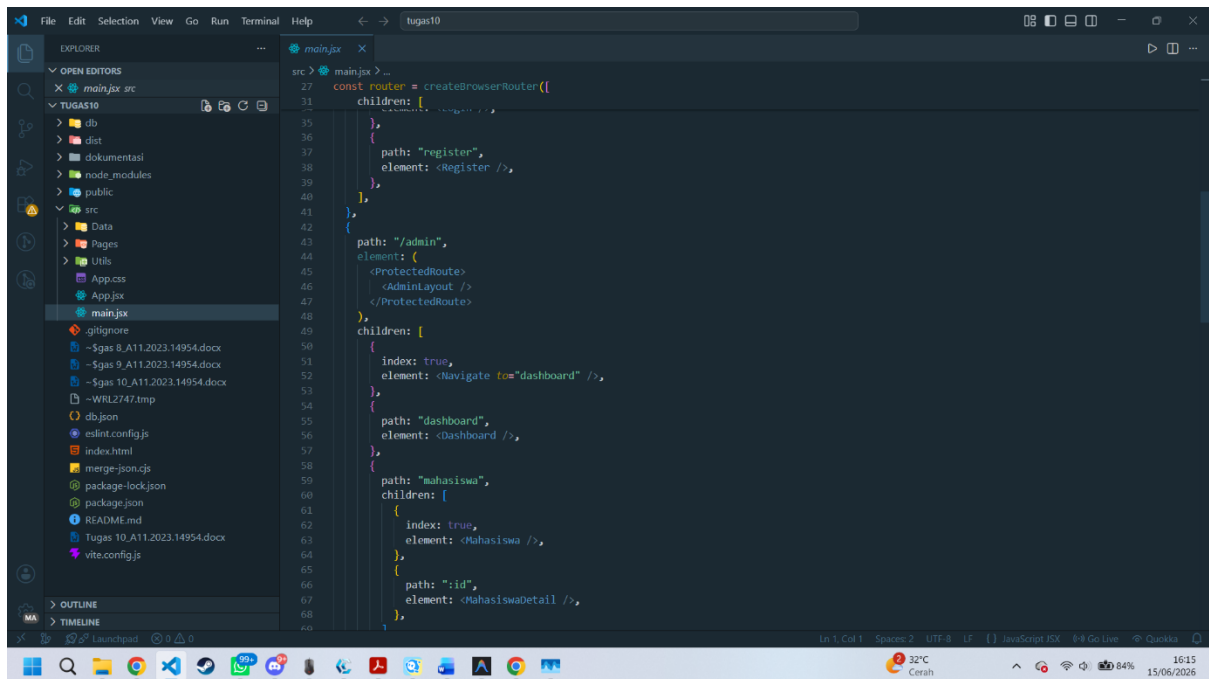

```
src > main.jsx > ...
27 const router = createBrowserRouter([
31   children: [
32     {
33       index: true,
34       element: <Navigate to="/" />,
35     },
36     {
37       path: "register",
38       element: <Register />,
39     },
40   ],
41 },
42 ],
43 );
44
45 const router = createBrowserRouter([
46   {
47     path: "/admin",
48     element: (
49       <ProtectedRoute>
50       <AdminLayout />
51     </ProtectedRoute>
52   ),
53   children: [
54     {
55       index: true,
56       element: <Navigate to="dashboard" />,
57     },
58     {
59       path: "dashboard",
60       element: <Dashboard />,
61     },
62     {
63       path: "mahasiswa",
64       children: [
65         {
66           index: true,
67           element: <Mahasiswa />,
68         },
69         {
70           path: ":id",
71           element: <MahasiswaDetail />,
72         },
73       ],
74     },
75   ],
76 ],
77 );
```



```
src > Utils > Hooks > useMahasiswa.jsx > ...
1 import { useQuery, useMutation, useQueryClient } from "@tanstack/react-query";
2 import {
3   getAllMahasiswa,
4   getMahasiswa,
5   storeMahasiswa,
6   updateMahasiswa,
7   deleteMahasiswa,
8 } from "@Utils/Api/MahasiswaApi";
9 import { toastSuccess, toastError } from "@Utils/Helpers/toastHelpers";
10
11 // Ambil semua mahasiswa
12 export const useMahasiswa = () => {
13   useQuery({
14     queryKey: ["mahasiswa"],
15     queryFn: getAllMahasiswa,
16     select: (res) => res?.data ?? [],
17   });
18 }
19
20 // Ambil 1 mahasiswa
21 export const useGetMahasiswa = (id) => {
22   useQuery({
23     queryKey: ["mahasiswa", id],
24     queryFn: () => getMahasiswa(id),
25     select: (res) => res?.data ?? null,
26     enabled: !!id,
27   });
28 }
29
30 // Tambah
31 export const useStoreMahasiswa = () => {
32   const queryClient = useQueryClient();
33   return useMutation({
34     mutationFn: storeMahasiswa,
35     onSuccess: () => {
36       queryClient.invalidateQueries({ queryKey: ["mahasiswa"] });
37       toastSuccess("Mahasiswa berhasil ditambahkan!");
38     },
39     onError: () => toastError("Gagal menambahkan mahasiswa."),
40   });
41 }
```


```
20 export const useGetMahasiswa = (id) => {
21   useQuery({
22     queryKey: ["mahasiswa", id],
23     queryFn: () => getMahasiswa(id),
24     select: (res) => res?.data ?? null,
25     enabled: !!id,
26   });
27 }
28
29 // Tambah
30 export const useStoreMahasiswa = () => {
31   const queryClient = useQueryClient();
32   return useMutation({
33     mutationFn: storeMahasiswa,
34     onSuccess: () => {
35       queryClient.invalidateQueries({ queryKey: ["mahasiswa"] });
36       toastSuccess("Mahasiswa berhasil ditambahkan!");
37     },
38     onError: () => toastError("Gagal menambahkan mahasiswa."),
39   });
40 }
41
42 // Edit
43 export const useUpdateMahasiswa = () => {
44   const queryClient = useQueryClient();
45   return useMutation({
46     mutationFn: ({ id, data }) => updateMahasiswa(id, data),
47     onSuccess: () => {
48       queryClient.invalidateQueries({ queryKey: ["mahasiswa"] });
49       toastSuccess("Mahasiswa berhasil diperbarui!");
50     },
51     onError: () => toastError("Gagal memperbarui mahasiswa."),
52   });
53 }
54
55 // Hapus
56 export const useDeleteMahasiswa = () => {
57   const queryClient = useQueryClient();
58   return useMutation({
59     mutationFn: deleteMahasiswa,
60     onSuccess: () => {
61       queryClient.invalidateQueries({ queryKey: ["mahasiswa"] });
62       toastSuccess("Mahasiswa berhasil dihapus!");
63     },
64     onError: () => toastError("Gagal menghapus mahasiswa."),
65   });
66 }
```

The screenshot shows the VS Code editor with the file `useMahasiswa.jsx` open. The Explorer sidebar on the left shows the project structure, including `src > Hooks > useMahasiswa.jsx`. The main editor area displays the following code:

```
29 export const useStoreMahasiswa = () => {
30   // ...
31   // ...
32   // ...
33   // ...
34   // ...
35   // ...
36   // ...
37   // ...
38   // ...
39   // ...
40   // ...
41   // Edit
42   export const useUpdateMahasiswa = () => {
43     const queryClient = useQueryClient();
44     return useMutation({
45       mutationFn: ({ id, data }) => updateMahasiswa(id, data),
46       onSuccess: () => {
47         queryClient.invalidateQueries({ queryKey: ["mahasiswa"] });
48         toastSuccess("Mahasiswa berhasil diperbarui!");
49       },
50       onError: () => toastError("Gagal memperbarui mahasiswa."),
51     });
52   };
53   // Hapus
54   export const useDeleteMahasiswa = () => {
55     const queryClient = useQueryClient();
56     return useMutation({
57       mutationFn: deleteMahasiswa,
58       onSuccess: () => {
59         queryClient.invalidateQueries({ queryKey: ["mahasiswa"] });
60         toastSuccess("Mahasiswa berhasil dihapus!");
61       },
62       onError: () => toastError("Gagal menghapus mahasiswa."),
63     });
64   };
65   // ...
66   // ...
```


The screenshot shows the VS Code editor with the file `useDosen.jsx` open. The Explorer sidebar on the left shows the project structure, including `src > Hooks > useDosen.jsx`. The main editor area displays the following code:

```
1 import { useQuery, useMutation, useQueryClient } from "@tanstack/react-query";
2 import {
3   getAllDosen,
4   getDosen,
5   storeDosen,
6   updateDosen,
7   deleteDosen,
8 } from "@utils/Api/DosenApi";
9 import { toastSuccess, toastError } from "@utils/Helpers/toastHelpers";
10
11 // Ambil semua dosen
12 export const useDosen = () => {
13   useQuery({
14     queryKey: ["dosen"],
15     queryFn: getAllDosen,
16     select: (res) => res?.data ?? [],
17   });
18 }
19
20 // Ambil 1 dosen
21 export const useGetDosen = (id) => {
22   useQuery({
23     queryKey: ["dosen", id],
24     queryFn: () => getDosen(id),
25     select: (res) => res?.data ?? null,
26     enabled: !!id,
27   });
28 }
29
30 // Tambah
31 export const useStoreDosen = () => {
32   const queryClient = useQueryClient();
33   return useMutation({
34     mutationFn: storeDosen,
35     onSuccess: () => {
36       queryClient.invalidateQueries({ queryKey: ["dosen"] });
37       toastSuccess("Dosen berhasil ditambahkan!");
38     },
39     onError: () => toastError("Gagal menambahkan dosen."),
40   });
41 }
```

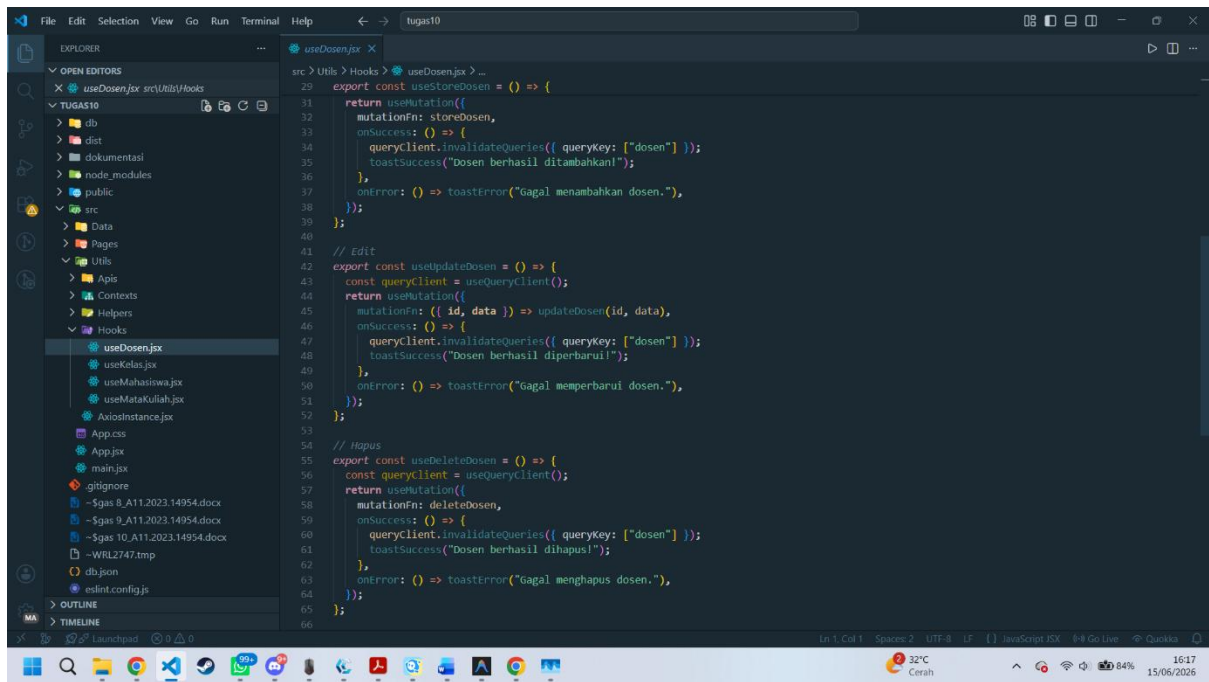

The screenshot shows the VS Code editor with the file explorer on the left and the code editor on the right. The file explorer shows the project structure with folders like db, dist, dokumentasi, node_modules, public, src, and hooks. The code editor displays the useDosen.js file, which contains three hooks: useStoreDosen, useUpdateDosen, and useDeleteDosen. The useStoreDosen hook uses useMutation to store a new dosen. The useUpdateDosen hook uses useMutation to update an existing dosen. The useDeleteDosen hook uses useMutation to delete a dosen. The code is written in JavaScript and uses the useQueryClient and useMutation hooks from react-query.

```
src > Utils > Hooks > useDosen.js > ...
29 export const useStoreDosen = () => {
30   return useMutation({
31     mutationFn: storeDosen,
32     onSuccess: () => {
33       queryClient.invalidateQueries({ queryKey: ["dosen"] });
34       toastSuccess("Dosen berhasil ditambahkan!");
35     },
36     onError: () => toastError("Gagal menambahkan dosen."),
37   });
38 }
39
40 // Edit
41 export const useUpdateDosen = () => {
42   const queryClient = useQueryClient();
43   return useMutation({
44     mutationFn: (id, data) => updateDosen(id, data),
45     onSuccess: () => {
46       queryClient.invalidateQueries({ queryKey: ["dosen"] });
47       toastSuccess("Dosen berhasil diperbarui!");
48     },
49     onError: () => toastError("Gagal memperbarui dosen."),
50   });
51 }
52
53 // Hapus
54 export const useDeleteDosen = () => {
55   const queryClient = useQueryClient();
56   return useMutation({
57     mutationFn: deleteDosen,
58     onSuccess: () => {
59       queryClient.invalidateQueries({ queryKey: ["dosen"] });
60       toastSuccess("Dosen berhasil dihapus!");
61     },
62     onError: () => toastError("Gagal menghapus dosen."),
63   });
64 }
65
66
```

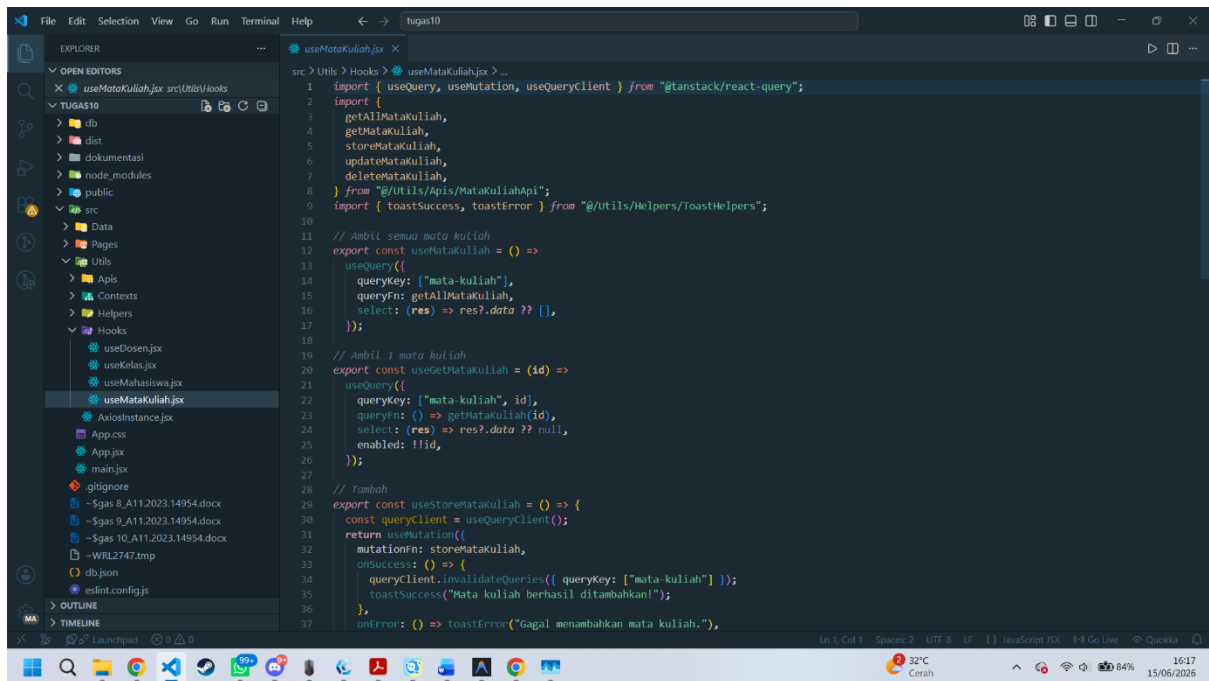

The screenshot shows the VS Code editor with the file explorer on the left and the code editor on the right. The file explorer shows the project structure with folders like db, dist, dokumentasi, node_modules, public, src, and hooks. The code editor displays the useMataKuliah.js file, which contains three hooks: useAllMataKuliah, useGetMataKuliah, and useStoreMataKuliah. The useAllMataKuliah hook uses useQuery to fetch all mata kuliah. The useGetMataKuliah hook uses useQuery to fetch a specific mata kuliah by id. The useStoreMataKuliah hook uses useMutation to store a new mata kuliah. The code is written in JavaScript and uses the useQuery and useMutation hooks from react-query.



```
src > Utils > Hooks > useMataKuliah.js > ...
1 import { useQuery, useMutation, useQueryClient } from "@tanstack/react-query";
2 import {
3   getAllMataKuliah,
4   getMataKuliah,
5   storeMataKuliah,
6   updateMataKuliah,
7   deleteMataKuliah,
8 } from "@utils/Api/MataKuliahApi";
9 import { toastSuccess, toastError } from "@utils/Helpers/toastHelpers";
10
11 // Ambil semua mata kuliah
12 export const useAllMataKuliah = () => {
13   useQuery({
14     queryKey: ["mata-kuliah"],
15     queryFn: getAllMataKuliah,
16     select: (res) => res?.data ?? [],
17   });
18 }
19
20 // Ambil 1 mata kuliah
21 export const useGetMataKuliah = (id) => {
22   useQuery({
23     queryKey: ["mata-kuliah", id],
24     queryFn: () => getMataKuliah(id),
25     select: (res) => res?.data ?? null,
26     enabled: !!id,
27   });
28 }
29
30 // Tambah
31 export const useStoreMataKuliah = () => {
32   const queryClient = useQueryClient();
33   return useMutation({
34     mutationFn: storeMataKuliah,
35     onSuccess: () => {
36       queryClient.invalidateQueries({ queryKey: ["mata-kuliah"] });
37       toastSuccess("Mata kuliah berhasil ditambahkan!");
38     },
39     onError: () => toastError("Gagal menambahkan mata kuliah."),
40   });
41 }
42
```


The screenshot shows the VS Code editor with the file `useMataKuliah.jsx` open. The Explorer sidebar on the left shows the project structure, with `src > Utils > Hooks > useMataKuliah.jsx` selected. The code in the editor defines three custom hooks: `useStoreMataKuliah`, `useUpdateMataKuliah`, and `useDeleteMataKuliah`. Each hook uses `useQueryClient` to manage the cache and `toast` for user feedback. The status bar at the bottom indicates the file is in UTF-8 encoding with 1 space and 2 tabs.

```
29 export const useStoreMataKuliah = () => {
30   const [data, setData] = useState([]);
31   const onSuccess = () => {
32     toastSuccess("Mata kuliah berhasil ditambahkan!");
33   };
34   const onError = () => toastError("Gagal menambahkan mata kuliah.");
35 };
36
37 // Edit
38 export const useUpdateMataKuliah = () => {
39   const queryClient = useQueryClient();
40   return useMutation({
41     mutationFn: ({ id, data }) => updateMataKuliah(id, data),
42     onSuccess: () => {
43       queryClient.invalidateQueries({ queryKey: ["mata-kuliah"] });
44       toastSuccess("Mata kuliah berhasil diperbarui!");
45     },
46     onError: () => toastError("Gagal memperbarui mata kuliah."),
47   });
48 };
49
50 // Hapus
51 export const useDeleteMataKuliah = () => {
52   const queryClient = useQueryClient();
53   return useMutation({
54     mutationFn: deleteMataKuliah,
55     onSuccess: () => {
56       queryClient.invalidateQueries({ queryKey: ["mata-kuliah"] });
57       toastSuccess("Mata kuliah berhasil dihapus!");
58     },
59     onError: () => toastError("Gagal menghapus mata kuliah."),
60   });
61 };
62
63
64
65
66
```


The screenshot shows the VS Code editor with the file `Mahasiswa.jsx` open. The Explorer sidebar on the left shows the project structure, with `src > Pages > Admin > Mahasiswa > Mahasiswa.jsx` selected. The code in the editor defines the `Mahasiswa` component, which uses `useState` for local state, `useEffect` for side effects, and the custom hooks from the previous file. It also uses `confirmDelete`, `confirmUpdate`, and `toastError` for user interaction. The status bar at the bottom indicates the file is in UTF-8 encoding with 1 space and 2 tabs.



```
1 import Card from "@Pages/Admin/Components/Card";
2 import Heading from "@Pages/Admin/Components/Heading";
3 import Button from "@Pages/Admin/Components/Button";
4
5 import { useEffect, useState } from "react";
6 import { useNavigate } from "react-router-dom";
7
8 import MahasiswaTable from "../MahasiswaTable";
9 import MahasiswaModal from "../MahasiswaModal";
10
11 import {
12   confirmDelete,
13   confirmUpdate,
14 } from "@Utils/Helpers/SwalHelpers";
15
16 import { toastError } from "@Utils/Helpers/ToastHelpers";
17
18 import {
19   useMahasiswa,
20   useStoreMahasiswa,
21   useUpdateMahasiswa,
22   useDeleteMahasiswa,
23 } from "@Utils/Hooks/useMahasiswa";
24 import { useKelas } from "@Utils/Hooks/useKelas";
25 import { useMataKuliah } from "@Utils/Hooks/useMataKuliah";
26
27 import { useAuthStateContext } from "@Utils/Contexts/AuthContext";
28
29 const Mahasiswa = () => {
30   const navigate = useNavigate();
31   const { user } = useAuthStateContext();
32
33   const { data: mahasiswa = [] } = useMahasiswa();
34   const { data: kelas = [] } = useKelas();
35   const { data: matakuliah = [] } = useMataKuliah();
36
37   const { mutate: store } = useStoreMahasiswa();
38
```

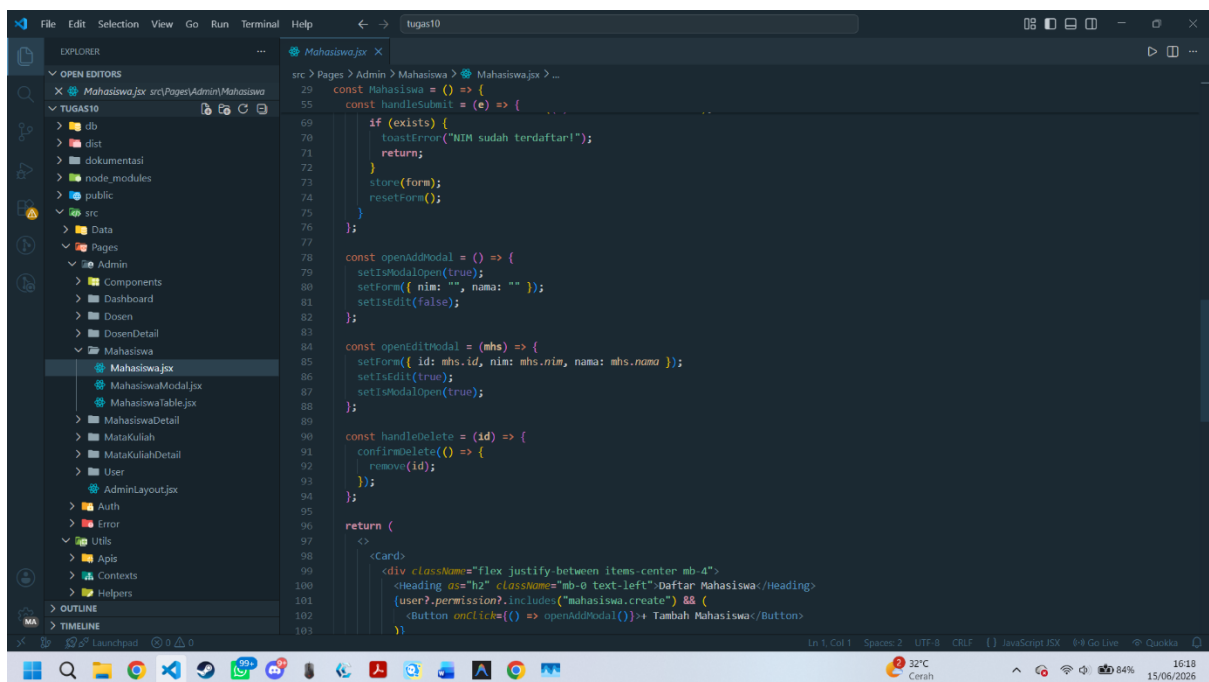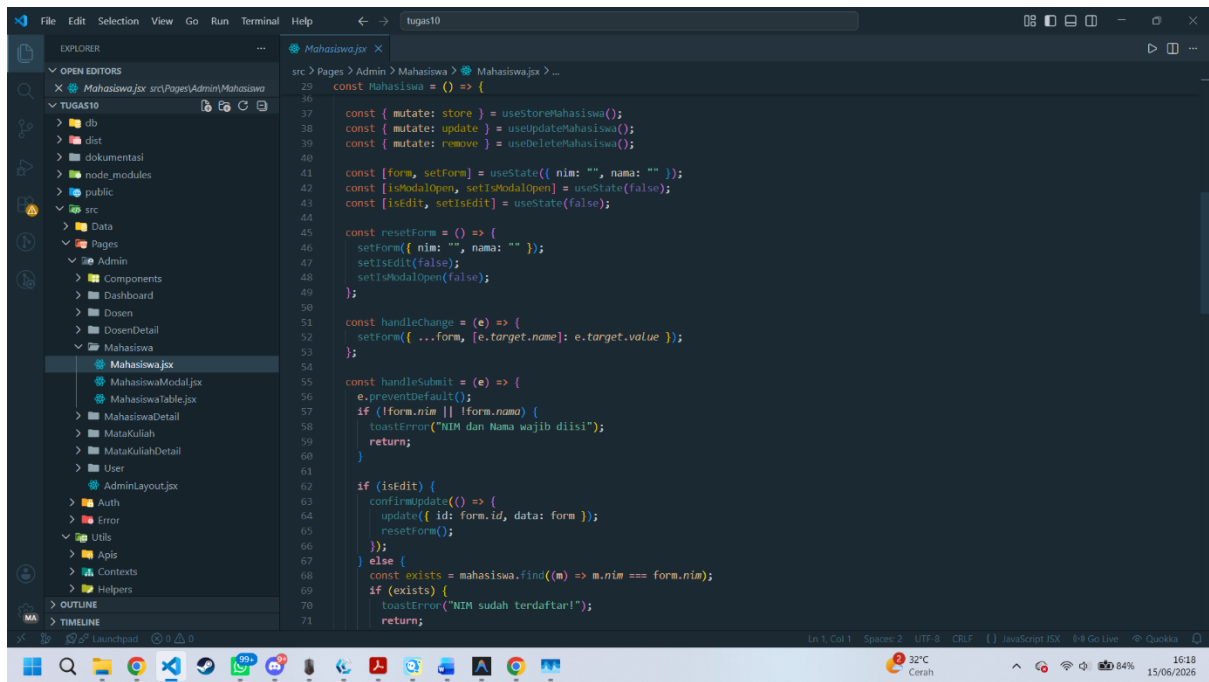

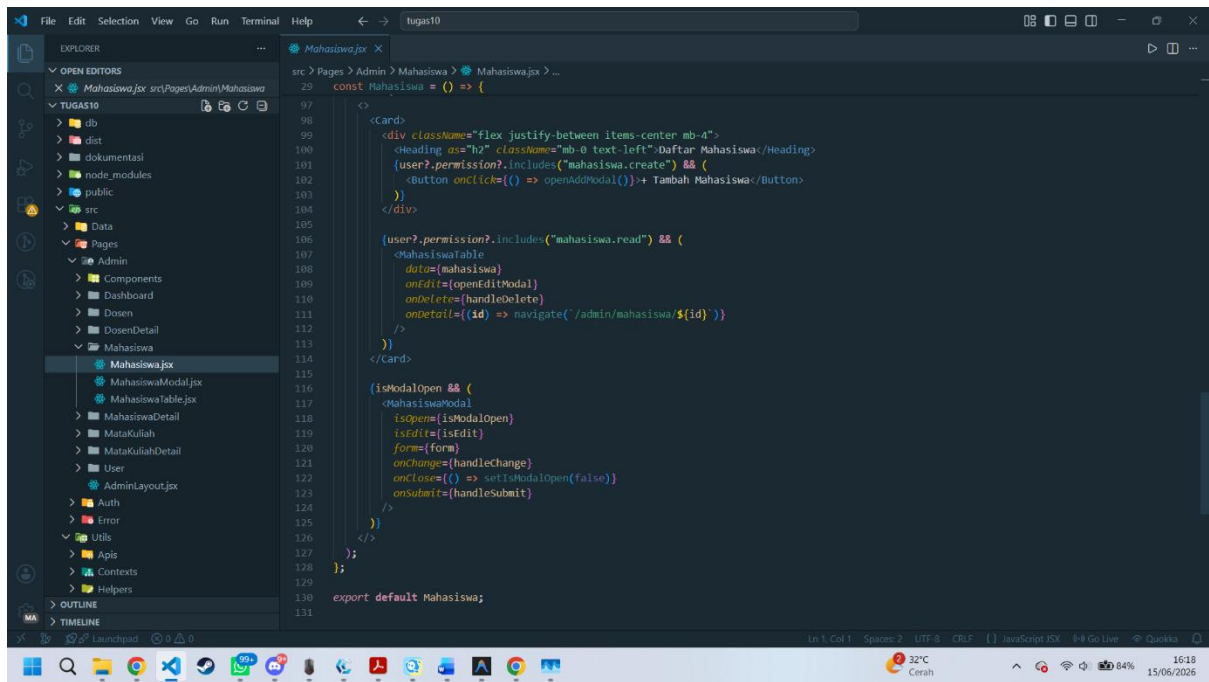

Tampilan

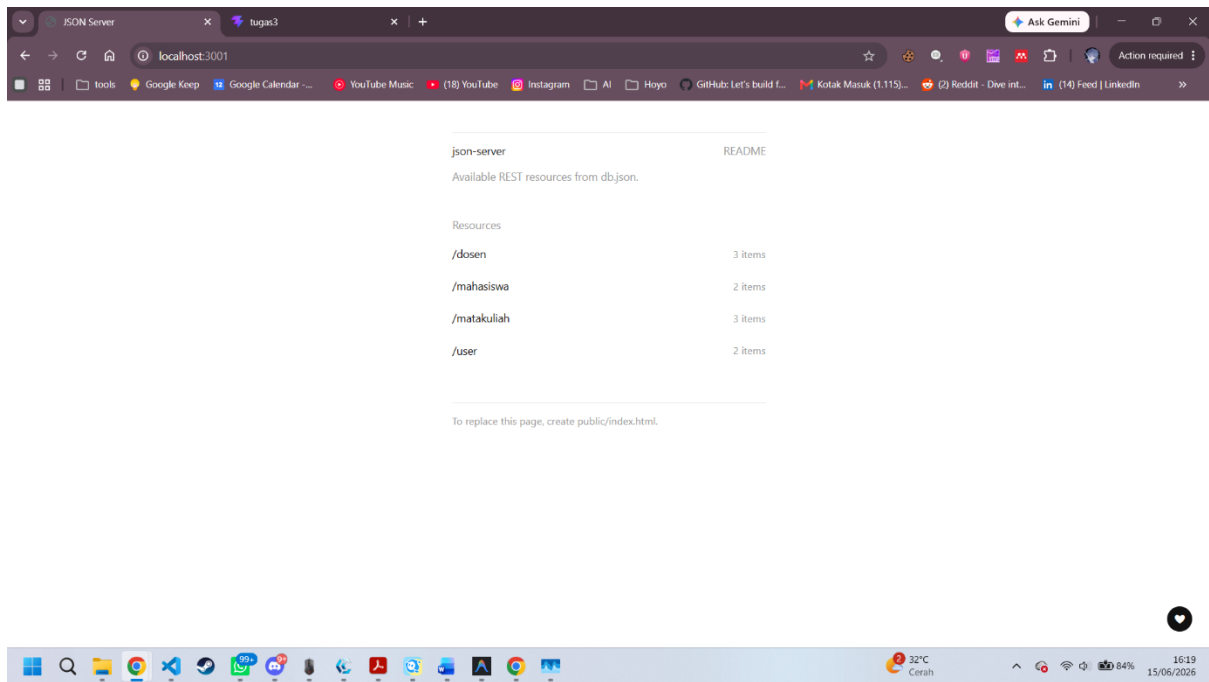

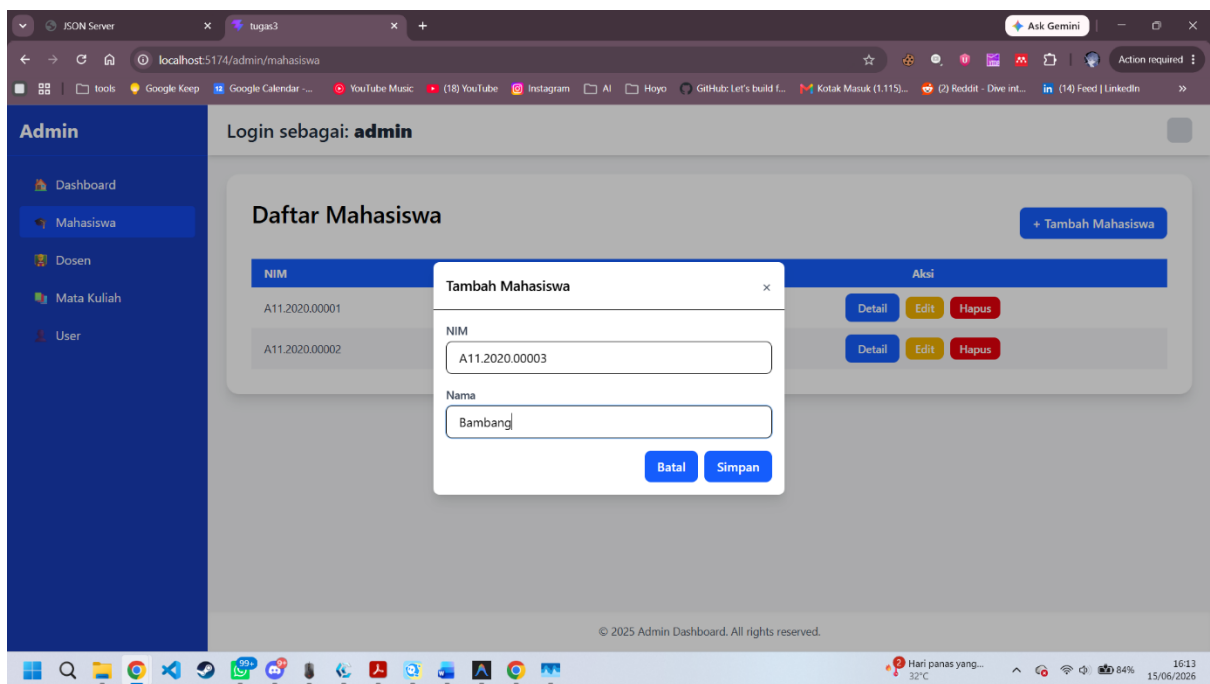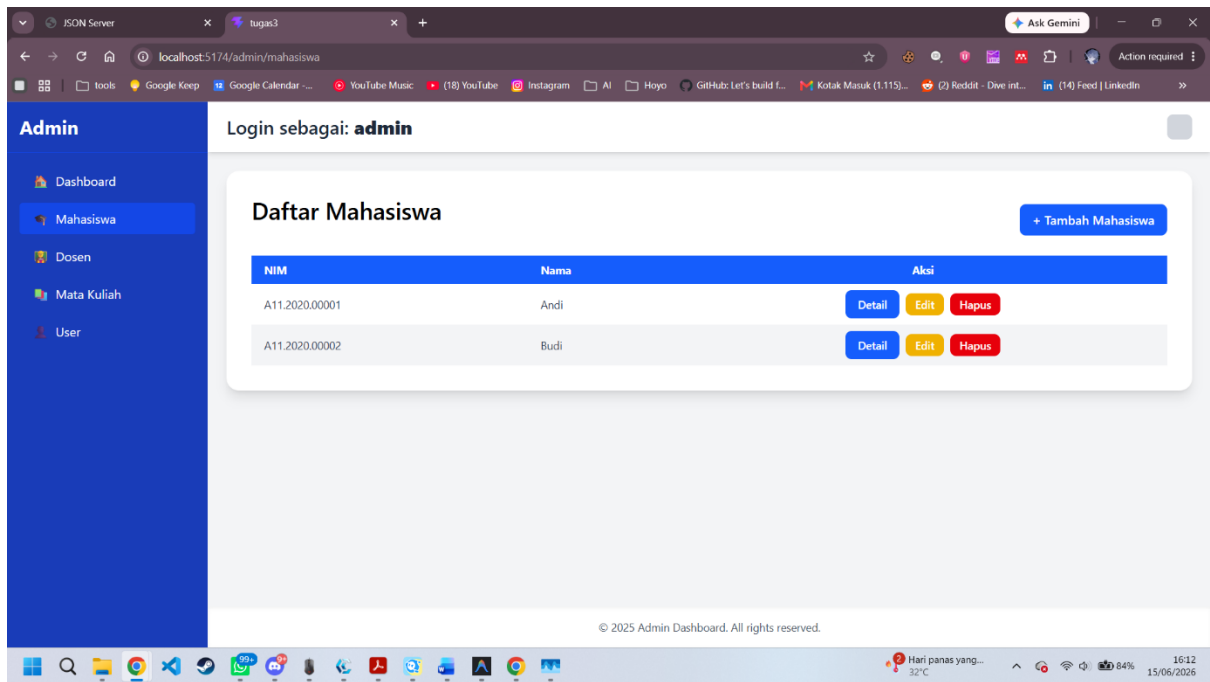

JSON Server

tugas3

Ask Gemini

localhost:5174/admin/mahasiswa

toolsGoogle KeepGoogle Calendar ...YouTube Music(18) YouTubeInstagramAIHoyoGitHub: Let's build f...Kotak Masuk (1.115)...(2) Reddit - Dwe int...in (14) Feed | LinkedIn»

Admin

DashboardMahasiswaDosenMata KuliahUser

Login sebagai: admin

Daftar Mahasiswa

+ Tambah Mahasiswa

NIM	Nama	Aksi
A11.2020.00001	Andi	<button>Detail</button> <button>Edit</button> <button>Hapus</button>
A11.2020.00002	Budi	<button>Detail</button> <button>Edit</button> <button>Hapus</button>
A11.2020.00003	Bambang	<button>Detail</button> <button>Edit</button> <button>Hapus</button>

© 2025 Admin Dashboard. All rights reserved.

Hari panas yang... 32°C16:13 15/06/2026

JSON Server

tugas3

Ask Gemini

localhost:5174/admin/dosen

toolsGoogle KeepGoogle Calendar ...YouTube Music(18) YouTubeInstagramAIHoyoGitHub: Let's build f...Kotak Masuk (1.115)...(2) Reddit - Dwe int...in (14) Feed | LinkedIn»

Admin

DashboardMahasiswaDosenMata KuliahUser

Login sebagai: admin

Daftar Dosen

+ Tambah Dosen

NIDN	Nama	Prodi	Aksi
0012345678	Dr. Ahmad Wijaya, M.Kom	Teknik Informatika	<button>Detail</button> <button>Edit</button> <button>Hapus</button>
0023456789	Siti Nurhaliza, S.Kom, M.T	Sistem Informasi	<button>Detail</button> <button>Edit</button> <button>Hapus</button>
0034567890	Prof. Bambang Hartono, Ph.D	Teknik Informatika	<button>Detail</button> <button>Edit</button> <button>Hapus</button>

© 2025 Admin Dashboard. All rights reserved.

Hari panas yang... 32°C16:13 15/06/2026

JSON Server

tugas3

Ask Gemini

localhost:5174/admin/dosen/3

Admin

Dashboard

Mahasiswa

Dosen

Mata Kuliah

User

Login sebagai: **admin**

Detail Dosen

NIDN

0034567890

Nama

Prof. Bambang Hartono, Ph.D

Program Studi

Teknik Informatika

© 2025 Admin Dashboard. All rights reserved.

Windows Taskbar

System Tray

JSON Server

tugas3

Ask Gemini

localhost:5174/admin/matakuliah

Admin

Dashboard

Mahasiswa

Dosen

Mata Kuliah

User

Login sebagai: **admin**

Daftar Mata Kuliah

+ Tambah Mata Kuliah

Kode	Nama	SKS	Semester	Aksi
A11.44201	Pemrograman Sisi Klien	3	6	DetailEditHapus
A11.44202	Pemrograman Sisi Server	3	6	DetailEditHapus
A11.44203	Basis Data Lanjut	3	5	DetailEditHapus

© 2025 Admin Dashboard. All rights reserved.

Windows Taskbar

System Tray

