




Code elements

in **HTML**



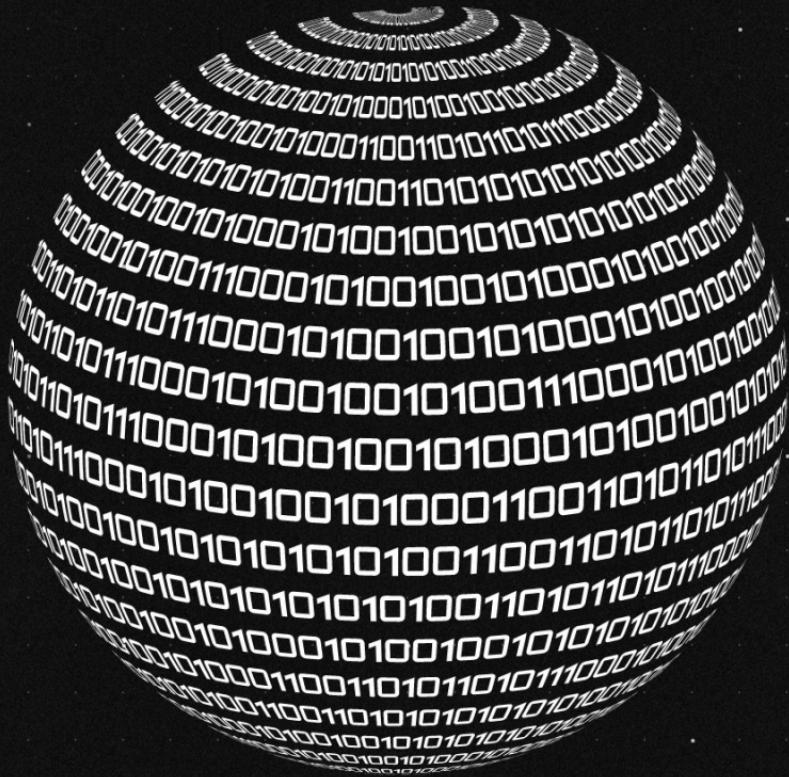

Code element in HTML

The code element can be used to show code in HTML as it is in **Monospace**.

```
<code>  
    a = 8;  
    b = 9;  
    c = a + b;  
</code>
```

```
a = 8; b = 9; c = a + b;
```



output





KBD element in HTML

This element is used to **define keyboard input** which is displayed in the browser's default Monospace



```
<p>  
Copy the content using  
<kbd>Ctrl + c</kbd>  
</p>
```

Copy the content using `ctrl + c`

output:

here the keyboard input "ctrl+c"
is displayed in monospace.



SAMP element in HTML

This element is used to define a **sample output** for a code in HTML.



```
<p><samp>vehicleType = car.<br>Press  
F1 to continue</samp></p>
```

Output:

```
vehicleType = car.  
Press F1 to continue
```

output



Var element in HTML

This element is used to define a variable in **HTML**. The content is displayed in **Italic font**.



```
<p>The area of a triangle is: 1/2 x  
<var>b</var> x <var>h</var>, where  
<var>b</var> is the base, and  
<var>h</var> is the vertical height.  
</p>
```

The area of a triangle is: $1/2 \times b$
 $\times h$, where b is the base, and h
is the vertical height.

output



Swipe →

Pre element in HTML

The pre element is used to display pre-formatted text.

Text in `<pre>` element is displayed in a fixed-width font, and the text preserves both spaces and line breaks.



```
<pre>Subscribe my youtube  
channel. Link is in bio.</pre>
```

Subscribe my youtube channel.
Link is in bio.

output

Do you find it helpful?

let me know down in the
comments !



Slobodan Gajić

Content Creator



FOLLOW FOR MORE