


sd Add a new Bus record. Assume the following information is also provided: bus driver, the hostess, and the vehicle to use

Question 1 Part 4

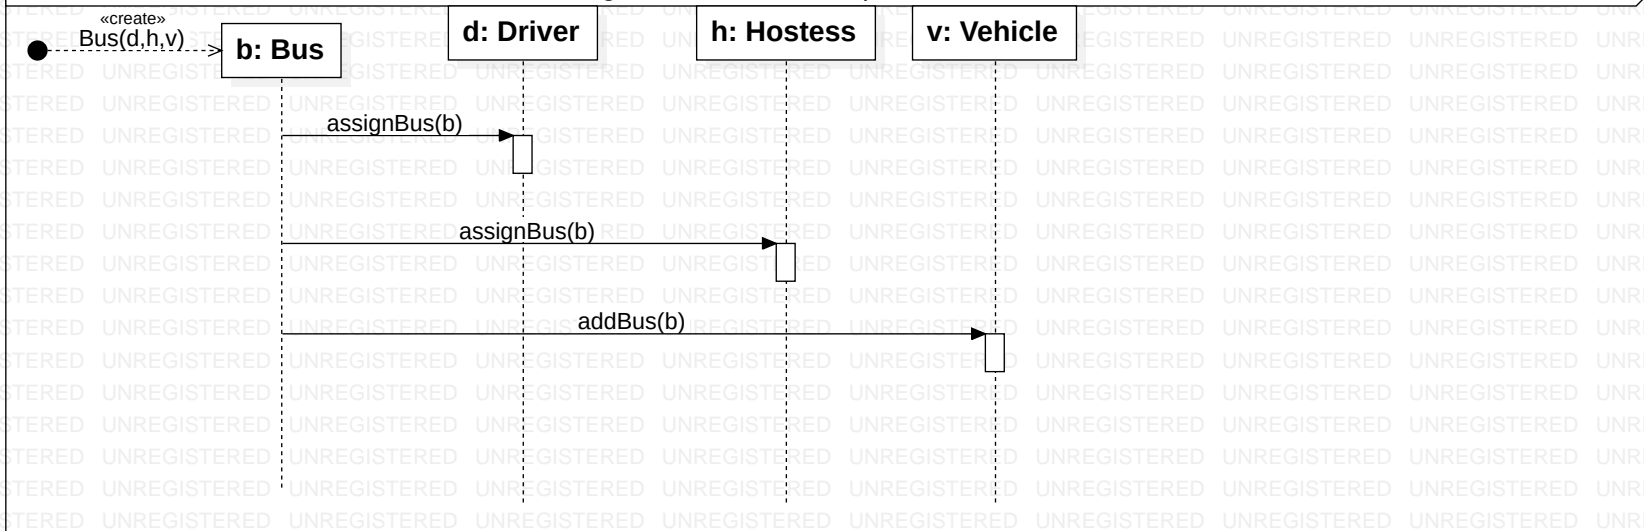

Explanation: To add a new Bus, a call to the Constructor of the Bus Class is made with the Driver object, Hostess object and Vehicle Object passed as arguments. The Constructor of the Bus Class sets its pointers to its Driver object, Hostess Object and its Vehicle Object. The Constructor then calls **assignBus(b)** function of the Driver object so that the Driver object can point to the Bus object. The Constructor then calls **assignBus(b)** function of the Hostess object so that the Hostess object can point to the Bus object. The Constructor then calls the **addBus(b)** function of the Vehicle object so that the Vehicle object can point to the Bus object.