
Community SH

Community SH Manual

Step-by-step guide to the panel that deploys and manages Odoo

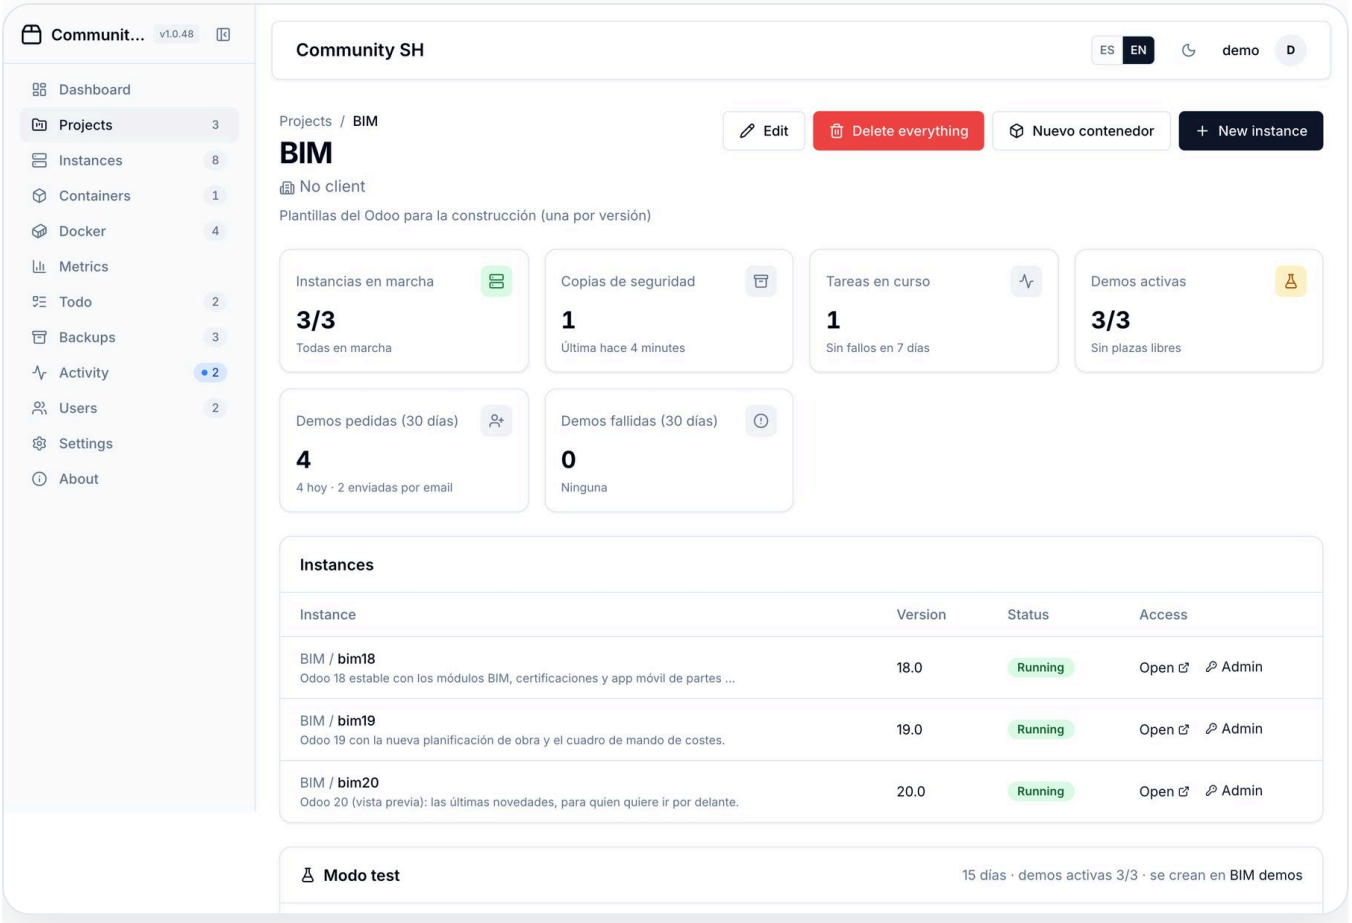

v1.0.48 · November 04, 2026 · https://communitysh.xyz

Contents

01 What Community SH is

02 Signing in

03 Dashboard

04 Projects

05 Creating an Odoo instance

06 Working with an instance

07 Backups

08 Activity and background tasks

09 Demos for clients: test mode

10 What your client sees

11 Demo API (for your website)

12 Metrics and Todo

13 Settings

14 Security: good practices

01 What Community SH is

Community SH is an open source web panel to deploy and manage Odoo instances (versions 8 to 20) and other Docker applications on your own server. Each instance has its own PostgreSQL database, its HTTPS subdomain and its backups, all handled from the browser.

1. Open the home page (`https://communitysh.xyz`): it shows the features, how to install it and the release notes.
2. Download this manual from the «Manual» section of the home page, in Spanish or English.
3. Click «Go to the panel» to sign in.

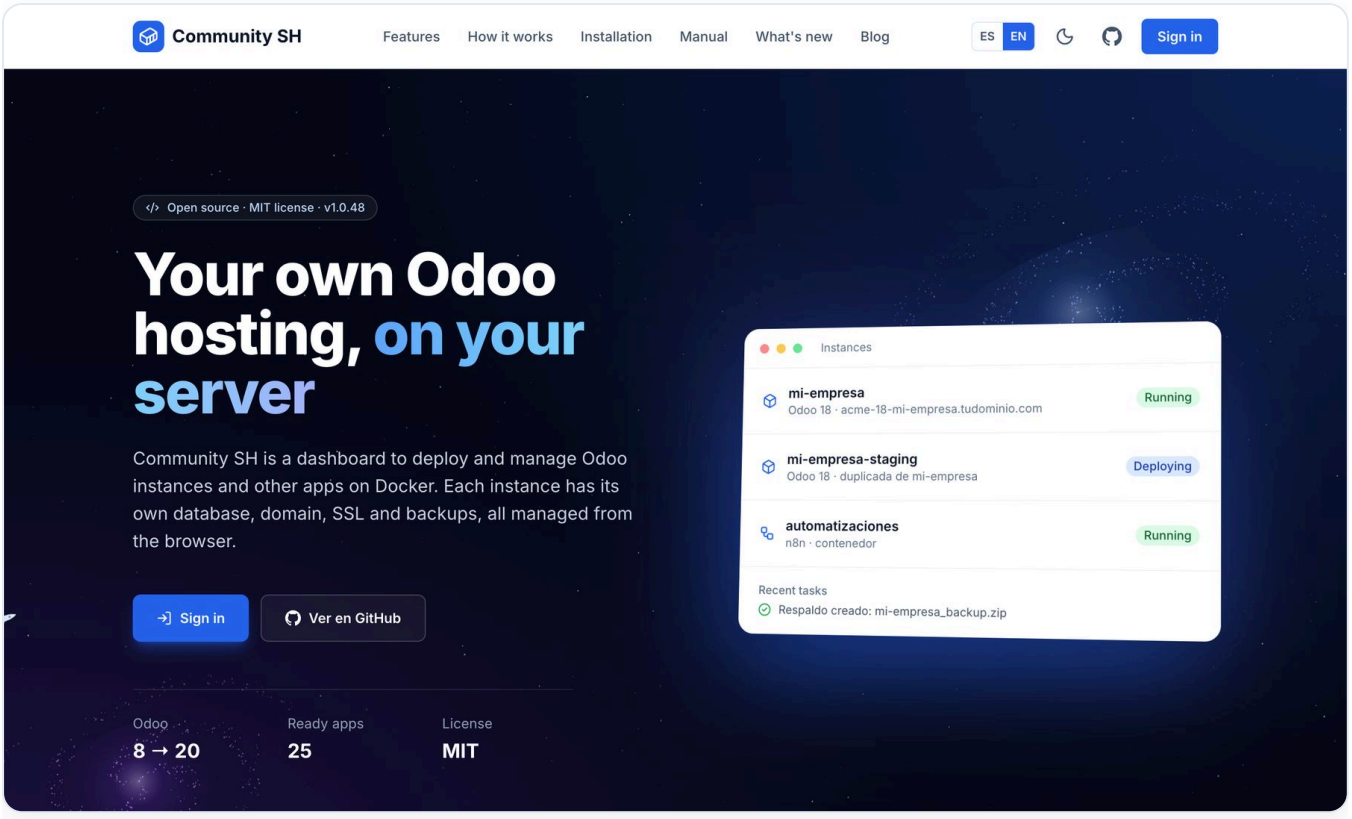


Figure 1. Community SH home page

02 Signing in

You sign in with a username and password. The administrator can require two-step verification (2FA) for everyone.

1. Open `/accounts/login/` and type your username and password.
2. With 2FA enabled, type the 6-digit code of your authenticator app (Google Authenticator, Authy, 1Password…).
3. After several failed attempts the account is locked for a few minutes: a protection against brute-force attacks.
4. From your profile (top right) you change your password, the language (ES/EN), the light or dark theme and enable 2FA.

> **Tip:** Enable 2FA in your profile, above all if you administer the server.

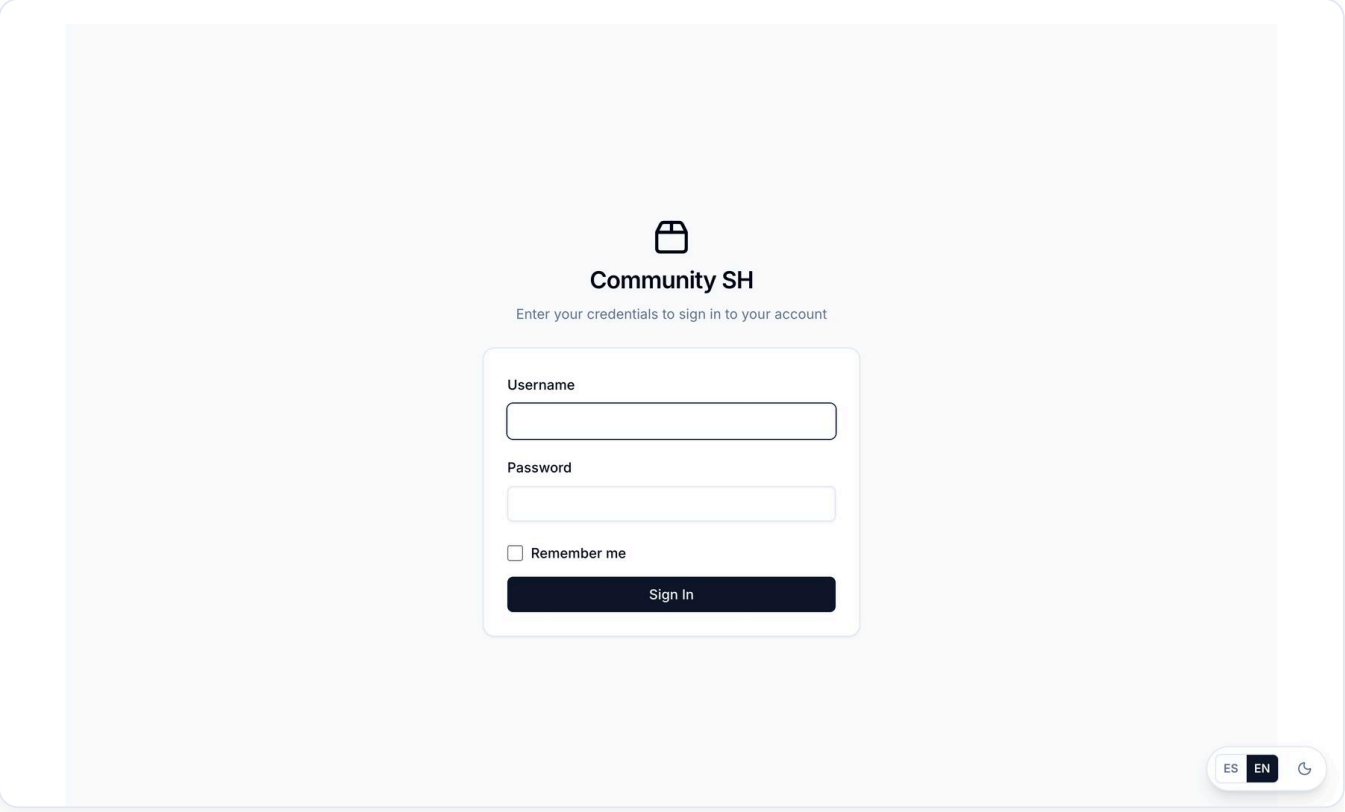


Figure 2. Sign-in page

03 Dashboard

The first menu gathers the key figures of Community SH. Every card links to its page.

1. Platform: projects, running instances, containers, backups (and how long ago the last one was) and tasks running or failed.
2. Demos: active, asked for today against the daily limit, asked for in 30 days, expiring in 3 days and failed.
3. Server and security (administrators): CPU, memory, disk, users without 2FA, outgoing mail and the team's pending tasks.
4. Below: the demos that expire first, the instances with errors and the latest tasks.
5. Colours warn you: amber when something needs attention and red when there are errors.

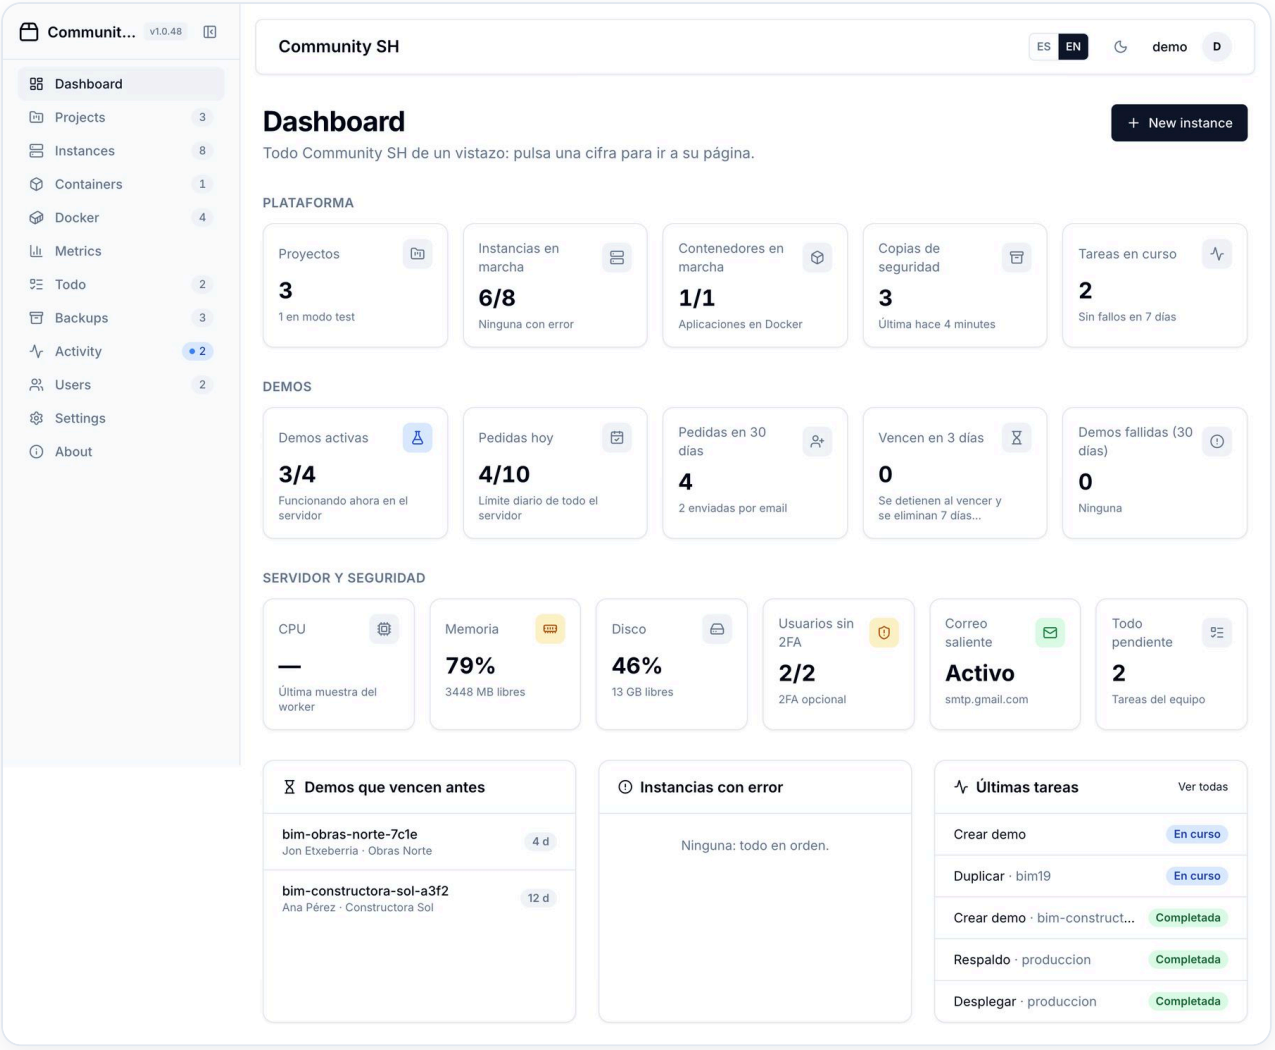


Figure 3. Dashboard with the KPIs of the whole platform

04 Projects

A project groups the instances of a client or an initiative (production, staging, migration…). When the project has a client, that user only sees and operates its instances.

1. Open «Projects» in the sidebar: each project shows its client and how many instances are running.
2. Click «New project», type the name and a description.
3. As an administrator, choose the client (a user) who will see it. A client can start, deploy and back up, but not delete or change the configuration.
4. Click «Create project». From its page you create instances («New instance») and Docker containers («New container»), edit it or delete it.
5. At the top of the page you see its KPIs: running instances, backups, containers, tasks and, in test mode, its demos.

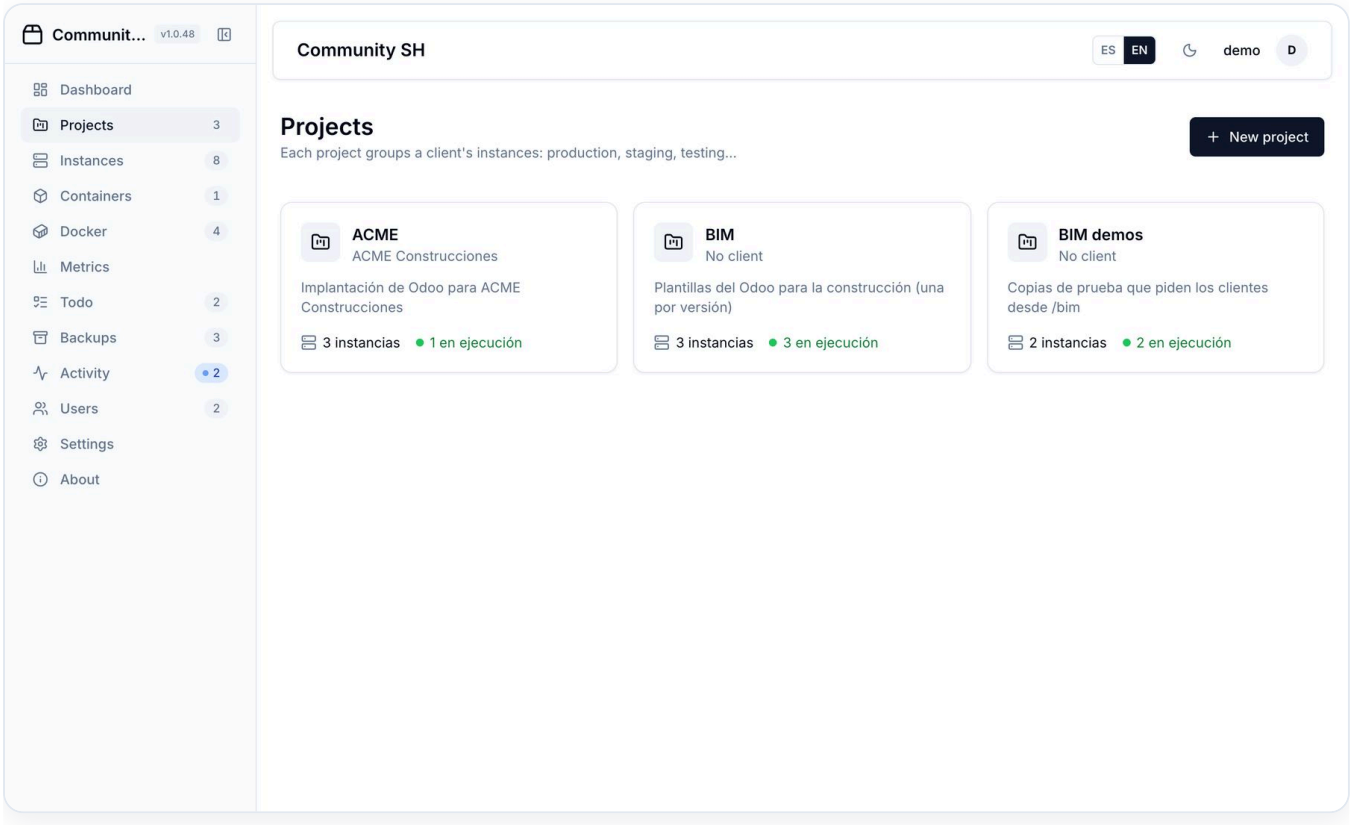


Figure 4. Project list

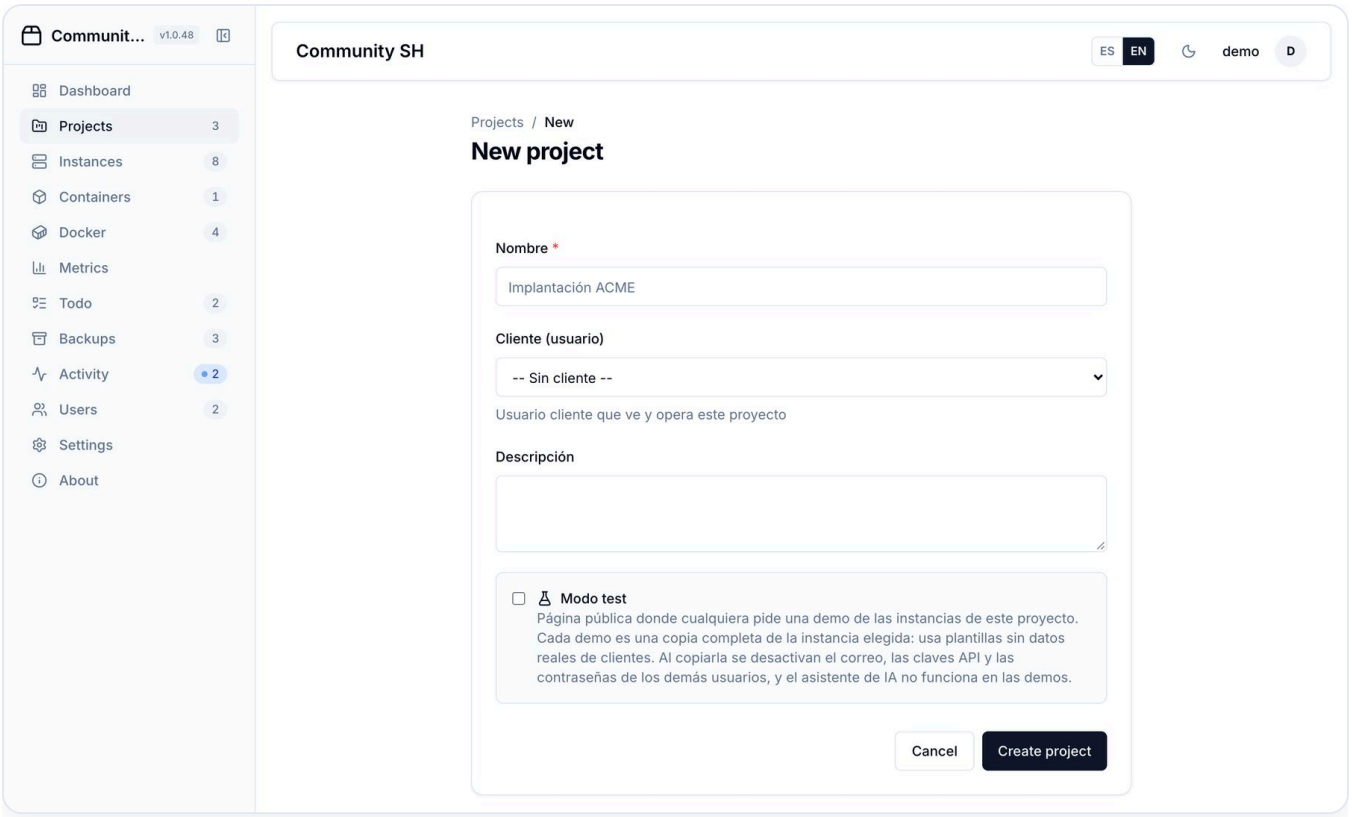


Figure 5. New project

05 Creating an Odoo instance

An instance is an Odoo with its own PostgreSQL database, its modules and its web address.

1. In the project, click «New instance».
2. Type the name (lowercase letters, digits and hyphens) and choose the Odoo version.
3. Optional: a GitHub repository and branch with your modules. Private ones work with the GitHub token of Settings.
4. Optional: a custom domain (point its DNS to the server) and a description, used on the demo page.
5. Click «Create». The deployment runs in the background and its progress is shown in «Activity». When it ends, the instance answers at `https://client-version-name.yourdomain` with a certificate.

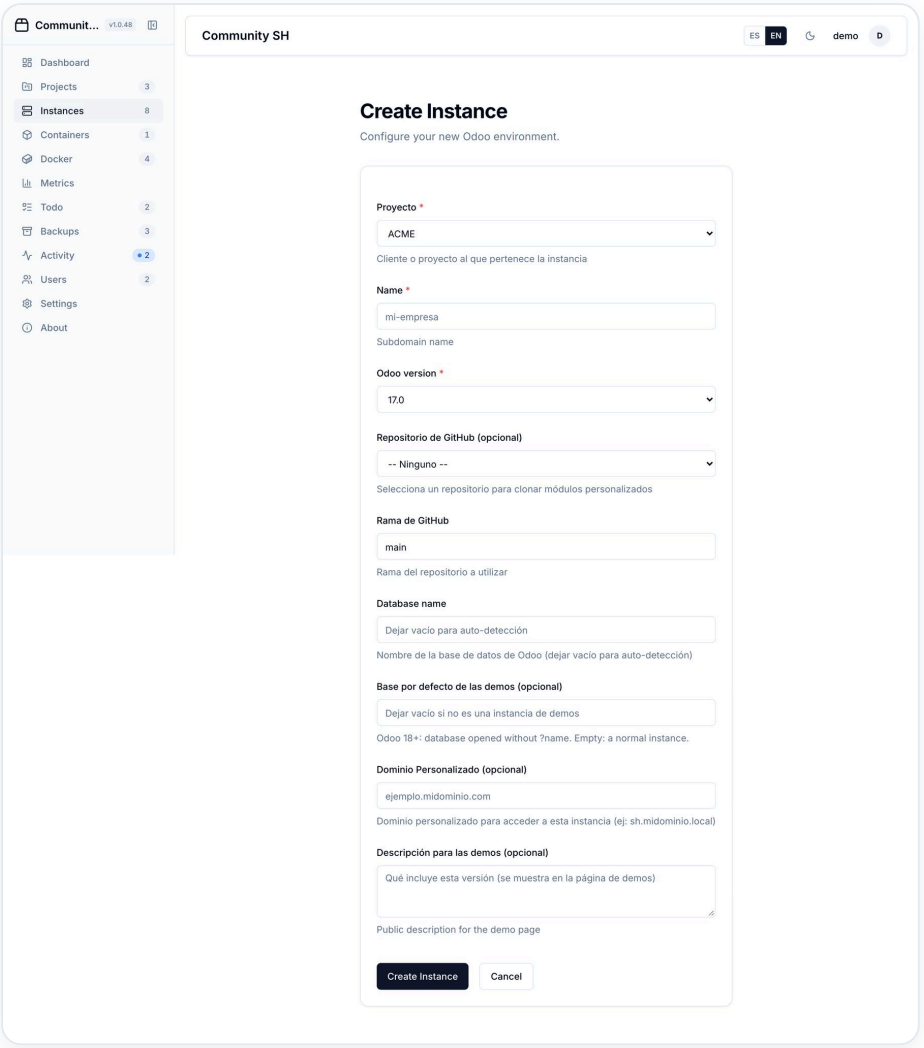


Figure 6. New instance form

06 Working with an instance

The instance page gathers everything you can do with it, in tabs.

1. Information: status, main URL, version, master password (for the Odoo database manager) and where the code comes from.
2. Top buttons: Deploy, Restart, Stop, Duplicate, «Admin» (opens Odoo as its administrator through a signed one-time link) and Delete.
3. Logs and Console: live Odoo logs and a console to run commands inside the container.
4. Domains: custom domain and certificate. Modules: install a ZIP, «Pull» the repositories, requirements.txt and a browser for WhatsApp Web.
5. Backups: create, download and restore. Migrate: bring data from another Odoo. AI: the assistant that creates and changes modules.
6. Description (demos): the text shown next to the instance on the demo page of its project.

> **Tip:** Each instance has its own master password: do not share it with Odoo users.

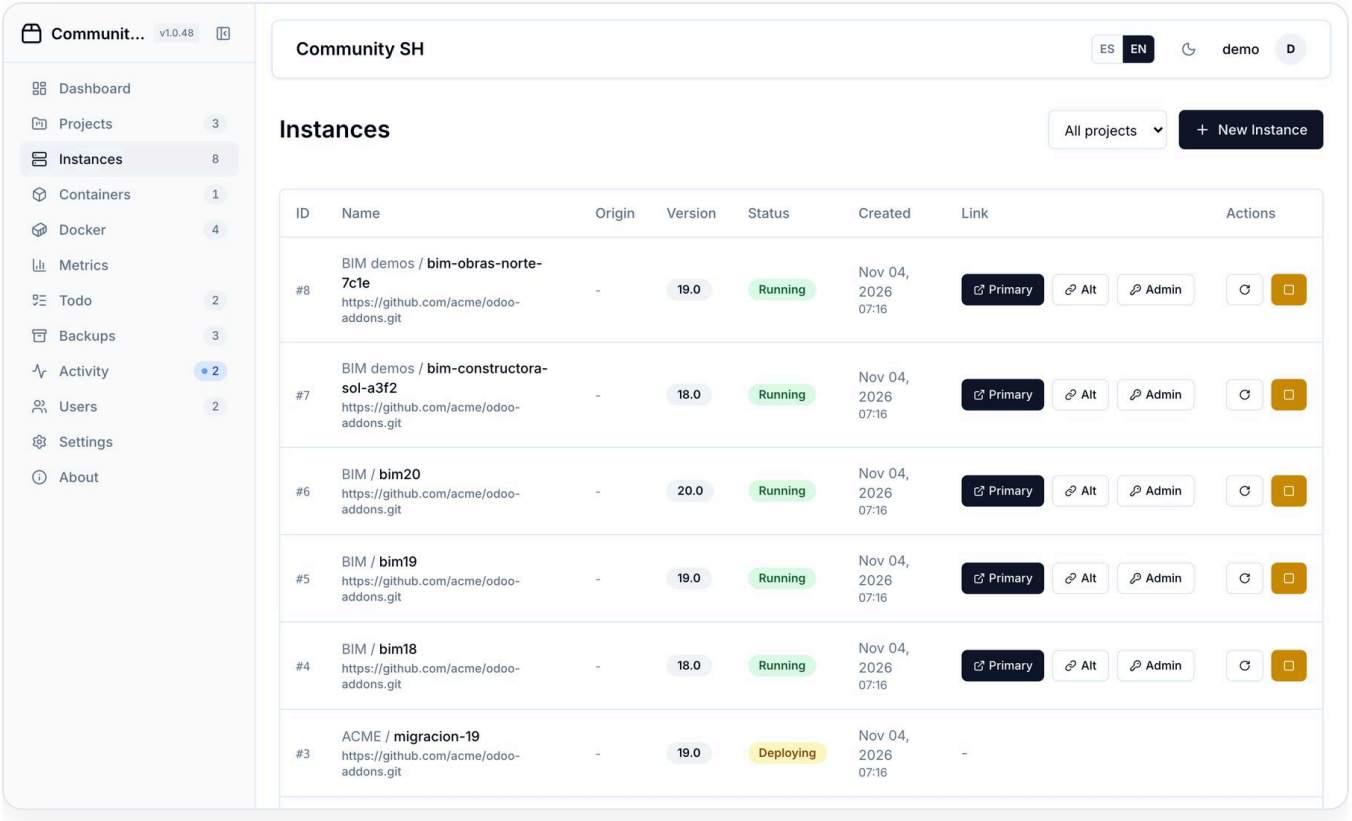


Figure 7. Instance list

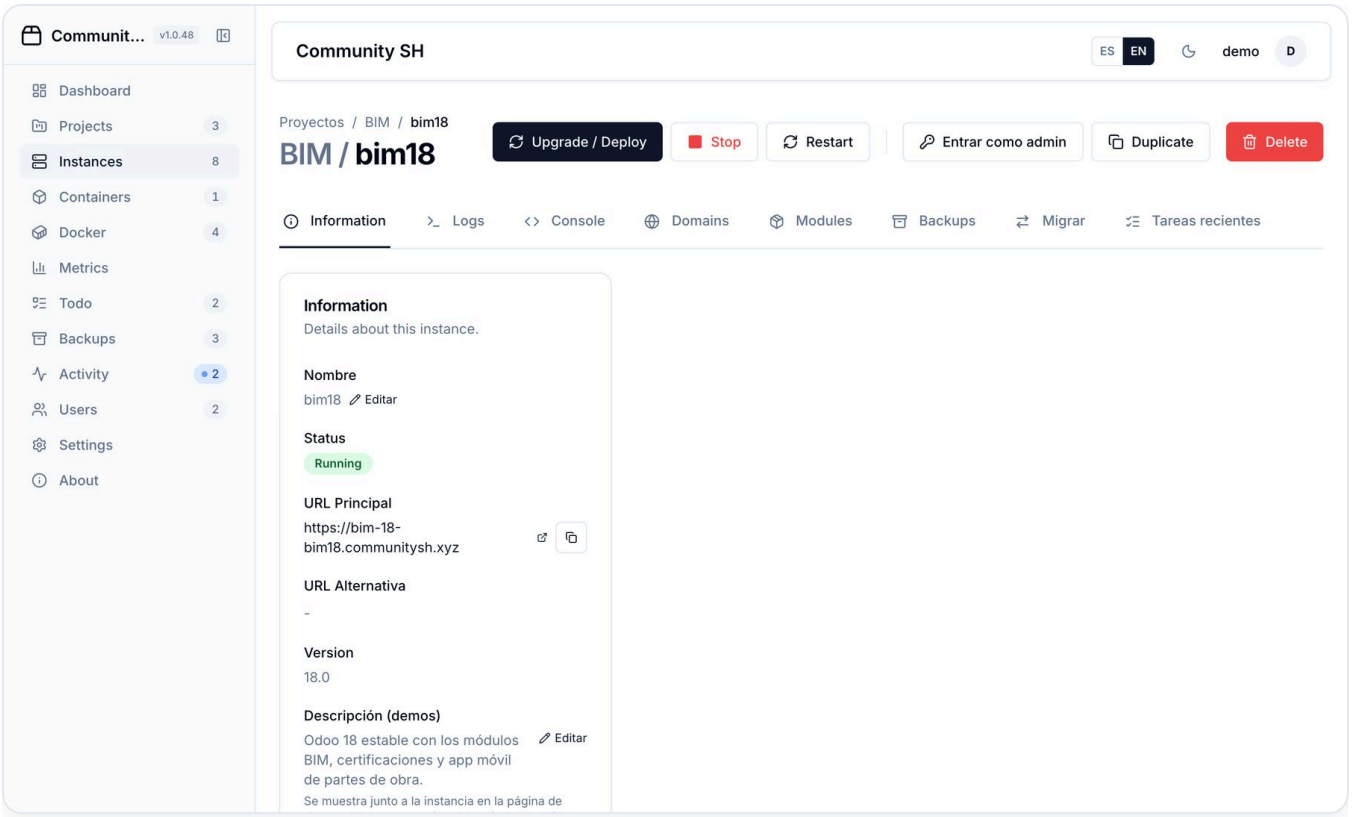


Figure 8. Instance page

07 Backups

Backups hold the database and, if you want, the filestore (attachments). An instance with several databases keeps one backup of each.

1. Open «Backups» to see every backup with its instance, size and date.
2. On an instance page click «Create backup».
3. Download a backup, restore it over the instance or create a new instance from it.
4. «Import a backup» accepts Odoo database manager backups (.zip with dump.sql and filestore) and .dump files.
5. Settings schedules automatic backups and how many to keep.

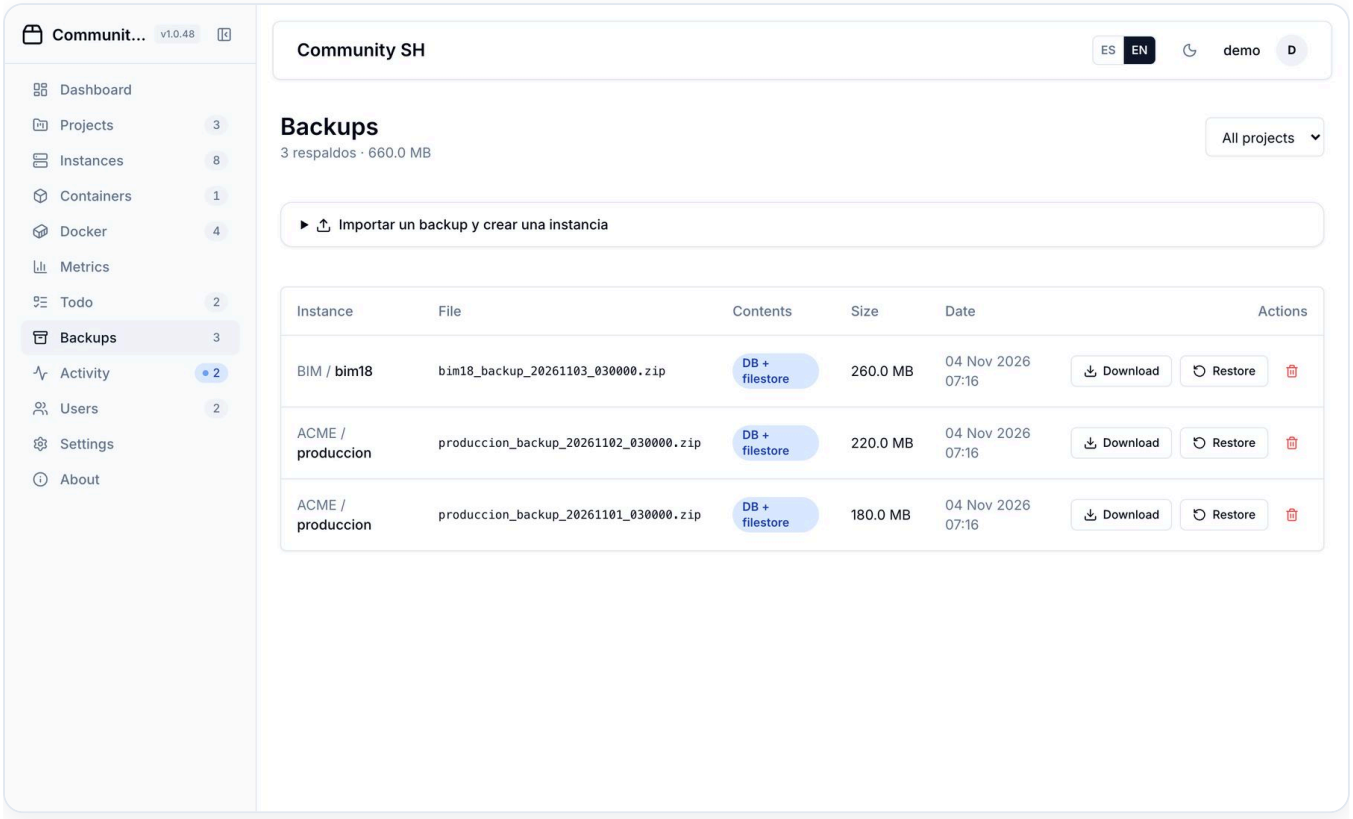


Figure 9. Backup list

08 Activity and background tasks

Long operations (deploy, duplicate, copy, restore, build demos…) run in a worker, so the panel never waits on them.

1. Open «Activity» to see every task, filtered by status, kind and instance.
2. Each task shows a progress bar with the current step and its full timestamped log.
3. When a task fails, its log explains why.

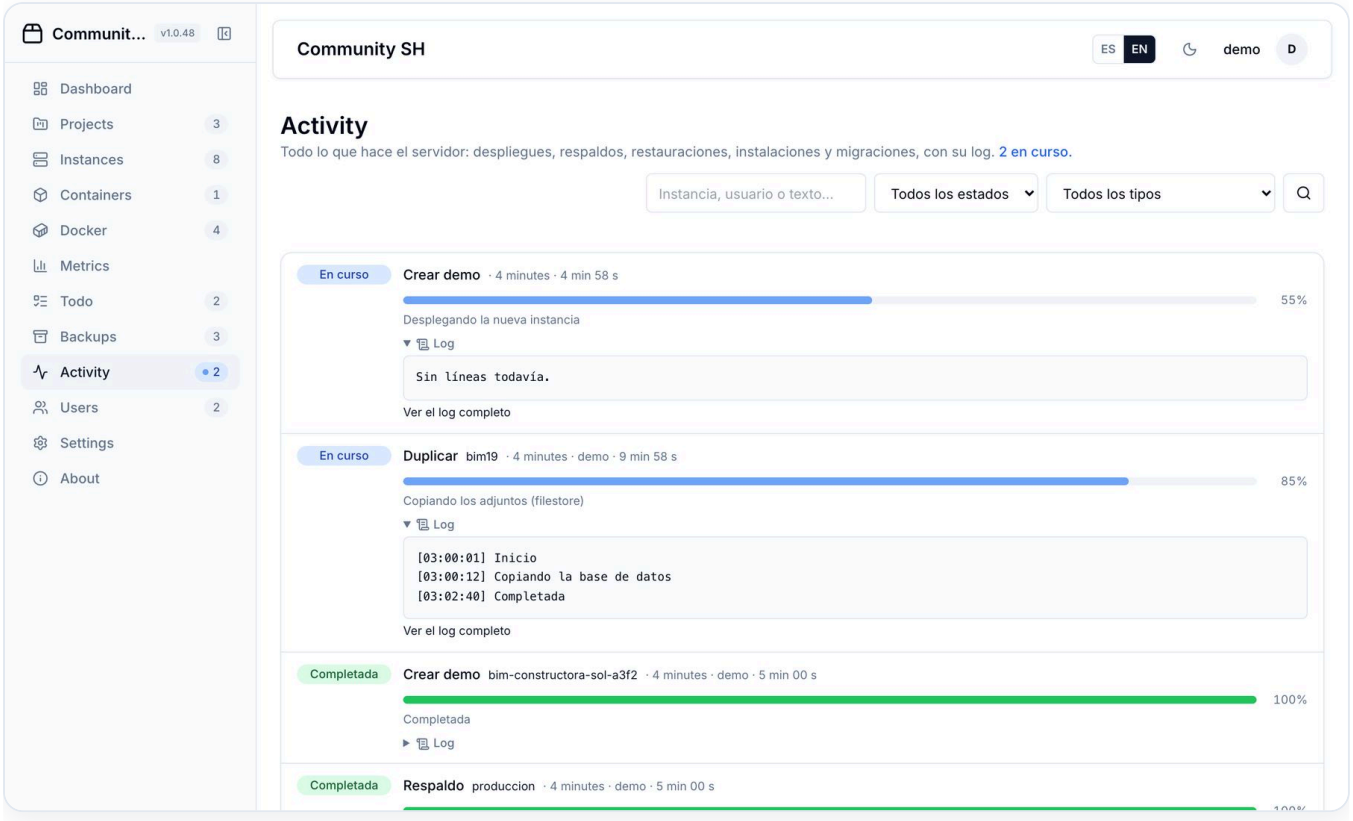


Figure 10. Activity: tasks and their progress

09 Demos for clients: test mode

Test mode publishes a page where anyone asks for a demo of your Odoo in the version they want. They get their own copy in another project, with an administrator password just for them, for the days you choose.

1. Create two projects: one with the template instances (e.g. «BIM», with bim18, bim19 and bim20 running) and an empty one that will hold the demos («BIM demos»).
2. Write the description of each template instance on its page: it is what clients read when choosing the version.
3. Edit the template project and enable «Test mode». Set the URL (e.g. bim → `https://communitysh.xyz/bim`), the trial days (15 by default), the sibling project for the demos, the text for the user and how many demos can run at once.
4. Save. The project page now shows the «Test mode» card with the public page, the API and the demos asked for (with job title, country and whether they were emailed).
5. In Settings → Demos set how many demos can be asked for per day (10 by default) and how many can run at once on the whole server. In Settings → Email, the mail server that sends the credentials to the client.
6. Each demo's page shows how many days it has left until it is stopped and deleted.

> **Tip:** Each demo is an Odoo with its PostgreSQL. Set «Demos at once» to what your server memory allows.

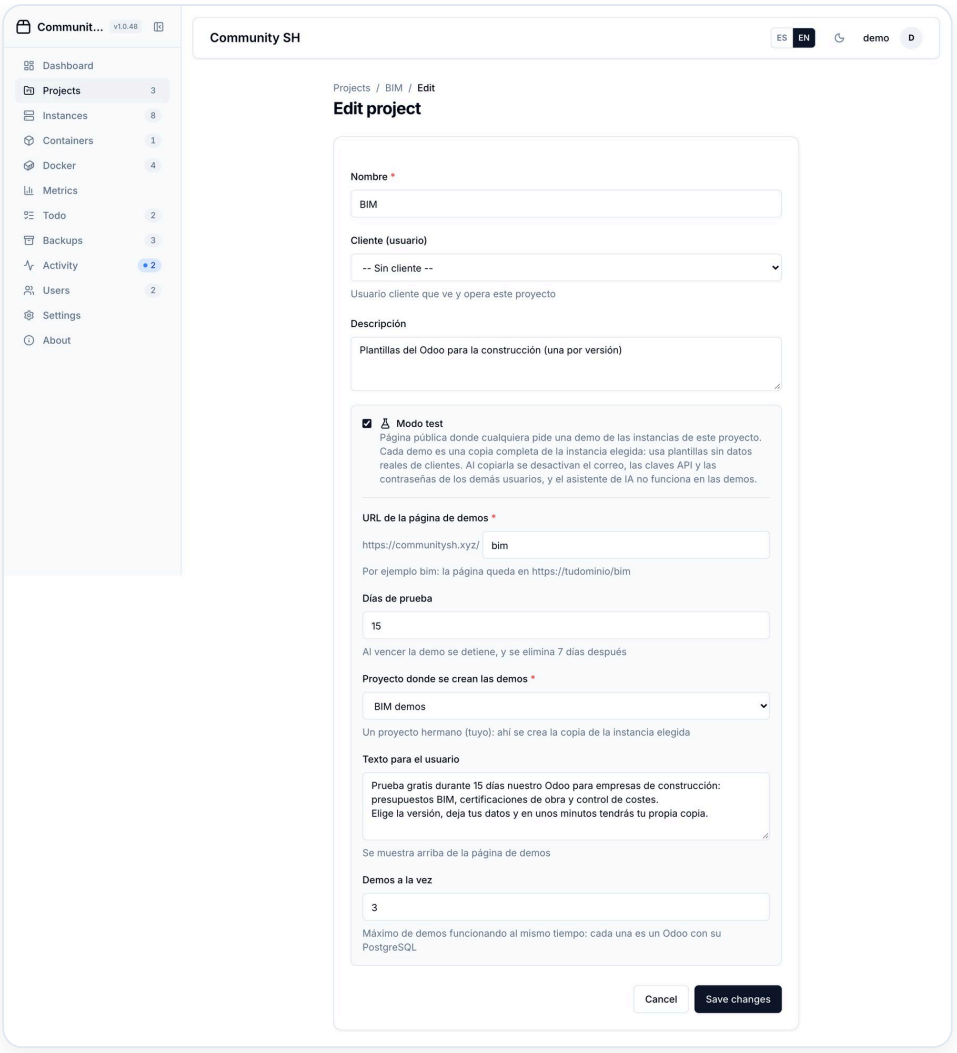


Figure 11. Enabling test mode on the project

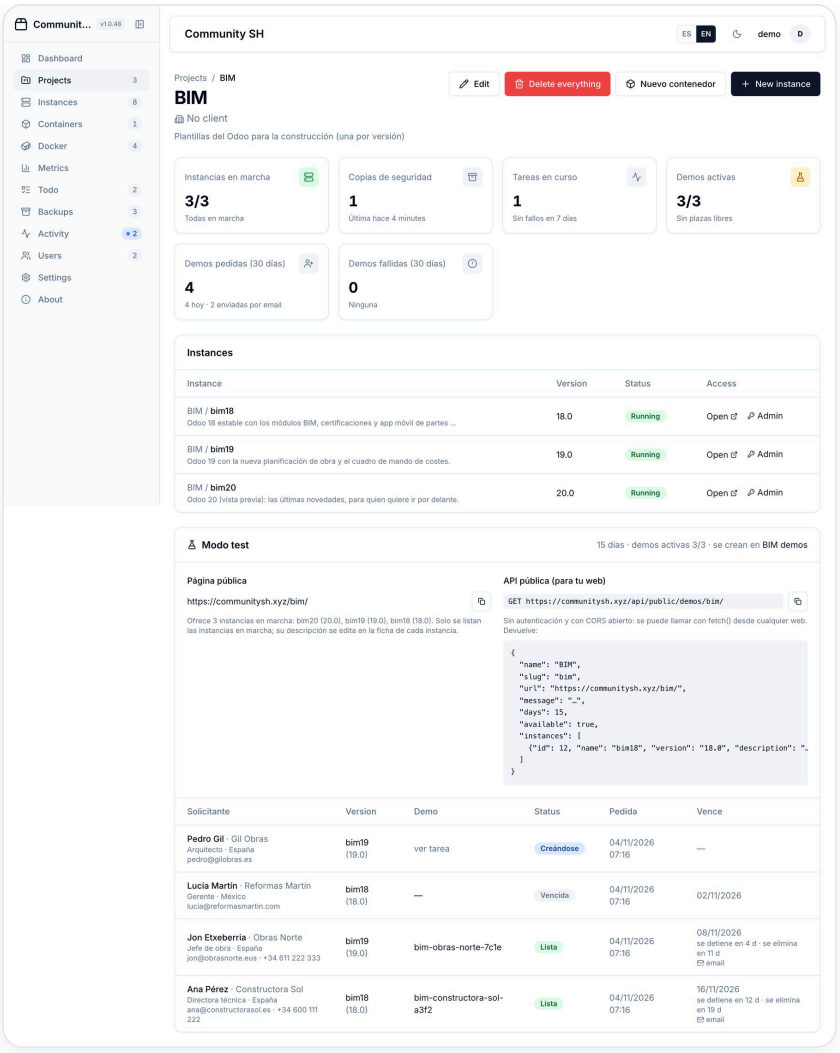


Figure 12. «Test mode» card: public page, API and demos

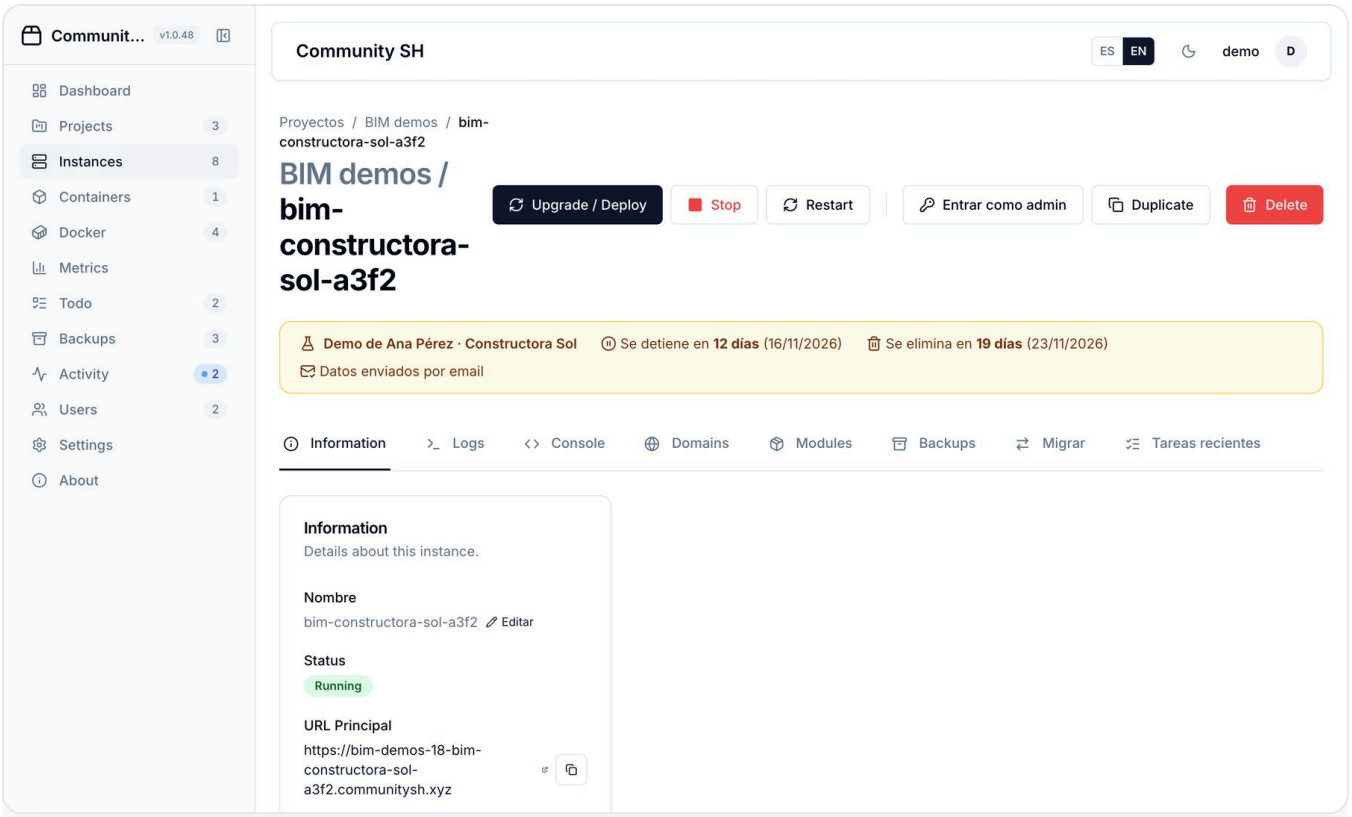


Figure 13. A demo: days until it is stopped and deleted

10 What your client sees

Your client needs no panel account: only the address of the demo page.

1. They open `https://communitysh.xyz/bim`, read the text and choose the version to try.
2. They type their name, email, company, job title, phone and country, solve the check sum (our own captcha) and click «Create my demo».
3. While the copy is built they see a progress bar with the current step. It usually takes a few minutes.
4. At the end they see the address of their Odoo, the username and the password, with copy buttons. With outgoing mail on, they also get them by email.
5. One demo per email a month. When it expires the demo is stopped, and deleted 7 days later.

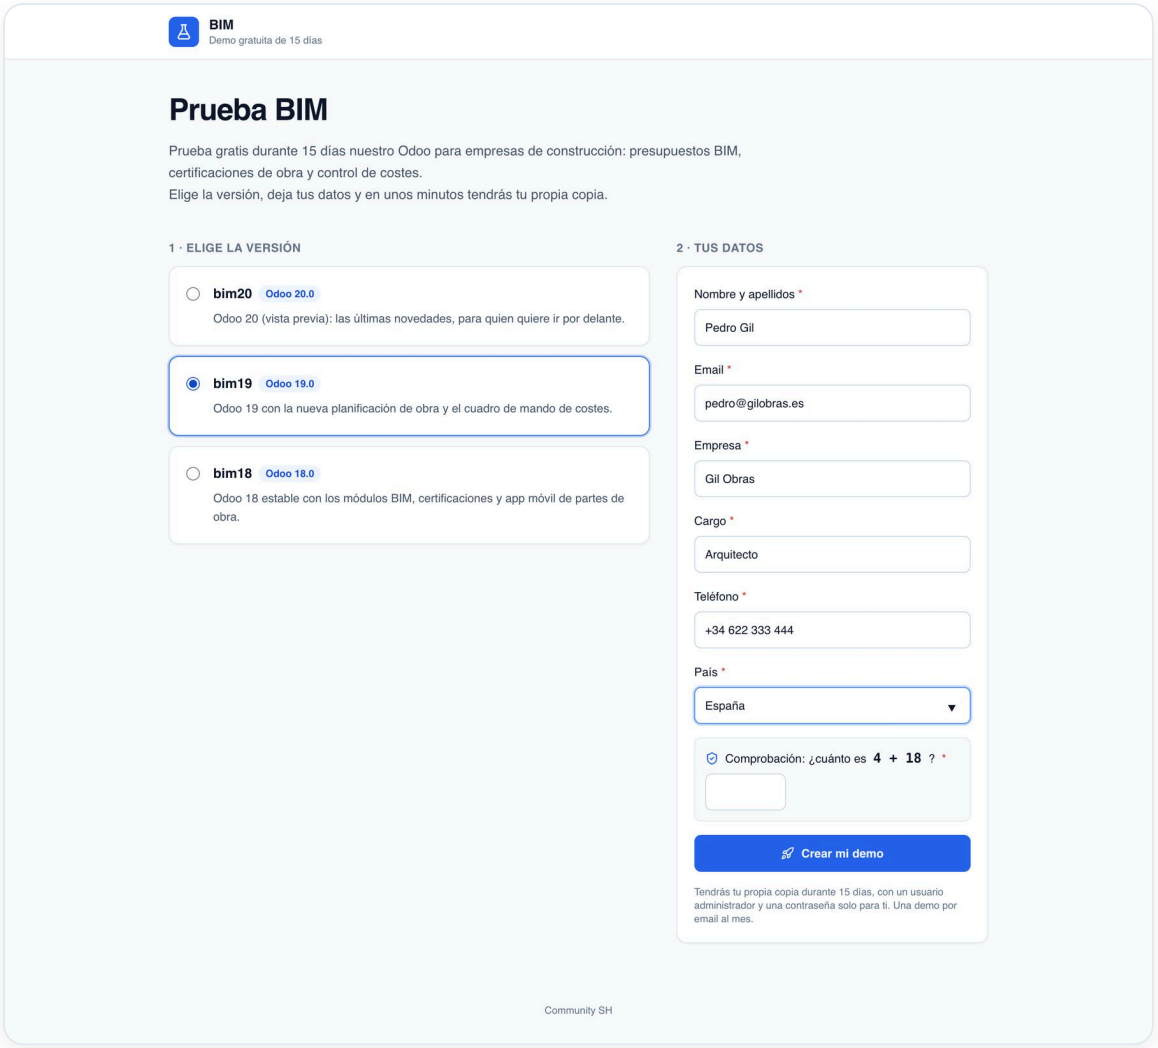


Figure 14. Public demo page

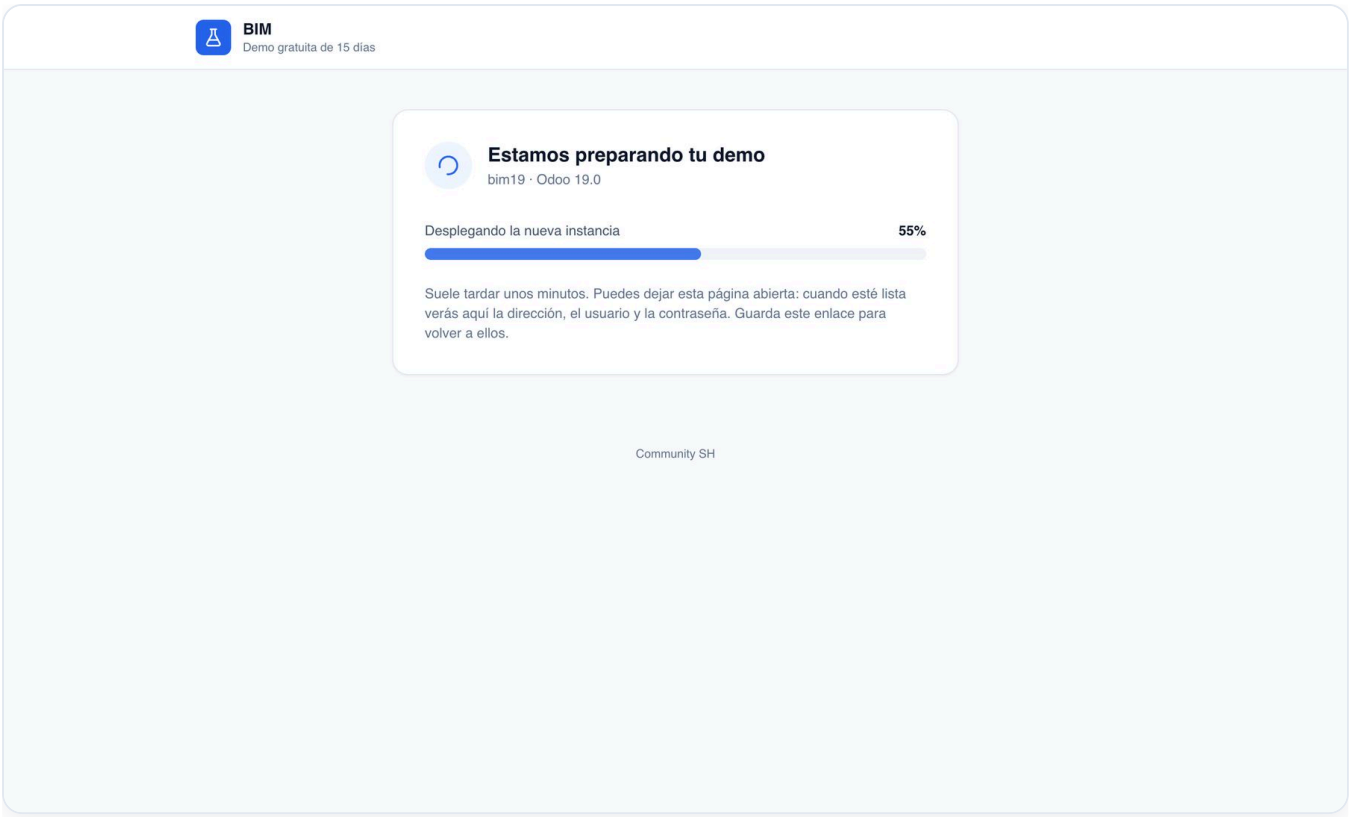


Figure 15. The demo is being built

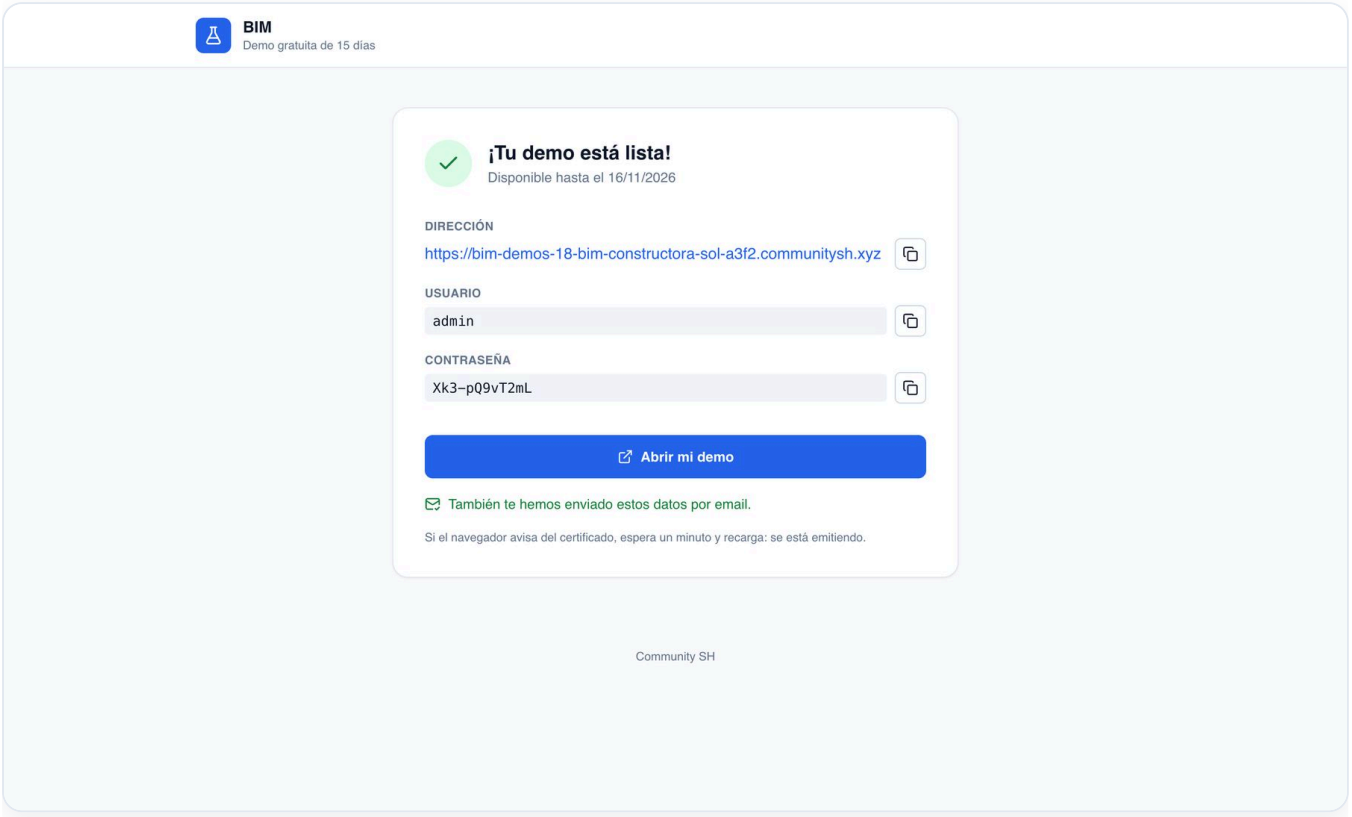


Figure 16. Demo ready with its credentials

11 Demo API (for your website)

Your website can list the versions and ask for demos without the page. The public API needs no token and accepts requests from any domain (CORS).

1. List: GET `https://communitysh.xyz/api/public/demos/bim/` returns the text, the days, whether places are left («available») and the instances with their version and description.
2. Get a sum: GET `https://communitysh.xyz/api/public/demos/bim/captcha/` returns the question («7 + 4») and its token.
3. Ask for the demo: POST `https://communitysh.xyz/api/public/demos/bim/` with instance, name, email, company, job_title, phone, country, captcha_token and captcha_answer. It returns status_page and status_api.
4. Follow it: GET status_api returns the progress and, at the end, the address, username, password and days left.
5. From your server, with a personal token: POST `/api/demos/` with the same data and the project (no captcha, same limits); GET `/api/demos/{id}/` for its state.

GET https://communitysh.xyz/api/public/demos/bim/ 200 OK · Access-Control-Allow-Origin: *


```
{
  "name": "BIM",
  "slug": "bim",
  "url": "https://communitysh.xyz/bim/",
  "message": "Prueba gratis durante 15 días nuestro Odoo para empresas de construcción: presupuestos BIM, certificaciones de obra y control de costes.\nElige la versión, deja tus datos y en unos minutos tendrás tu propia copia.",
  "days": 15,
  "available": false,
  "instances": [
    {
      "id": 6,
      "name": "bim20",
      "version": "20.0",
      "description": "Odoo 20 (vista previa): las últimas novedades, para quien quiere ir por delante."
    },
    {
      "id": 5,
      "name": "bim19",
      "version": "19.0",
      "description": "Odoo 19 con la nueva planificación de obra y el cuadro de mando de costes."
    },
    {
      "id": 4,
      "name": "bim18",
      "version": "18.0",
      "description": "Odoo 18 estable con los módulos BIM, certificaciones y app móvil de partes de obra."
    }
  ],
  "fields": [
    "name",
    "email",
    "company",
    "job_title",
    "phone",
    "country",
    "instance"
  ]
}
```


Figure 17. Public API response

12 Metrics and Todo

Metrics shows the server CPU and memory use; Todo, the team’s pending tasks.

1. Metrics: live use and the history of 24 hours, 7 days, 30 days and 12 months (average and peak).
2. Todo: create tasks, mark them in progress or done and note what was done and in which version.

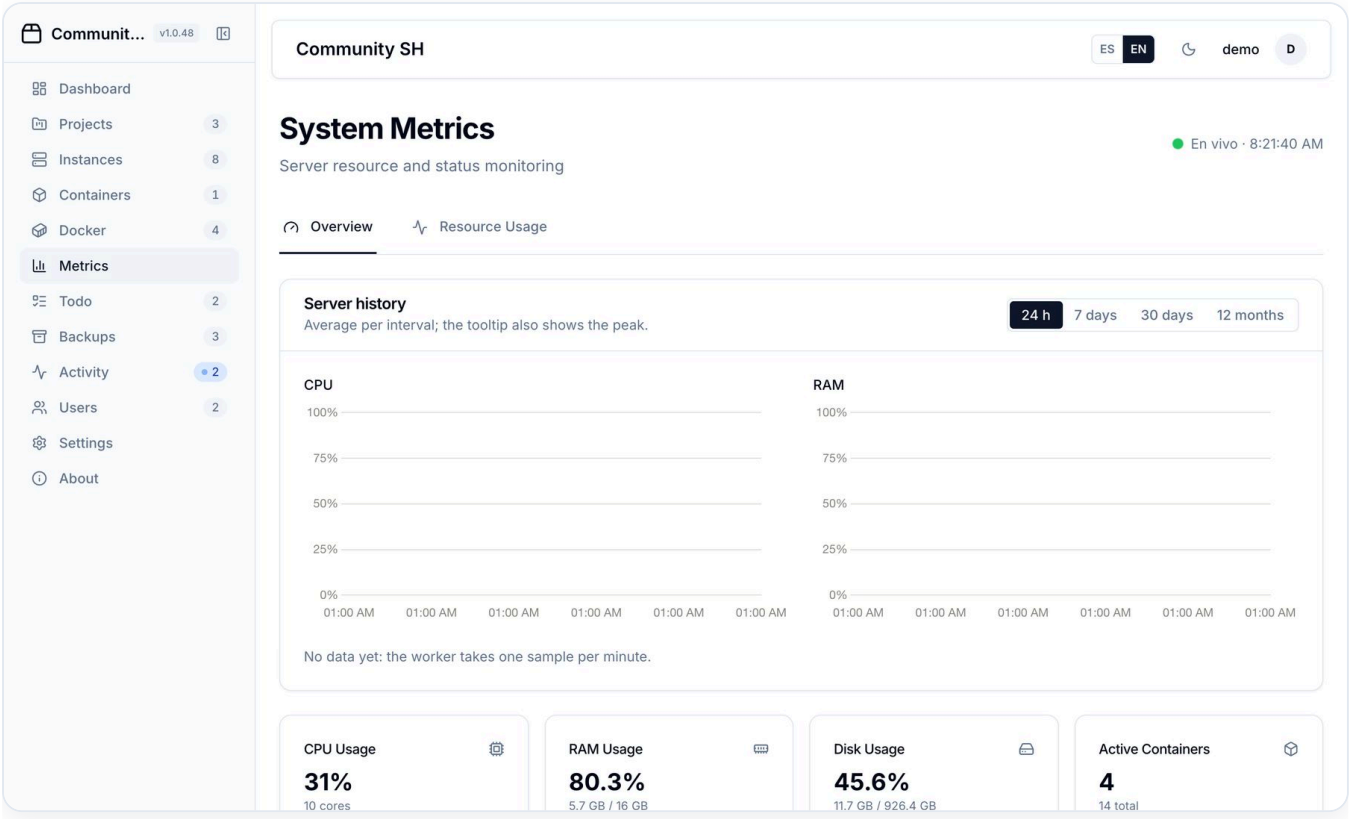


Figure 18. Server metrics

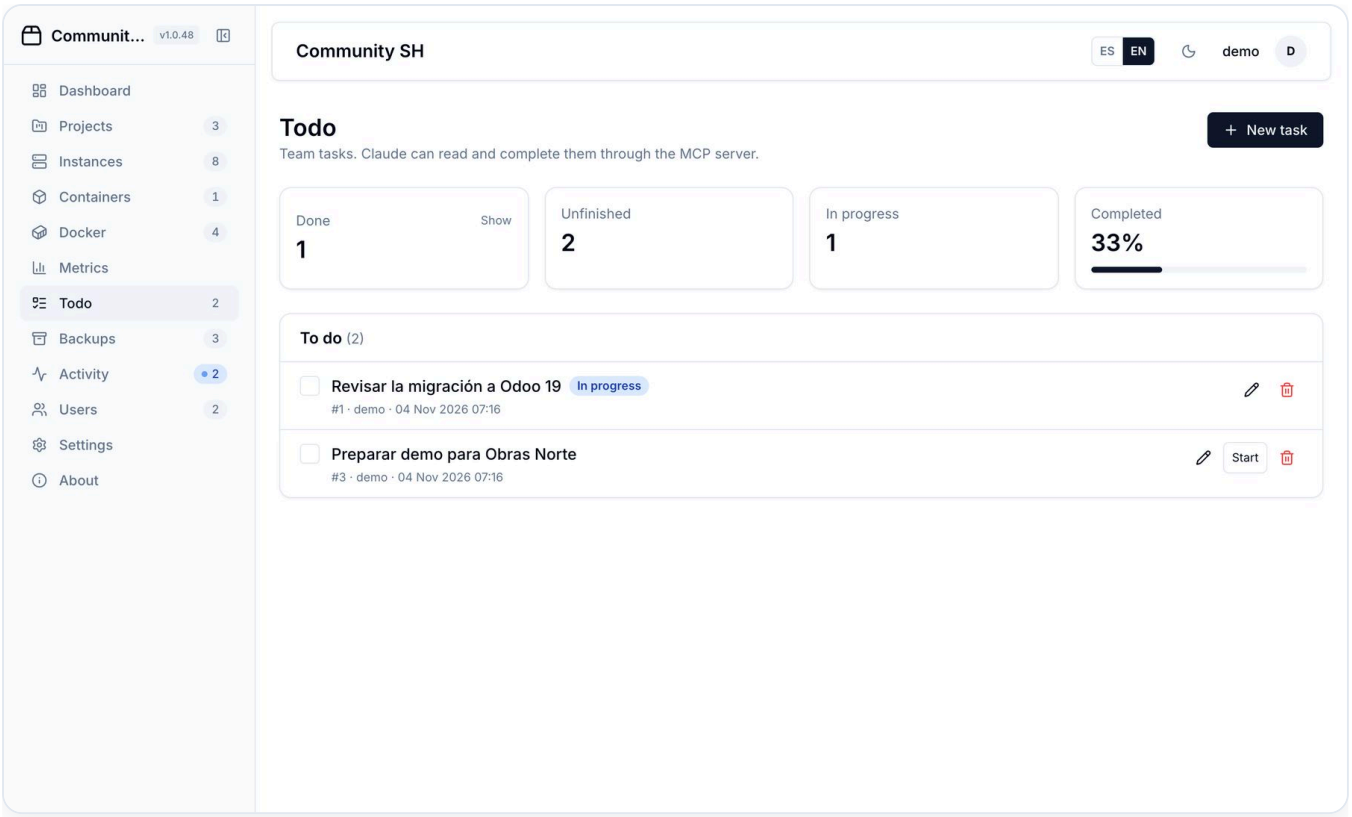


Figure 19. Team tasks

13 Settings

The panel configuration lives in the «Settings» menu (administrators only).

1. General: the main domain (each instance gets an HTTPS subdomain *.yourdomain), public sign-up and mandatory 2FA.
2. GitHub: your personal token to clone private repositories.
3. Backups: automatic backups and retention. Email notifications.
4. API and MCP: create personal tokens for the REST API (Bearer) and to connect Claude to the panel. The API tab lists every endpoint.
5. AI: the key of the assistant that creates modules.
6. Email: the SMTP server (host, port, security, user, password and sender). «Send test» sends an email with what is typed, even unsaved.
7. Demos: the limit of demos per day and at once for the whole server.

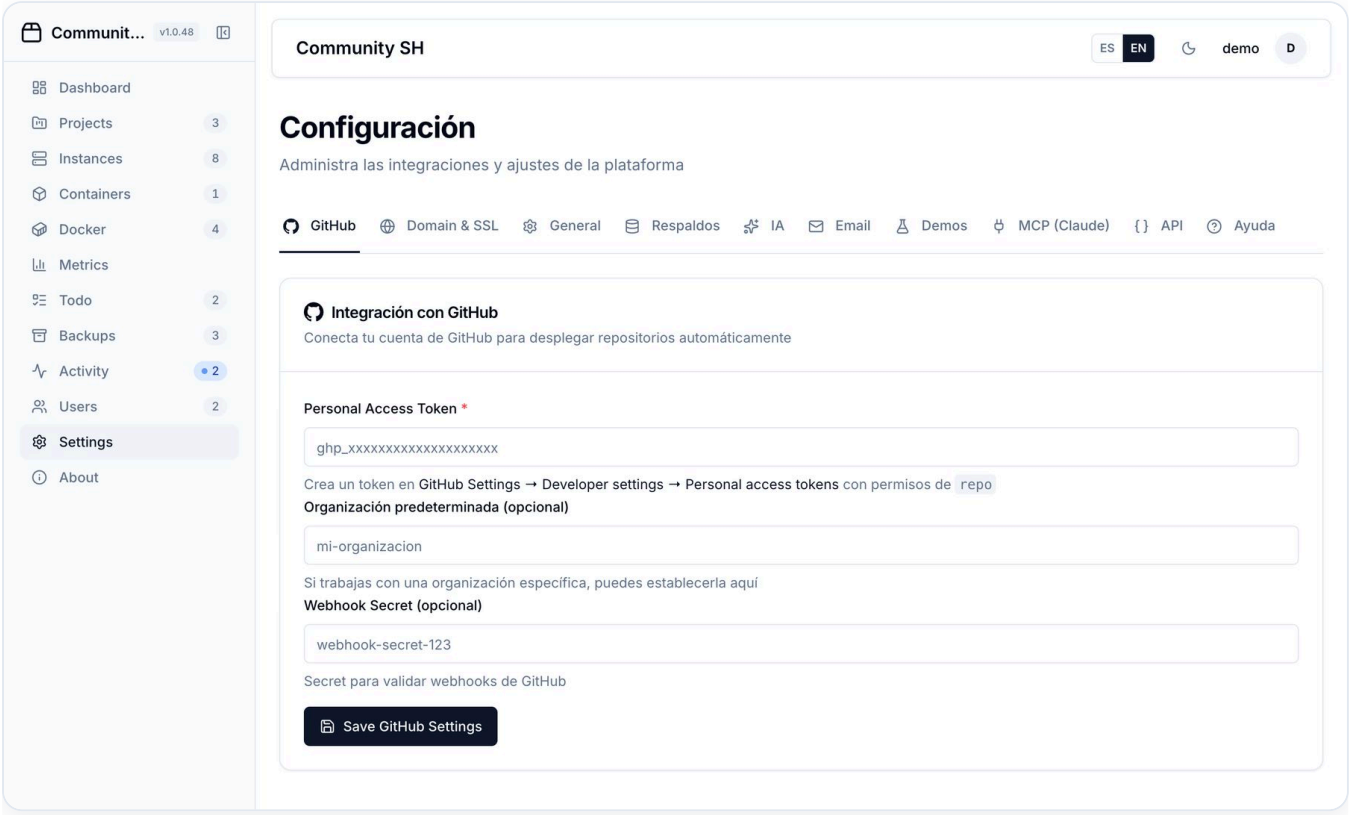


Figure 20. Settings

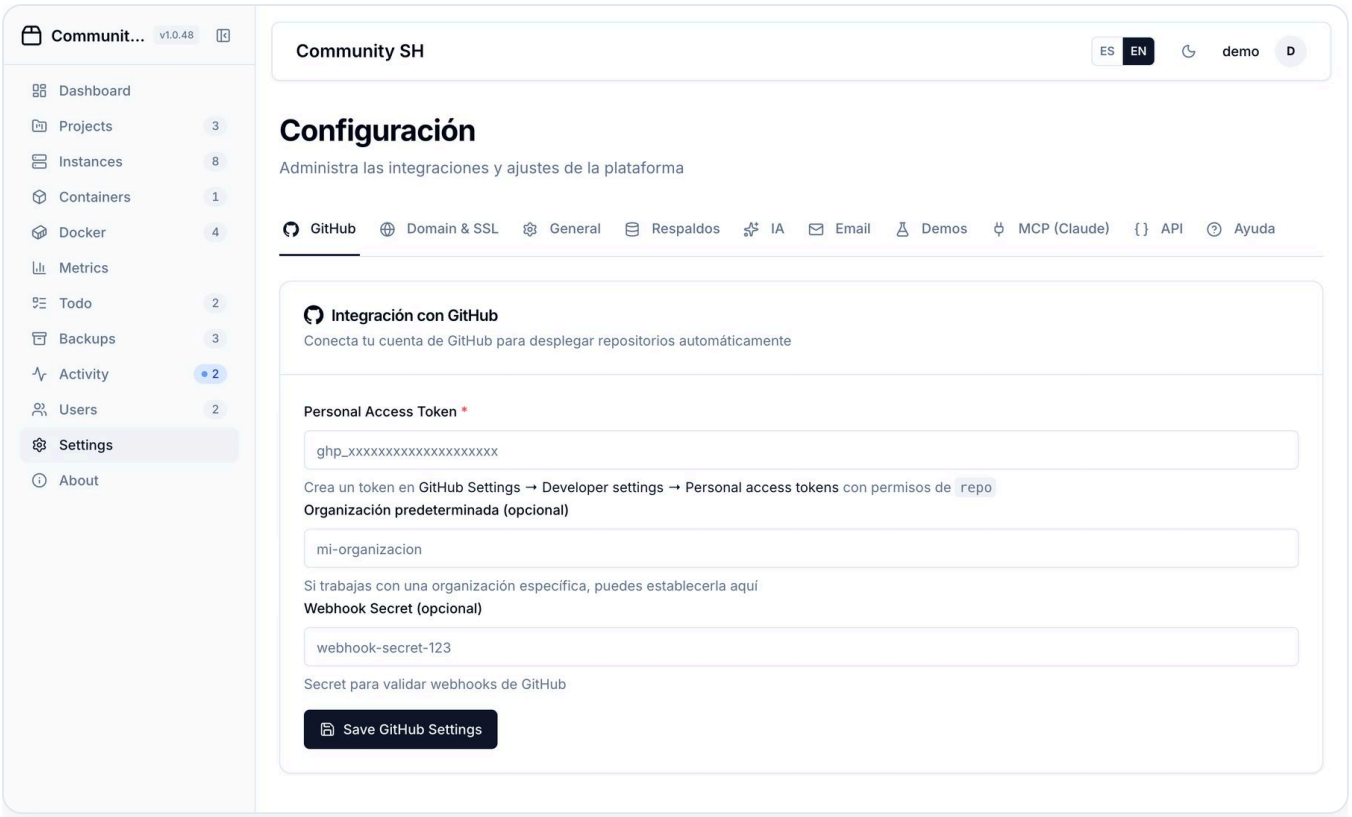


Figure 21. Settings → Email: outgoing mail server

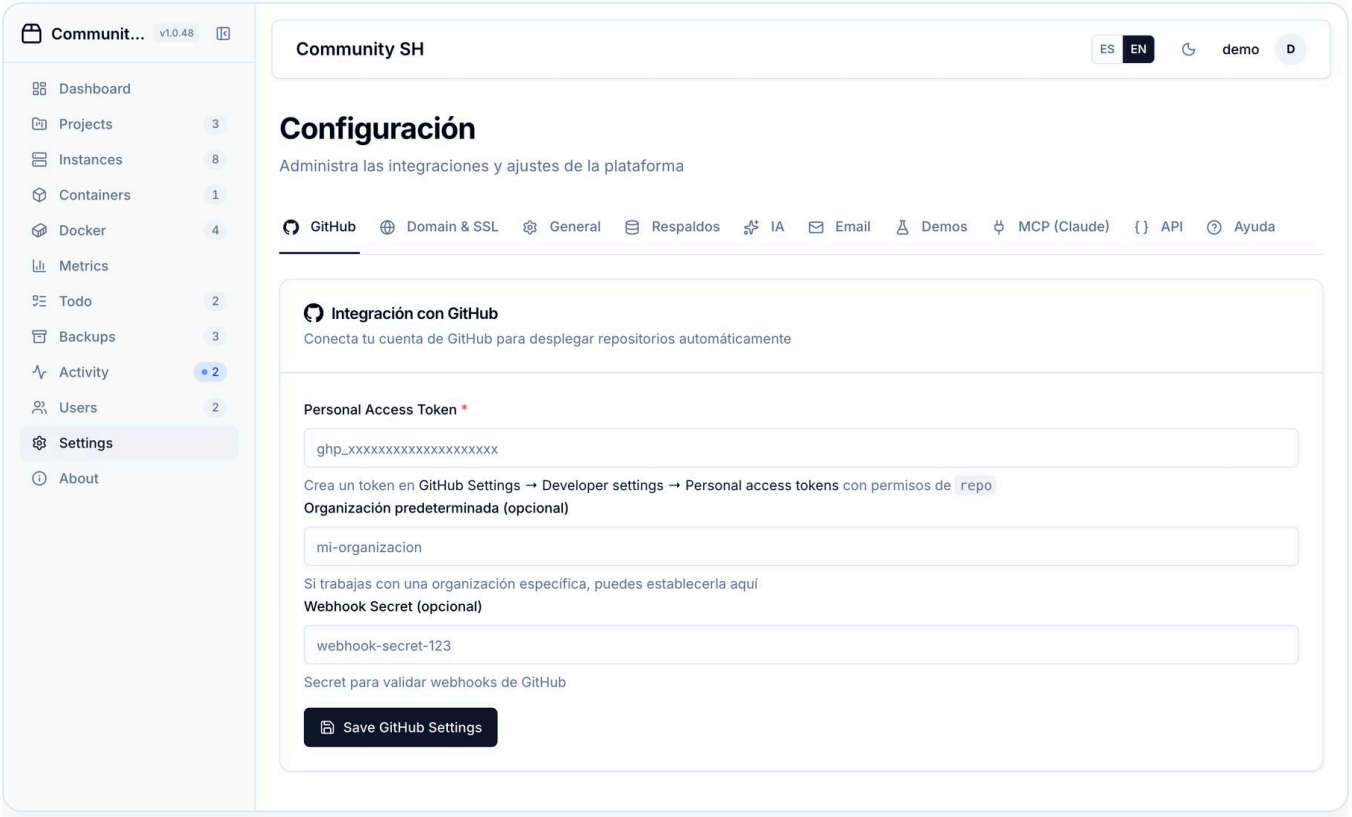


Figure 22. Settings → Demos: limits

14 Security: good practices

Community SH protects the panel and the instances by default. These are the measures, and what is up to you.

✓ What the panel does

- With a domain and HTTPS everything goes through Traefik: the panel and the Odoo ports only listen on the server itself, cookies only travel over HTTPS and browsers remember to use HTTPS (HSTS).
- The panel only answers its own domain and the server IP.
- Lockout after failed sign-ins: 5 from one address and 20 overall per account, also for variants of the username.
- Optional or mandatory two-step verification (2FA); when mandatory, API and MCP tokens need it too. Changing or removing it asks for a current code.
- Each user only sees their projects; clients operate their instances but don't manage them or see the master password.
- The API never writes internal fields (volumes, subdomain, certificates, master password). Repositories are only cloned over HTTPS and branches are checked.
- User containers can't take the panel's names or mount someone else's volumes.
- Uploaded ZIP files are checked before they are unpacked (paths, number of files and size).
- Demos: own captcha (a one-time sum), one per email a month, daily and at-once limits, no AI assistant, mail switched off, no API keys and new passwords for the other users. None is built when memory is short.
- Tokens are stored hashed and shown only once.

→ What is up to you

- Set up a domain with HTTPS (the installer does it) and keep `PANEL_BIND=127.0.0.1` in the .env file.
- Change the administrator password the installer created and enable 2FA. Make it mandatory in Settings when there are more users.
- Use instances without real customer data as demo templates.
- Revoke the tokens you don't use and keep the GitHub token with the least permissions.
- Keep the server updated and schedule automatic backups (and download them off the server).
- Set the daily and at-once limits in Settings → Demos to what the server memory allows.