

STORY AGENT · PILLAR

Cost & Model Routing

How this pillar works and why it matters.


Team assembled by Riker: Jean-Luc Picard, Quark.

[↑ Story Agent overview \(HTML\)](#) · [↑ overview \(PDF\)](#).

COST & MODEL ROUTING

At a glance

Diagram for Cost & Model Routing. Zoom/pan live during Q&A.

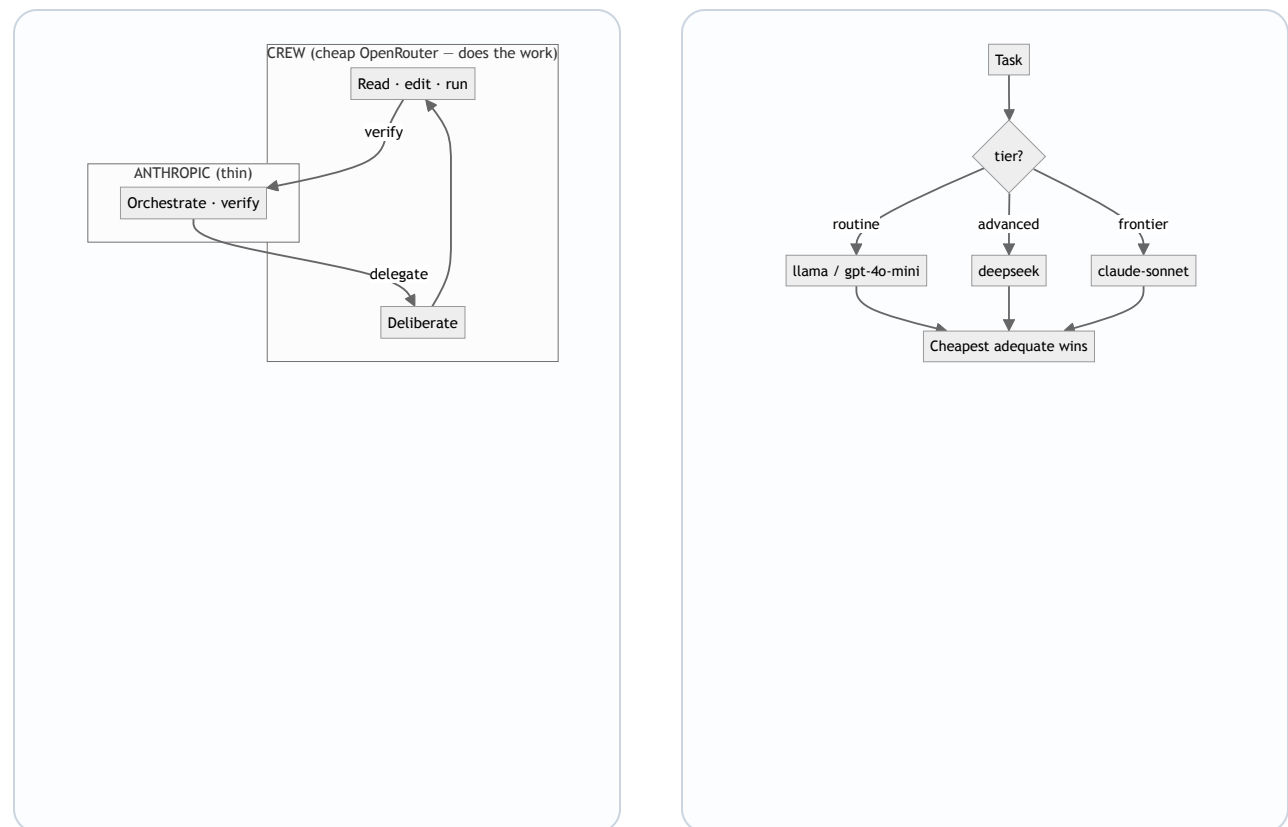

Cost-Optimized Autonomous Orchestration

Jean-Luc Picard: Emphasize that this isn't just cost-cutting—it's precision routing. WorfGate's remediation and Quark's model selection are why clients trust us for scalable, secure self-hosting. Reference the \$0.003/deliberation benchmark as industry-leading.

- Quark Routing: Dynamically selects cheapest adequate model per task (Anthropic reserved for tier-4 only), averaging \$0.002–0.003 per deliberation.
- WorfGate: Credential broker with auto-remediating governor (green/yellow/red) ensures security without logging secrets.
- Control Lane: Real-time cost attribution + async-status guardrails (progress tracking, timeout failsafes) prevent budget overruns.

Why it matters: Delivers enterprise-grade autonomy at 1/10th the cost of premium-only solutions, with auditable security and cost controls.

Quark's view

Quark: Our cost optimization strategy is designed to minimize expenses while ensuring the quality of results. We achieve this by using primary models for critical tasks and low-cost models for support tasks. This approach enables us to provide clients with a cost-effective solution without compromising on quality.

- Average cost per deliberation: \$0.002-0.003
- Model tier distribution: primary models for critical tasks, low-cost models for support tasks
- Cost attribution tracking via control-lane

Why it matters: By leveraging the Quark cost profile, clients can achieve significant cost savings while maintaining high-quality results.

END OF PILLAR

Cost & Model Routing — recap

Recap, then return to the book cover to pick the next pillar.

- **Jean-Luc Picard:** Cost-Optimized Autonomous Orchestration
- **Quark:** Quark's view

[↑ Back to Story Agent overview \(HTML\)](#) · [↑ overview \(PDF\)](#)