


# Homework "Hash cracking and other snacks"

Rock.txt ( *couldn't use Hashcat Command due to weak performance* )

## MD5

1. b64f1a77b1b317d347f5cb79332c86d2, password: **741852963**
2. f5bb0c8de146c67b44babbf4e6584cc0, password: **123123123**

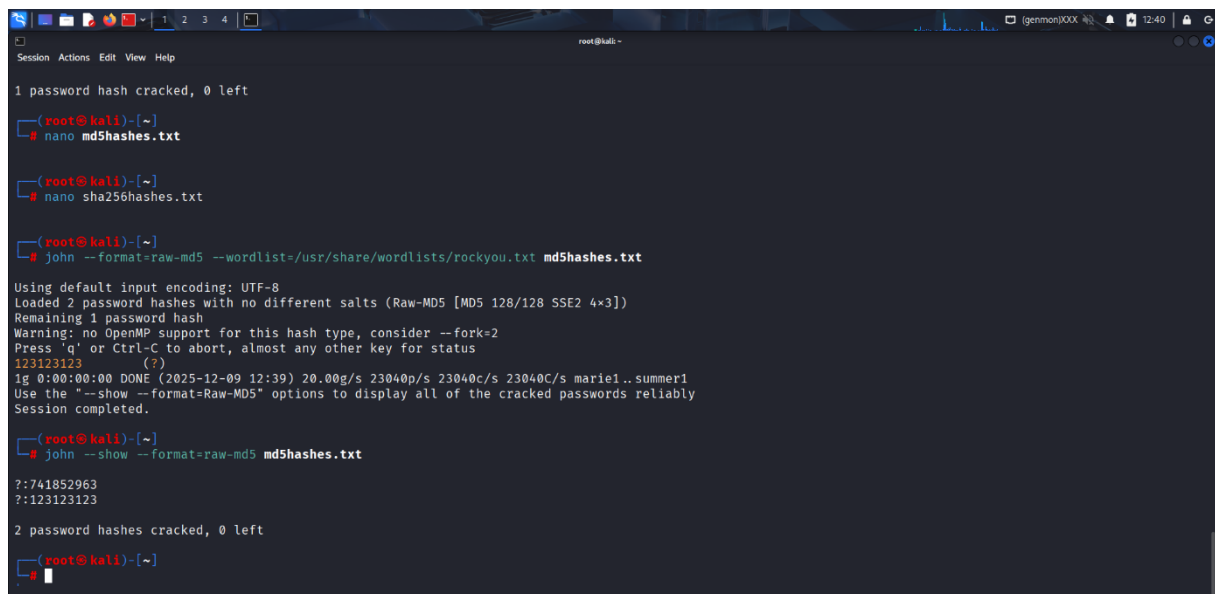

```
root@kali: ~  
1 password hash cracked, 0 left  
root@kali: ~  
# nano md5shashes.txt  
root@kali: ~  
# nano sha256shashes.txt  
root@kali: ~  
# john --format=raw-md5 --wordlist=/usr/share/wordlists/rockyou.txt md5shashes.txt  
Using default input encoding: UTF-8  
Loaded 2 password hashes with no different salts (Raw-MD5 [MD5 128/128 SSE2 4x3])  
Remaining 1 password hash  
Warning: no OpenMP support for this hash type, consider --fork=2  
Press 'q' or Ctrl-C to abort, almost any other key for status  
123123123 (?)  
lg 0:00:00:00 DONE (2025-12-09 12:39) 20.00g/s 23040p/s 23040c/s 23040C/s marie1..summer1  
Use the "--show --format=Raw-MD5" options to display all of the cracked passwords reliably  
Session completed.  
root@kali: ~  
# john --show --format=raw-md5 md5shashes.txt  
?:741852963  
?:123123123  
2 password hashes cracked, 0 left  
root@kali: ~  
#
```

## SHA256

3. f0e2e750791171b0391b682ec35835bd6a5c3f7c8d1d0191451ec77b4d75f240, password: **spongebob**

## “Metasploit”

1. bc55cdd78e059b9c0935dfdda17a280a

- Hash Algorithm: MD5
- Cracked Password: xmas
- Line Number in Metasploit password: 87681

(Found using *grep -n "xmas" /usr/share/metasploit-framework/data/wordlists/password.lst*)

- Scan Name: xmas Scan
- Purpose: The XMAS scan is a TCP port-scanning technique used to determine whether a port is **open, closed, or filtered** by sending specially crafted packets.
- Flags Set: **FIN,PSH,URG**

# Homework "Hash cracking and other snacks"

```
Session Actions Edit View Help
root@kali: ~
john --show --format=raw-md5 meta_md5.txt
q
?:xmas

1 password hash cracked, 0 left
?:xmas

1 password hash cracked, 0 left
q version 3.1.6
Python: 3.13.7 (main, Aug 20 2025, 22:17:40) [GCC 14.3.0]
Copyright (C) 2012-2021 Harel Ben-Attia (harelba@gmail.com, @harelba on twitter)
http://harelba.github.io/q/

Must provide at least one query in the command line, or through a file with the -q parameter

(root@kali)-[~]
# grep -n "<password>" /usr/share/metasploit-framework/data/wordlists/password.lst

(root@kali)-[~]
# grep -n "xmas" /usr/share/metasploit-framework/data/wordlists/password.lst
87681:xmas

(root@kali)-[~]
#
```