


Clients



① Hot Query —
cache hit → low latency
(~10ms)

Compute Layer
(Stateless Query Nodes)

Stateless — nodes can
be added/removed
elastically.

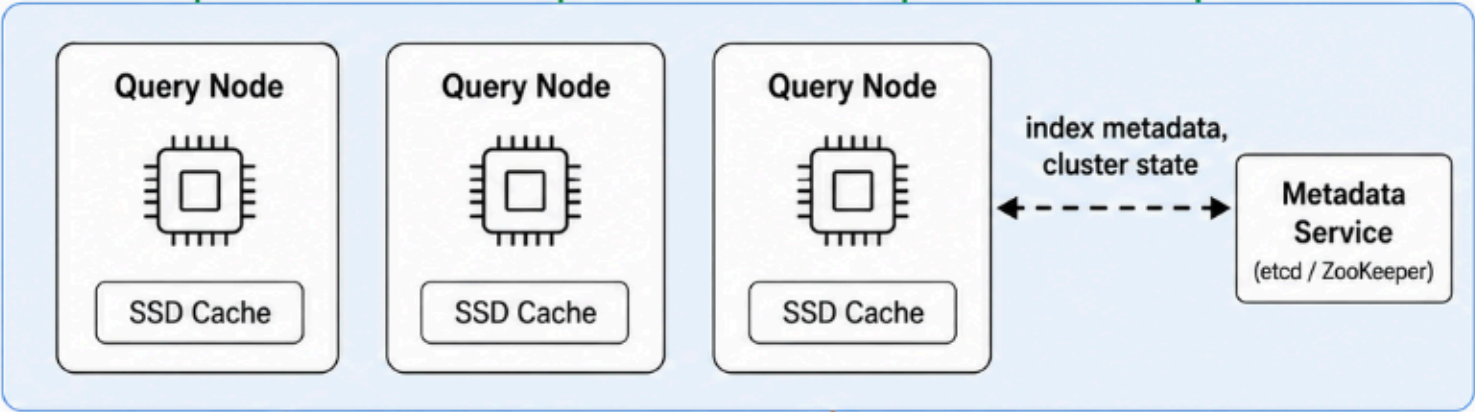

② Cold Start Query —
cache miss → fetch from storage →
high latency (seconds)

Storage Layer
(Object Storage — S3-class)

Durable, elastic — scales
independently from compute.

