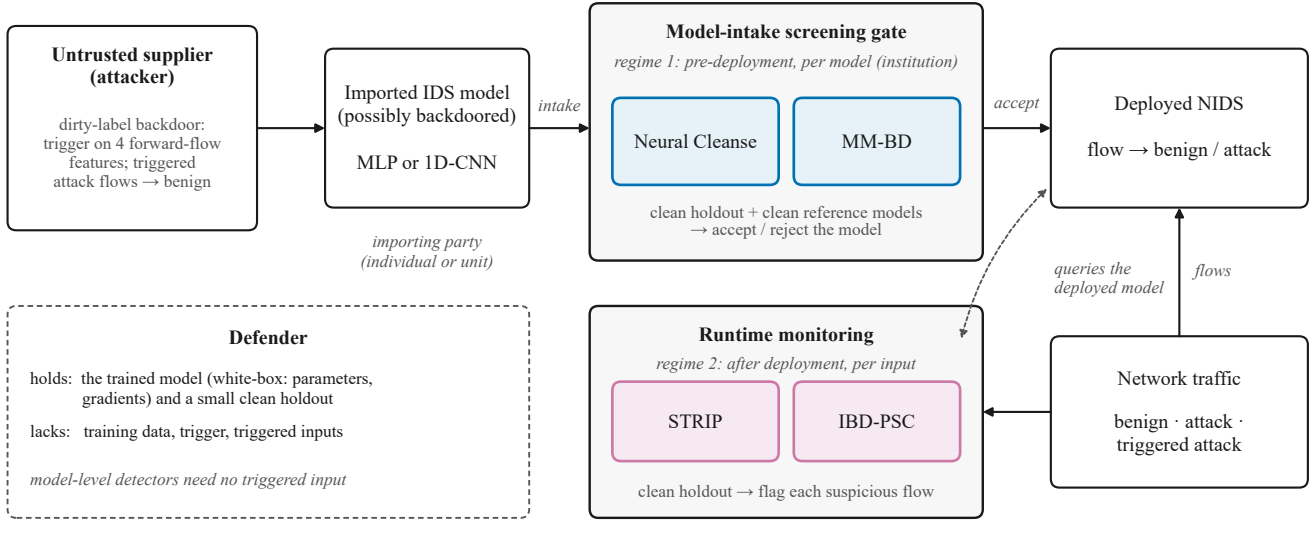

Untrusted supplier (attacker)
dirty-label backdoor: trigger on 4 forward-flow features; triggered attack flows → benign
Imported IDS model (possibly backdoored)
MLP or 1D-CNN
importing party (individual or unit)
intake
Model-intake screening gate
regime 1: pre-deployment, per model (institution)
Neural Cleanse
MM-BD
clean holdout + clean reference models → accept / reject the model
accept
Deployed NIDS
flow → benign / attack
queries the deployed model
flows
Runtime monitoring
regime 2: after deployment, per input
STRIP
IBD-PSC
clean holdout → flag each suspicious flow
Network traffic
benign · attack · triggered attack
Defender
holds: the trained model (white-box: parameters, gradients) and a small clean holdout
lacks: training data, trigger, triggered inputs
model-level detectors need no triggered input