Fixed full-band models: vector, local-convolution and spectral families

The panel shows computational structure; v1/v2 names retain their own registry defaults and checkpoint identity.

A | Vector MLP family



mlp: no skip | res_mlp: 32-wide, depth 2 | res_mlp_wide: 256-wide, depth 6


pod_res_mlp: registry placeholder only; native POD projection/basis contract is not implemented

B | lifted_cnn




Zero padding; deliberately small local-feature baseline

C | fno_lite

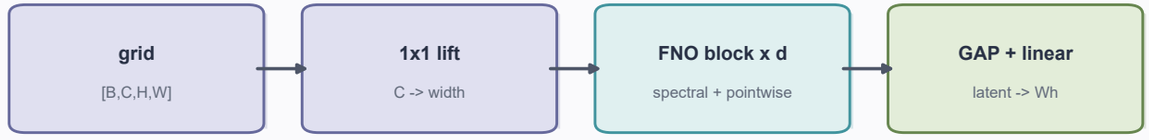

Minimal one-sided low-mode spectral baseline

D | fno2d_band, fno2d_band_v2 and fno2d_band_component_v1

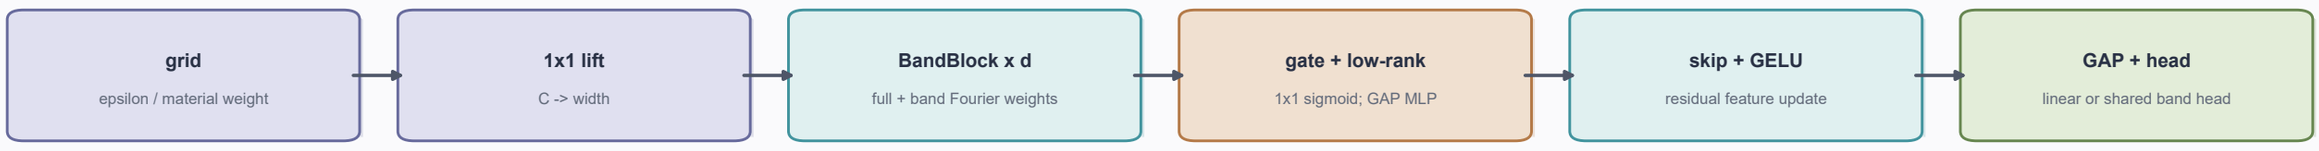

Pilot: width 12 / depth 2 | formal v2: width 32 / depth 4 | component identity: same v2 backbone plus frozen component masks and shared dense head