Continuous-query models: three ways to combine structure and k

All five registered identities predict a band vector at an explicit query coordinate; v2 changes capacity and formal data contract, not the fusion principle.

A | mlp_query

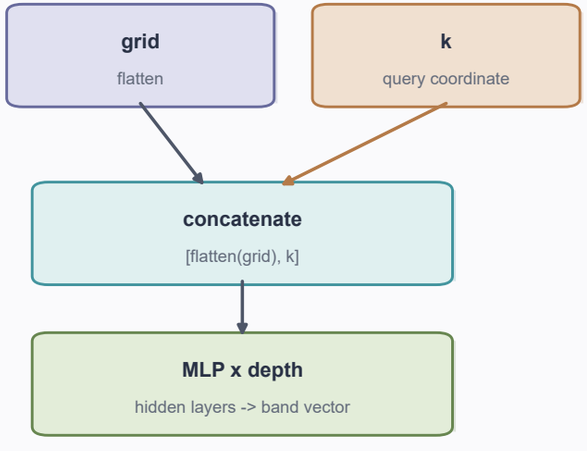

B | deep_onet_query / v2

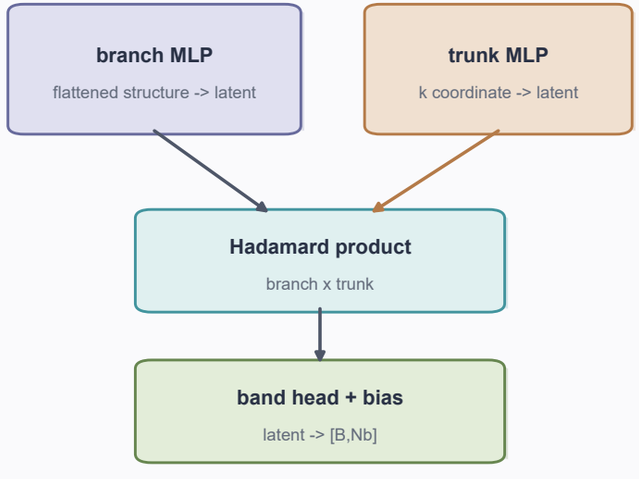

C | fno2d_query / v2

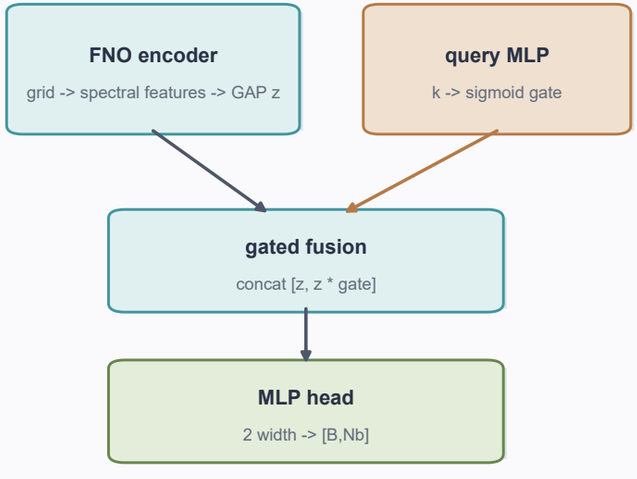

D | Registry-default variants

model	input grid	default capacity	fusion
mlp_query	12x14	hidden 64; depth 2	direct concatenation
deep_onet_query	12x14	latent 32; depth 2	branch-trunk product
deep_onet_query_v2	16x16	latent 128; depth 4	formal V2 identity
fno2d_query	12x14	width 16; depth 2; modes 6x7	query gate
fno2d_query_v2	16x16	width 32; depth 4; modes 8x8	formal V2 identity