# Grid event or data artefact? Hierarchical weak supervision for anomaly attribution in multi-city feeder telemetry

[Author names to be added][a]

[a] *[Affiliation to be added], Morocco*

**Abstract**

[Written last: at most 250 words; purpose, procedures, main findings with their statistical significance, principal conclusions.]

*Keywords:* weak supervision, anomaly attribution, feeder telemetry, data quality, outage statistics, load forecasting, distribution networks

## 1. Introduction

[To be written.]

## 2. Related work

[To be written.]

## 3. Data, hierarchy and typology

### *3.1. Datasets*

The study uses the UCI high-resolution load dataset from smart meters in four Moroccan cities [1, 2], introduced with a load-forecasting study [3]. The meters are installed by the national utility ONEE on 22 kV distribution feeders and record at 10-min intervals (30 min in Marrakech); the data were exported manually from the meters [2]. In Laâyoune, Boujdour and Foum El Oued the dataset covers every 22 kV feeder departure [2], so each city is observed in full. Each feeder is a *zone* in the dataset's terminology.

We analyse the file `Data Morocco.xlsx` of the UCI record (22,434,854 bytes; SHA-256 in the data availability statement), which is byte-identical to

Table 1: Datasets. Regular steps: length of the regular time grid from the first to the last stamp. Missing steps: grid steps without a record. Zone-steps: one zone at one time step. Exact zeros are counted after duplicated stamps are averaged (Foum El Oued has 4,329 exact zeros in the raw rows).

| City | Zones | Step (min) | Unit | Period | Regular steps | Missing steps | Exact-zero zone-steps |
|---|---|---|---|---|---|---|---|
| Laâyoune | 5 | 10 | A | Sep 2022 – May 2024 | 88,890 | 12 | 1,465 |
| Boujdour | 3 | 10 | A | Sep 2022 – May 2024 | 88,890 | 12 | 1,413 |
| Foum El Oued | 7 | 10 | A | Sep 2022 – May 2024 | 88,890 | 12 | 4,323 |
| Marrakech | 2 | 30 | kW | Jan 2023 – Jan 2024 | 17,520 | 25 | 101 |
| Tetouan[a] | 3 | 10 | n.s. | Jan – Dec 2017 | 52,416 | 0 | 0 |

[a]Transfer test only. n.s.: unit not stated in the repository record [4].

the file the repository served on 14 November 2026. Table 1 lists the series. The three southern cities (15 zones, in amperes) share one 10-min timeline from 14 September 2022 to 24 May 2024. In the data paper's table, Foum El Oued zones 5–7 end on 26 December 2023 [2]; in the analysed file they continue without a break until 24 May 2024. We call the three cities the *southern system*; it carries most of the analysis. Marrakech (2 zones, in kW, 2023) is recorded on its own 30-min timeline and is treated as a separate system. The UCI Tetouan dataset [4, 5], three distribution networks of one city at 10-min steps in 2017, is used only to test transfer to a new system (Section 6). Fig. 1(a) locates the five cities.

The repository record lists no missing values [1], but the regular time grid lacks the same 12 stamps in every southern zone and 25 in Marrakech, and some stamps occur twice: 12 per southern city, all on 30 October 2022 and 29 October 2023, and 3 in Marrakech. Duplicated stamps are averaged. None of the datasets comes with event labels: there is no record of which zeros or flat stretches are outages and which are acquisition failures. Exact zeros alone occupy 7,201 zone-steps in the southern system (Table 1). All time stamps are used as recorded, without any clock correction, so that clock errors remain observable as a data property.

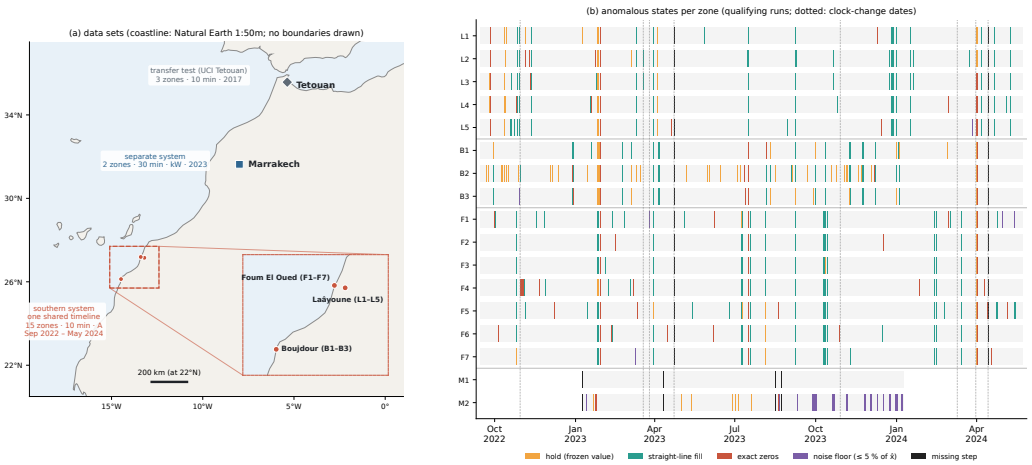



Figure 1: Data. (a) The five cities. Laâyoune, Boujdour and Foum El Oued (15 zones, 10 min, A) share one recording timeline; Marrakech (2 zones, 30 min, kW) is a separate system; Tetouan (3 zones, 2017) is the transfer test. Coastline from Natural Earth (1:50m, public domain); no boundaries are drawn. (b) Anomalous states per zone (holds, straight-line fills, exact zeros and noise-floor runs of qualifying length, and missing steps; Section 4); dotted lines mark clock-change dates. Time stamps as recorded.

### *3.2. The telemetry hierarchy*

The southern series form a three-level hierarchy: zone (one feeder), city (all feeders of one city) and region (the three cities). Each level corresponds to a different cause of a disturbance. A feeder fault or planned maintenance affects one zone. Losing a city's supply point de-energises all of that city's zones while the other cities keep running. A regional event affects several cities at once.

The acquisition chain forms a fourth, non-electrical layer. The three cities are recorded on one timeline, and a failure in the shared recording or export process can hit zones in different cities at the same time step, regardless of the electrical topology. We hypothesise that such failures leave traces that a de-energised feeder does not: series held at an identical value, stretches that are perfectly straight lines, and exact zeros, where a de-energised feeder would read a small, noisy residual current. The method treats these signatures, together with the level at which an anomaly appears, as evidence: simultaneity across cities combined with these traces points to an artefact, whereas a noise floor confined to one zone or one city points to a grid event. Section 6 tests this hypothesis on the real data.

### *3.3. Problem formulation*

Let $x_{z,t}$ be the recorded value of zone $z$ at time step $t$, and $P$ the number of steps per day (144 at 10 min, 48 at 30 min). The expected value is the median of the same time-of-day slot over the previous $K = 14$ days, excluding zeros:

$$\hat{x}_{z,t} = \text{median}\left\{x_{z,t-kP} \;:\; k = 1, \ldots, K,\; x_{z,t-kP} \neq 0\right\}. \tag{1}$$

During the first 14 days of each series, $\hat{x}$ rests on fewer than $K$ days, and this period is treated as a warm-up. The relative level

$$\rho_{z,t} = x_{z,t} / \hat{x}_{z,t} \tag{2}$$

is unit-free, so amperes, kilowatts and feeders of different sizes are compared on one scale.

An *item* $i$ is a candidate event: a dead or fill span with its set of affected zones, a clock-change date in a city, or a load-transfer day for a pair of zones (Section 4.2). Items that touch or follow one another are linked into *episodes*, such as a hold followed by a zero fill. The type of an item $y_i$ belongs to $\mathcal{Y} = \{\text{A1}, \ldots, \text{A4}, \text{G1}, \ldots, \text{G5}, \text{N}\}$ (Section 3.4). The task has four parts: *detection*, finding the items; *attribution*, estimating a probability distribution $p_i(y)$ over $\mathcal{Y}$ for each item; *localisation*, identifying the level (zone, city or region) that carries the anomaly; and *type-aware cleaning*, imputing artefacts while keeping grid events in the data and marking them. All four must be solved without labelled examples.

### *3.4. Typology*

Table 2 and Fig. 2 define nine anomaly types, each with a measurable signature at one level of the hierarchy. The four *data artefacts* are zero-fill gaps across cities (A1), simultaneous fills of several zones by held values or straight lines (A2), the same fills in a single zone (A3), and clock errors that shift the daily profile after a clock-change date (A4). The five *grid events* are regional outages (G1), city outages (G2), unplanned feeder outages (G3), planned work (G4) and load transfers between feeders (G5). Items that no type fits are labelled N (normal or untyped).

Straight-line fills were not part of the initial typology. They appeared in the data audit (Section 6) and are now part of A2 and A3. The expected signatures of grid events, in particular gradual restoration and cold-load pick-up after an outage, are hypotheses that Section 6 tests on the real data.

Table 2: Typology. Level: the level of the hierarchy at which the signature appears. Rules: the labelling rules that vote for the type (Section 4). Real items: rule items assigned the type in the final catalogue of the real data. $\eta$: share of exact zeros in a dead run; $\pi$: restoration overshoot; $\delta^*$: estimated clock offset; $\kappa$: conservation index.

| Type | Name | Level | Signature | Rules | Real items |
|---|---|---|---|---|---|
| A1 | Zero-fill gap | Region ($\geq 2$ cities) | Exact zeros ($\eta = 1$) in $\geq 2$ cities at once, often after a hold or straight-line fill; returns at once | R1, R3, R4, R21 | 3 |
| A2 | Simultaneous fill | $\geq 2$ zones | $\geq 2$ zones held at identical values or straight-line interpolated over the same span | R2, R19 | 57 |
| A3 | Single-zone fill | Zone | One zone held or straight-line interpolated while its neighbours move normally | R12, R20 | 98 |
| A4 | Clock error | System, one day | Daily profile shifted by $\delta^* \approx \pm 60$ min after a clock-change date; duplicated or missing stamps | R13, R14, R15 | 14 |
| G1 | Regional outage | Region ($\geq 2$ cities) | Noise floor ($\eta < 0.9$) in $\geq 2$ cities; hypothesised: gradual restoration with cold-load overshoot $\pi \geq 1.15$ | R5, R6, R7 | 0 |
| G2 | City outage | City | All zones of one city at the noise floor while the other cities stay normal | R8 (R5, R6) | 1 |
| G3 | Unplanned feeder outage | Zone | One zone at the noise floor at any hour, possibly for more than 24 h | R9, R11 (R6) | 52 |
| G4 | Planned work | Zone | One zone at the noise floor, starting 06:00–11:59, shorter than 6 h | R10 | 70 |
| G5 | Load transfer | $\geq 2$ zones of a city | One zone steps down while another steps up by the same amount ($\kappa \approx 0$) | R16 | 1 |




Figure 2: Typology. Four data artefacts (A1–A4) and five grid events (G1–G5), each with a measurable signature at one level of the zone–city–region hierarchy and the rules that vote for it (schematic). Straight-line fills are part of A2 and A3.

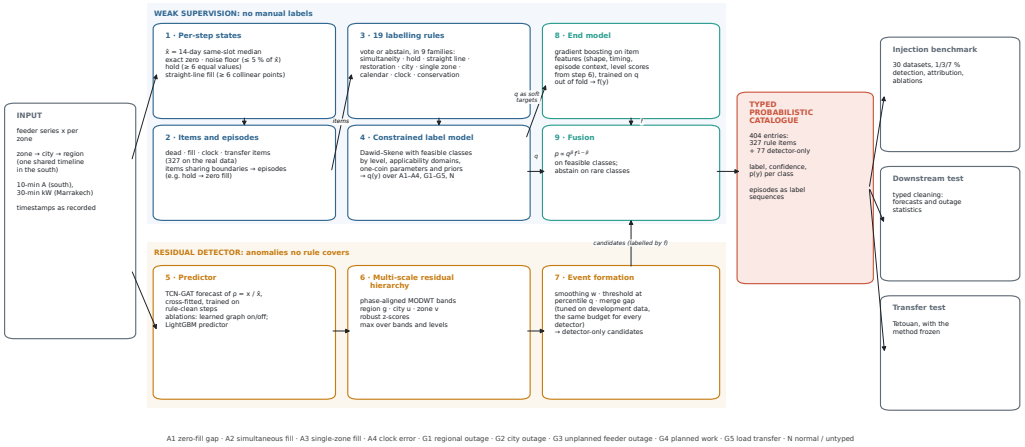



Figure 3: Framework. Per-step states and items feed 19 labelling rules and a constrained Dawid–Skene label model (weak supervision, no manual labels). A multi-scale hierarchical residual detector finds anomalies that no rule covers. An end model and a fusion step produce the typed, probabilistic catalogue, which is evaluated by injection, by a downstream test and by transfer to another city (Section 5).

## 4. Method

### *4.1. Overview*

Fig. 3 summarises the framework. Per-step states turn each series into candidate *items*. Labelling rules vote on the items, and a label model combines the votes into probabilistic labels without any manual annotation (weak supervision [6]). In parallel, a multi-scale residual detector scores every zone at every step and finds anomalies that no rule covers. An end model learns the labels from item features, including the detector's scores, and a fusion step combines both sources of evidence into the final typed, probabilistic catalogue. Type-aware cleaning then uses the catalogue.

### *4.2. Per-step states, items and signatures*

Four states are computed for each zone series. A step is an exact zero if $x_{z,t} = 0$ and at the noise floor if $x_{z,t} \le \varepsilon\, \hat{x}_{z,t}$, with $\varepsilon = 0.05$. A zone is *dead* at step $t$ when

$$d_{z,t} = \mathbb{1}[x_{z,t} = 0] \;\vee\; \Big(\mathbb{1}[x_{z,t} \le \varepsilon\, \hat{x}_{z,t}] \wedge \neg \ell_{z,t}\Big), \tag{3}$$

where $\ell_{z,t}$ marks straight-line fills (below); dead runs need at least three steps. For a dead run $E$, the exact-zero share

$$\eta_E = \frac{1}{|E|} \sum_{t \in E} \mathbb{1}[x_{z,t} = 0] \tag{4}$$

separates exact zeros, which a recording gap produces, from the small residual current of a de-energised feeder. A step is *held* if it belongs to a run of at least $m_h$ identical non-zero values,

$$h_{z,t} = \mathbb{1}[x_{z,t} = x_{z,t-1} \neq 0], \tag{5}$$

with $m_h = 6$ at 10 min and 12 at 30 min. Straight-line fills, the signature found in the data audit, are runs of at least $m_\ell$ collinear points (6 at 10 min, 12 at 30 min), detected through a vanishing second difference:

$$\ell_{z,t} = \mathbb{1}\Big[\, |\Delta^2 x_{z,t}| < 10^{-8} \max(1, |x_{z,t}|) \;\wedge\; |\Delta x_{z,t}| > 10^{-12} \;\wedge\; x_{z,t} \neq 0 \,\Big]. \tag{6}$$

When states overlap, exact zero takes precedence over a straight-line fill, which takes precedence over the noise floor and then the hold.

*Items* are the units the rules vote on. Dead runs of one system whose starts lie within $\tau = 10$ min of the first start form a dead item; hold and straight-line runs form fill items in the same way. The simultaneity of an item is the number of cities involved,

$$S_E = \left|\{c : \exists z \in c,\ |s_z - s_E| \leq \tau\}\right|, \qquad s_E = \min_z s_z, \tag{7}$$

where $s_z$ is the start of zone $z$'s run. Each item also records whether a fill run in another zone is co-extensive with it (time intersection over union $\geq 0.5$) and whether a fill ends exactly where a dead run begins. Items that overlap or touch, and share a boundary or most of their span, are linked into *episodes*.

Restoration is measured after the event, but only once any straight-line fill that follows it has ended, because such a fill imitates a ramp. With $k_z$ the first step after the run and after any adjoining fill in zone $z$,

$$r_E = \frac{\sum_z \sum_{j=0}^{n_{30}-1} x_{z,k_z+j}}{\sum_z \sum_{j=0}^{n_{30}-1} \hat{x}_{z,k_z+j}}, \qquad \pi_E = \max_{0 \leq j < n_{60}} \frac{\sum_z x_{z,k_z+j}}{\sum_z \hat{x}_{z,k_z+j}}, \tag{8}$$

where $n_{30}$ and $n_{60}$ are the steps in 30 and 60 min; the ramp time $\tau_E$ is the delay until the ratio first reaches 0.9 (within 6 h).

Two further item kinds test the remaining types. For load transfers, $\Delta_z(d)$ is the change in a zone's 14-day median of daily means around day $d$, and a candidate day is one where one zone rises and another falls by more than a quarter of their mean level. The conservation index

$$\kappa(d) = \frac{\left|\sum_z \Delta_z(d)\right|}{\max\Big(\Delta^{+}(d),\, -\Delta^{-}(d)\Big)}, \tag{9}$$

with $\Delta^{+}$ and $\Delta^{-}$ the largest rise and fall, is near 0 when current moves between feeders and near 1 when load appears or disappears. For clock errors, candidate dates are the European and Moroccan clock-change dates and every date with duplicated or missing stamps. With $p_{\mathrm{pre}}$ and $p_{\mathrm{post}}$ the mean normalised daily profiles over the 7 days before and after a date (anomalous steps removed), the clock offset is

$$\delta^{*} = \arg\max_{\delta \in [-120,\,120]\ \min} \operatorname{corr}\Big(p_{\mathrm{pre}},\, \operatorname{shift}_{\delta}(p_{\mathrm{post}})\Big). \tag{10}$$

### *4.3. Labelling rules*

Nineteen rules turn these signatures into votes (Table 3). Each rule emits one label or abstains. The rules fall into nine families: simultaneity, holds, restoration, city, single zone, calendar, clock, conservation and straight-line fills. Nine of the rules are *defining*, i.e. their condition is the type's definition. A rule may vote for the grid-event family as a whole (G) rather than a single type. Rule numbers follow the released code: two rules planned on external utility and press records (R17, R18) were not implemented, so no rule uses external records and the numbering skips from R16 to R19.

### *4.4. Why the standard label model fails here*

The Dawid–Skene model [7] treats each rule $r$ as an annotator with a confusion matrix $\theta_r(y, l)$, the probability that $r$ outputs $l$ on an item of type $y$ when it fires, and computes, for item $i$,

$$q_i(y) \propto \pi_y \prod_{r:\, \lambda_r(i) \neq \varnothing} \theta_r\Big(y, \lambda_r(i)\Big). \tag{11}$$

When abstentions are ignored, as in Eq. (11), a rule that can emit only one label $l$ has $\theta_r(y, l) = 1$ for every $y$: its vote multiplies every class by the same factor, and the posterior equals the prior. All nineteen rules are of

Table 3: Labelling rules. Item: the item kind the rule reads. Coverage: share of the real-data items of that kind on which the rule fires. Precision: the label model's learned precision (mean posterior mass on the voted type over the items the rule fires on). R7 never fires on the real data. †Defining rule. $r_E$, $\pi_E$, $\tau_E$: Eq. (8).

| Rule | Family | Item | Vote | Condition | Coverage | Precision |
|---|---|---|---|---|---|---|
| R1 | Simultaneity | Dead | A1 | $S_E \geq 2$, $\eta_E \geq 0.95$, $\lvert r_E - 1 \rvert \leq 0.2$, $\tau_E \leq 10$ min | 0.008 | 1.00 |
| R2† | Hold | Fill | A2 | Held in $\geq 2$ zones | 0.077 | 0.99 |
| R3 | Hold | Dead | A1 | A hold ends where the dead run starts | 0.024 | 0.67 |
| R4 | Hold | Dead | A1 | A co-extensive hold in another zone | 0.024 | 0.33 |
| R5 | Restoration | Dead | G | Overshoot $\pi_E \geq 1.15$ | 0.167 | 0.96 |
| R6 | Restoration | Dead | G | Noise floor, $\eta_E < 0.9$ | 0.667 | 1.00 |
| R7 | Simultaneity | Dead | G1 | $S_E \geq 2$, no hold or fill evidence, and R5, R6 or slow restoration | 0 | – |
| R8† | City | Dead | G2 | $\geq 90\%$ of one city's zones dead, other cities alive | 0.008 | 0.99 |
| R9 | Single zone | Dead | G3 | One zone | 0.968 | 1.00 |
| R10† | Calendar | Dead | G4 | One zone, starts 06:00–11:59, lasts $\leq 6$ h | 0.548 | 0.96 |
| R11 | Single zone | Dead | G3 | One zone, lasts $> 24$ h | 0.032 | 0.98 |
| R12† | Hold | Fill | A3 | Held in one zone, neighbours varying | 0.284 | 1.00 |
| R13† | Clock | Clock | A4 | Duplicated stamps on the date | 0.242 | 0.93 |
| R14† | Calendar | Clock | A4 | Missing stamps on a clock-change date | 0.182 | 0.70 |
| R15 | Clock | Clock | A4 | $\lvert \delta^* \rvert \geq 50$ min, correlation $\geq 0.9$ at $\delta^*$ and $\geq 0.05$ above that at 0 | 0.182 | 0.89 |
| R16† | Conservation | Transfer | G5 | $\kappa \leq 0.3$ | 0.077 | 0.68 |
| R19† | Straight line | Fill | A2 | Straight-line fill in $\geq 2$ zones | 0.310 | 1.00 |
| R20† | Straight line | Fill | A3 | Straight-line fill in one zone, neighbours varying | 0.310 | 1.00 |
| R21 | Straight line | Dead | A1 | A straight-line fill ends where the dead run starts, or is co-extensive | 0.040 | 0.19 |

this kind, so Eq. (11) cannot use them. Modelling abstention restores the information, but a free confusion matrix per rule is then unstable: most items receive only one to three votes, and different restarts of the estimation reach different labels (Section 6).

### *4.5. A constrained label model with abstention*

Three constraints make the model well-posed and stable. First, each item kind and level has a feasible set $\mathcal{Y}(i)$; for example, a dead item spanning two cities can only be A1 or G1, and a single-zone fill only A3 or N. Second, a rule only counts on the items it can observe (its applicability set $\mathcal{A}(i)$), and its abstention there is informative. Third, each rule output $l$ has a set $S(r,l)$ of types it speaks for. The posterior is

$$q_i(y) \propto \mathbb{1}[y \in \mathcal{Y}(i)]\, \pi_{k(i)}(y) \prod_{r \in \mathcal{A}(i)} \theta_r\Big(y, o_{ir}\Big), \qquad o_{ir} \in \{\varnothing\} \cup \mathrm{out}(r), \tag{12}$$

with a class prior $\pi_k$ per item kind, and each output has two parameters, in the spirit of the one-coin model [8]:

$$\theta_r(y,l) = \begin{cases} a_{rl}, & y \in S(r,l), \\ b_{rl}, & y \notin S(r,l), \end{cases} \qquad \theta_r(y,\varnothing) = 1 - \sum_{l} \theta_r(y,l). \tag{13}$$

The expectation–maximisation updates use Beta pseudo-counts:

$$a_{rl} = \frac{\alpha_1 + \sum_i m_i \mathbb{1}[o_{ir} = l]}{\alpha_1 + \alpha_0 + \sum_i m_i}, \qquad b_{rl} = \frac{\beta_1 + \sum_i n_i \mathbb{1}[o_{ir} = l]}{\beta_1 + \beta_0 + \sum_i n_i}, \\ \pi_k(y) \propto \gamma + \sum_{i:\, k(i)=k} q_i(y), \tag{14}$$

where the sums run over the items to which $r$ applies, and $m_i$ and $n_i$ are the posterior masses on $S(r,l)$ and on its complement. We set $(\alpha_1, \alpha_0) = (1,1)$, or $(9,1)$ for defining rules, $(\beta_1, \beta_0) = (1,9)$ and $\gamma = 1$, and keep the best of 20 restarts. The defining-rule prior matters: without it, 39% of the real dead items change label (the sensitivity to every prior and rule family is reported in the supplementary material). With these constraints all 20 restarts reach the same labels, and the model recovers its own parameters from votes simulated from it (Section 6).

### 4.6. Multi-scale hierarchical residual detector

The detector predicts each zone's relative level $\rho_{z,t}$ (clipped to $[0, 3]$) from information that excludes the zone's own current value, and scores the residual

$$e_{z,t} = \rho_{z,t} - \hat{\rho}_{z,t}, \qquad \hat{\rho}_{z,t} = f\Big(\rho_{z,<t},\, \{\rho_{z',t}\}_{z' \in \mathcal{N}(z)},\, \mathbf{c}_t\Big), \tag{15}$$

where $\mathbf{c}_t$ holds calendar features and the zone's values one and seven days earlier. The predictor $f$ combines a causal temporal convolutional network [9] over the zone's past (six residual blocks of two causal convolutions with kernel size 3 and dilations 1 to 32, a receptive field of 253 steps, about 42 h) with two-head graph attention [10] over the current values of its neighbours $\mathcal{N}(z)$: the zones of the same city and the four zones of other cities whose learned embeddings are most similar, as in GDN [11]. It is trained with a Huber loss [12] on rule-clean steps only, with two-fold temporal cross-fitting so that every prediction is made out of sample. The learned graph is evaluated as an ablation (Section 6).

The residual is split into frequency bands by a maximal overlap discrete wavelet transform (MODWT) with LA(8) filters [13],

$$W_{j,t} = \sum_{l=0}^{L-1} \tilde{h}_l \, V_{j-1,\, t-2^{j-1}l}, \qquad V_{j,t} = \sum_{l=0}^{L-1} \tilde{g}_l \, V_{j-1,\, t-2^{j-1}l}, \qquad V_0 = e, \tag{16}$$

for $j = 1, \ldots, 4$, where $\tilde{g}$ and $\tilde{h}$ are the LA(8) scaling and wavelet filters rescaled for the MODWT and $L = 8$. Each band is shifted by its group delay so that the bands align in time, and the detector uses $b \in \{e, W_1, \ldots, W_4, V_4\}$. In each band, the residual is decomposed along the hierarchy into a region part, a city part and a zone part:

$$g_t = \operatorname*{med}_{z \in R} e_{z,t}, \qquad u_{c,t} = \operatorname*{med}_{z \in c} e_{z,t} - g_t, \qquad v_{z,t} = e_{z,t} - g_t - u_{c(z),t}. \tag{17}$$

A failure shared by the whole system moves $g$, a city outage moves $u_c$ and a feeder fault moves only $v_z$. Each part $\epsilon \in \{g, u_c, v_z\}$ is scored by a trailing robust $z$-score,

$$s_t^{\epsilon} = \frac{|\epsilon_t| - \operatorname{med}_W |\epsilon|}{1.4826 \, \operatorname{MAD}_W |\epsilon| + 10^{-6}}, \tag{18}$$

where $W$ is the previous 28 days restricted to rule-clean steps and the MAD is scaled to be consistent at the normal distribution [14]. Structural zeros ($|\epsilon| \le 10^{-12}$) are excluded from $W$: a median over an odd number of zones is

attained by one of them, whose part is then exactly zero and would otherwise collapse the scale.

The zone-step score $Z_{z,t} = \max_b \max(s_t^g, s_t^{u_{c(z)}}, s_t^{v_z})$ is smoothed and thresholded:

$$\tilde{Z}_{z,t} = \frac{1}{w} \sum_{k=-\lfloor w/2 \rfloor}^{\lceil w/2 \rceil - 1} Z_{z,t+k}, \qquad \mathrm{flag}_{z,t} = \mathbb{1}\left[\tilde{Z}_{z,t} > \gamma_q\right], \tag{19}$$

with $\gamma_q$ the $q$-quantile of $\tilde{Z}$ on zone-steps more than 53 steps (about 9 h, half the support of the widest band) from any rule state in the zone and from any multi-zone rule state in the system. Flag runs of at least three steps, merged across gaps of up to $g_{\max}$ steps, are the detector's events; those that overlap no rule item are *detector-only candidates*. The setting $(w, q, g_{\max}) = (24, 99.9\%, 12)$, i.e. 4 h smoothing, was chosen on development data like the settings of every compared detector (Section 5). The phase alignment and the centred smoothing use future steps, so the detector is retrospective: an offline catalogue builder, not a real-time alarm.

### *4.7. End model and fusion*

The end model learns the label-model posteriors from features that every item has: structure (duration, numbers of zones and cities), shares of each per-step state, the dynamics of $\rho$ before, during and after the item, calendar, adjacency to fills, episode context and the detector's level and band scores. Rule items carry their posterior $q_i$ as a soft target, normal windows carry the target N, and detector-only candidates are unlabelled. A LightGBM classifier [15] minimises the soft-label cross-entropy

$$\mathcal{L} = -\frac{1}{n} \sum_i \sum_y q_i(y) \log f(y \mid \boldsymbol{\phi}_i), \tag{20}$$

and predicts out of fold, with folds grouped by episode. The fusion is a weighted product of the two experts [16], restricted to the feasible set:

$$p_i(y) \propto \mathbb{1}[y \in \mathcal{Y}(i)]\; q_i(y)^{\beta}\, f(y \mid \boldsymbol{\phi}_i)^{1-\beta}. \tag{21}$$

Each expert carries evidence the other lacks (rule votes; detector and context features), so either can change the winning type. The weight $\beta$ is tuned on the training period of the injected data (Section 5); the real southern catalogue uses $\beta = 0.6$, selected at 3% contamination. Marrakech lies outside the injection benchmark and keeps the untuned default $\beta = 0.5$. This is harmless:

the two experts agree on 53 of its 55 items, and labels are identical for all $\beta \geq 0.4$; lower values move at most two items from G3 to G4. The end model abstains ($p = q$) on items whose label-model class has fewer than three items of training mass, and detector-only candidates use a uniform $q$, so their type follows $f$. Clock and transfer items keep their label-model posterior.

### *4.8. Type-aware cleaning*

Cleaning changes only flagged zone-steps (dead, held or straight-line states inside a qualifying run). Four strategies are compared: S0 keeps the raw data; S1 interpolates every flagged run linearly, outages included; S2, the type-aware strategy, uses the catalogue; S3 is an oracle that uses the true types and exists only for injected data. In S2, artefact steps (A1–A3) are imputed from the expected value, rescaled so that the imputation joins the observed series at both edges:

$$\tilde{x}_{z,t} = \hat{x}_{z,t}\Big[(1 - \lambda_t)\,\bar{r}_{\mathrm{L}} + \lambda_t\,\bar{r}_{\mathrm{R}}\Big], \tag{22}$$

where $\bar{r}_{\mathrm{L}}$ and $\bar{r}_{\mathrm{R}}$ are the median ratios $x/\hat{x}$ of up to three valid steps within 6 h before and after the gap, and $\lambda_t$ rises linearly from 0 to 1 across it. Grid-event steps (G1–G5) are kept as recorded, marked by an event indicator that the forecaster reads, and excluded from its training loss. Items labelled N, clock and transfer items and detector-only candidates are left unchanged.

## 5. Experimental design

Detection and attribution are measured on injected events, and the value of the catalogue downstream.

### *5.1. Injection benchmark*

Events are written into the real southern series inside *clean zone-time*: zone-steps more than 53 steps from any rule state, after a 35-day burn-in and away from clock-change days. Table 4 lists the nine types; two untyped ones probe the detector where no rule fires. Events are placed in random type order, without overlap, until they cover 1, 3 or 7% of the clean zone-steps. The benchmark favours the rules: the injected artefacts copy the episodes from which the rules were written, and the ramp and overshoot of injected grid events are hypotheses that the real data do not confirm (Sections 6 and 7).

Table 4: Injected event types. Durations are log-uniform in the range, except G4 (uniform). $\hat{x}$: expected value (Eq. (1)); $U(a, b)$: uniform draw. Artefact signatures are copied from real episodes; grid-event signatures follow the hypothesised physics of Section 3.4. Each event blocks its zones for ±12 h, and a multi-city event blocks the whole system for ±3 h. Clock errors (A4) and load transfers (G5) are not injected: their rules are calendar-gated or act on whole days.

| Type | Zones | Duration | Injected signature |
|---|---|---|---|
| A1 | all zones of 2–3 cities | 0.5–24 h | exact zeros |
| A2 | 2 or more zones of one city (50%), one city (25%) or 2–3 cities (25%) | 1–48 h | each zone held at its last value or interpolated by a straight line (50/50); a whole-city fill is followed by an A1 zero fill with probability 0.5 |
| A3 | one zone | 1–6 h | hold or straight-line fill |
| G1 | all zones of 2 cities | 1–18 h | noise floor $\hat{x} \cdot U(0, 0.03)$ with 0–30% exact zeros; linear ramp of 20–90 min; overshoot $\omega \sim U(1.1, 1.5)$ decaying over 1–2 h |
| G2 | all zones of one city | 20 min–6 h | as G1 |
| G3 | one zone, any hour | 1–48 h | as G1 |
| G4 | one zone, start 06:00–11:59, 70% at weekends | 1–6 h | noise floor as G1; ramp of 10–30 min; no overshoot |
| U_SHOCK | all zones of 2–3 cities | 0.5–4 h | scaled by $U(0.5, 0.8)$; no rule fires |
| U_PARTIAL | one zone | 1–8 h | scaled by $U(0.10, 0.45)$, above the dead threshold |

The predictors are not retrained: cross-fitted on the real series, they predict every injected step from the other half of the real data. The rule engine, label model and end model are re-run on each injected dataset as on the real data. Every design choice was made on five development datasets: 3% with seeds 100–102, 1% with seed 103 and 7% with seed 104. The 30 test datasets (three rates × seeds 0–9; 8,526 events) were used for no choice. Results refer to the test period, July 2023 to May 2024; the earlier period serves only to tune $\beta$.

### *5.2. Methods compared*

Detection compares the rule engine alone, the main detector alone and the full method (rule items plus detector-only candidates) with three classical baselines, STL [17, 18] with a daily period, scored by the robust $z$-

score of its remainder (Eq. (18)), and Isolation Forest [19] and LOF [20] on five per-step features of $\rho$, and with two deep multivariate detectors: GDN [11], attention forecasting over a learned graph and the published method closest to our graph component, and USAD [21], two adversarially trained autoencoders. Both use their authors' released settings and are trained like our predictors. Ablations change one component of the main detector: the learned graph (removed), the predictor (LightGBM), the scales (raw band only), the hierarchy (flat zone score) or the event formation (the untuned setting $(w, q, g_{\max}) = (1, 99.5\%, 1)$).

Every detector, baselines included, receives its own event formation: the best of the same 48 settings of $(w, q, g_{\max})$ by mean event F1 on the development datasets. Ablations inherit the main detector's setting; the no-graph ablation is also reported at its own. The main detector was chosen among four predictors by a criterion fixed beforehand: the development F1 of the rules plus its candidates.

Attribution compares the rules' majority vote, the label model, the end model and the fusion on the typed injected events that the full method detects.

### *5.3. Metrics*

Detection is counted per event, without the point adjustment that inflates scores [22]. With $E$ the injected and $\hat{E}$ the predicted events,

$$P = \frac{|\hat{E}^*|}{|\hat{E}|}, \qquad R = \frac{|E^*|}{|E|}, \qquad F_1 = \frac{2PR}{P+R}, \tag{23}$$
$$\hat{E}^* = \{\hat{e} \in \hat{E} : \hat{e} \cap E \neq \emptyset\}, \qquad E^* = \{e \in E : e \cap \hat{E} \neq \emptyset\},$$

where $\hat{e} \cap E \neq \emptyset$ means that $\hat{e}$ overlaps an injected span in time, its restoration tail included; the zone-strict variant also requires a shared zone. Predictions that touch neither clean zone-time nor an injected span are not scored. A second view also ignores each method's own alarms on the uninjected series, as rule states already are. Step-wise AUC-PR and recall per type are also reported.

Attribution is scored by macro-F1 over the seven typed classes and by the expected calibration error [23] of the arg-max probability over ten equal-width bins $B_b$:

$$\mathrm{ECE} = \sum_{b=1}^{10} \frac{|B_b|}{n} \left|\mathrm{acc}(B_b) - \mathrm{conf}(B_b)\right|. \tag{24}$$

Forecasts $\hat{y}_{z,t}$ are scored on a set $S$ of zone-steps by the mean absolute scaled error [24],

$$\mathrm{MASE} = \frac{1}{|S|} \sum_{(z,t)\in S} a_{z,t}, \qquad a_{z,t} = \frac{|x_{z,t} - \hat{y}_{z,t}|}{s_z}, \tag{25}$$

where $s_z$ is the mean absolute one-day change of zone $z$ on normal training steps. Two strategies are compared by a Diebold–Mariano test [25] on the loss summed over zones, $L_t = \sum_z a_{z,t}$:

$$d_t = L_t^{(1)} - L_t^{(2)}, \qquad \mathrm{DM} = \frac{\bar{d}}{\sqrt{\hat{\Omega}/n}}, \qquad \hat{\Omega} = \hat{\gamma}_0 + 2\sum_{k=1}^{h} \Big(1 - \frac{k}{h+1}\Big)\hat{\gamma}_k, \tag{26}$$

where $\hat{\gamma}_k$ is the lag-$k$ autocovariance of $d_t$, with the Newey–West bandwidth [26] equal to the horizon $h$ because direct forecasts overlap. Outage counts are compared by the ratio of counted to true outage zone-hours and its log distance:

$$r = H/H^{\mathrm{true}}, \qquad \delta = |\log r|. \tag{27}$$

### *5.4. Downstream test*

On the southern system, the cleaning strategies S0–S3 (Section 4.8) feed two forecasters, 1 h and 1 day ahead: a global LightGBM direct forecaster that also reads the event indicator, trained up to 31 December 2023, and a model-free reference (persistence at 1 h, seasonal naive at 1 day). Forecasts are scored from 1 January to 24 May 2024 against the recorded values, on zone-steps that every strategy treats as normal, and separately on those within two days after an anomalous state. Forecasts and outage counts are evaluated on the real data and on all 30 injected test datasets. Naive counting takes every flagged dead state and typed counting only those inside grid-event items; the truth is the injected G1–G4 spans.

### *5.5. Transfer test*

Tetouan tests the method on a new system with nothing re-tuned. The rules, the label-model parameters (applied by one E-step), the architectures, the training settings and the event formation are frozen; the expected value, the score scales, the predictor weights and $\gamma_q$ (at the frozen percentile) are re-estimated from Tetouan's unlabelled series. With one city, G1 is not injected and multi-city types become city-wide. Thirty fresh injected datasets (three rates $\times$ 10 seeds) are scored over 2017.

### *5.6. Statistics and reproducibility*

Results are mean ± standard deviation over the 10 seeds of each rate. Methods are compared by exact paired two-sided Wilcoxon signed-rank tests [27]: the smallest attainable $p$ is 0.002 over 10 seeds and $1.9 \times 10^{-9}$ over 30 datasets. The code uses Python, PyTorch [28], LightGBM 4.6.0 [15] and scikit-learn [29]; every injected dataset is regenerated from its rate and seed, and versions, settings and run times are given in the supplementary material.

## 6. Results

### *6.1. What the telemetry contains*

The rule engine finds 327 items in the real data (126 dead, 155 fill, 33 clock and 13 transfer items), linked into 230 episodes. Straight-line fills, which the initial typology did not anticipate, are the most common fill mechanism: 85 fill items are pure straight lines, 54 pure holds and 16 mixed, and the first difference along a line is constant to about $10^{-14}$. Large events are compound episodes. In January 2023 (Fig. 4) all 15 southern zones are filled from 26 January, with holds in Laâyoune, Boujdour and one Foum El Oued zone and straight lines in the other six; when the Boujdour hold ends on 28 January at 21:10, all 15 zones drop to exact zeros for 13.7 h. The labels are A2, A2 and A1. In the episode of 31 March 2024 (Fig. 5), held zones and zero-filled zones run side by side for 43 h: an acquisition state, not an electrical one.

No regional outage is found. The regional-outage rule never fires, and all three multi-city dead events carry hold or straight-line evidence. The only regional-outage candidate, 16 July 2023, combines exact zeros in Boujdour and Foum El Oued with straight lines in every Laâyoune zone and is labelled an acquisition failure (A1, 0.93). The hypothesised restoration of grid events (Section 3.4) is not supported either: 25 of the 117 southern dead runs (21%) end in a straight line from the last zero to the first reading, so an apparent ramp is often an interpolation, and the learned evidence of the overshoot rule is almost nil ($\log(a/b) = 0.12$, against 1.8–4.8 for every other rule).

The time stamps carry both calendars. The hour 02:00–02:50 is recorded twice at Europe's October clock changes (30 October 2022 and 29 October 2023), and one hour of stamps is missing at Morocco's return to GMT+1 after Ramadan (23 April 2023 and 14 April 2024). A shift of the daily profile is measured reliably only at the European dates: after 30 October 2022 it is $\delta^* = -60$ min in all three cities.

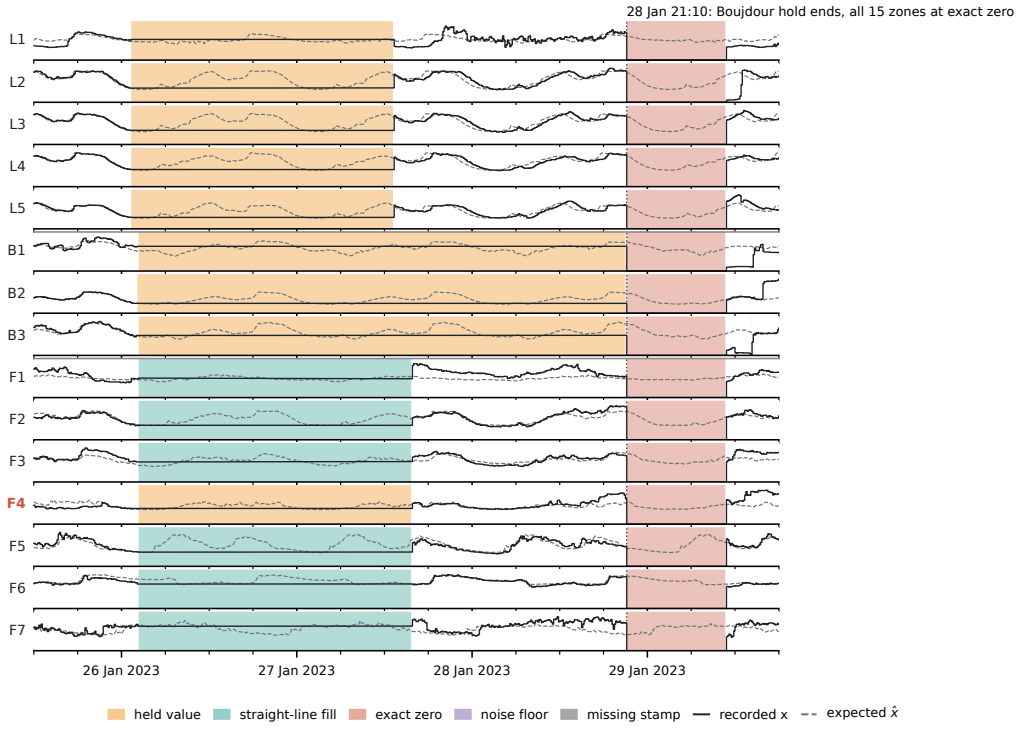



Figure 4: The January 2023 acquisition episode (time stamps as recorded). Simultaneous holds (Laâyoune, Boujdour and F4) and straight-line fills (the other Foum El Oued zones) cover all 15 southern zones from 26 January; when the Boujdour hold ends (28 January, 21:10), all 15 zones drop to exact zeros for 13.7 h. Shading: per-step states; dashed line: expected value. Final labels A2, A2, A1.

Artefacts dominate the anomalous time. Counting every dead state as an outage gives 1,220.5 zone-hours in 117 runs; counting only the items typed as grid events gives 294.0 zone-hours in 79 runs, 4.15 times less. Zero fills (A1) alone account for 926.5 zone-hours.

### *6.2. Weak supervision on the real data*

The constrained label model is stable where the standard one is not: its 20 restarts agree on every item, whereas restarts of the unconstrained Dawid–Skene model agree on as few as 62.7% of the items (mean 83.2%). On votes simulated from the fitted model, it recovers the true types with accuracy 0.922 and macro-F1 0.872 and is calibrated (ECE 0.033); the unconstrained model reaches 0.682, 0.493 and 0.276. Its labels agree with the rules' majority

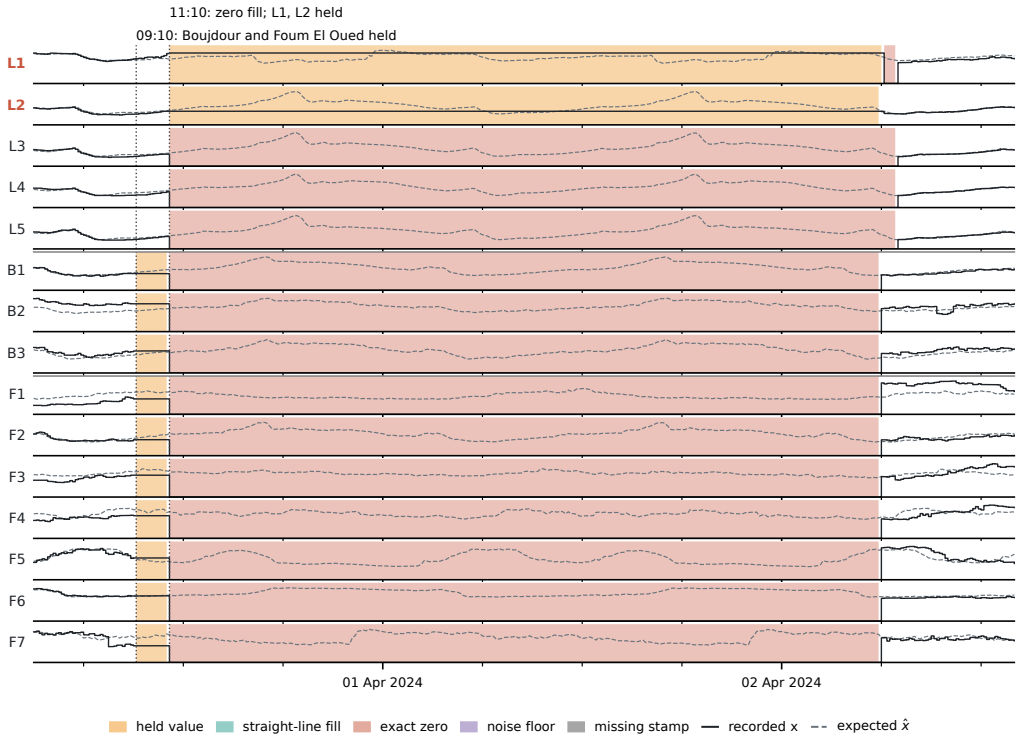



Figure 5: The episode of 31 March – 2 April 2024 (time stamps as recorded): Boujdour and Foum El Oued are held for 2 h, then Boujdour, Foum El Oued and L3–L5 are zero-filled for 43.8 h, and L1 and L2 stay held for the first 43 h of it. Final labels A2, A1, A2, G4; the last item, on L1, shows a limitation of the item-level label model (Section 7).

vote on 98.2% of the items, but they come with probabilities: the mean confidence of the final rule-item labels is 0.937, and 13 items fall below 0.7.

The labels rest on the evidence one would expect. Dropping the straight-line rules changes 98.1% of the fill labels and dropping the calendar rules 38.9% of the dead labels, whereas dropping the simultaneity, restoration or single-zone rules changes none (supplementary material).

The released catalogue holds 404 entries: 327 rule items and 77 detector-only candidates (70 in the southern system, 7 in Marrakech). The rule items are labelled A3 98, G4 70, A2 57, G3 52, A4 14, A1 3, G2 1 and G5 1 (Table 2), and 58 of the 70 southern candidates are untyped (N): partial drops, surges and short disturbances outside the typology.

### *6.3. The residual hierarchy on the real data*

The hierarchy localises outages but not fills (Fig. 6). During the zero fills of January 2023, July 2023 and March 2024, the region part $g$ reaches robust $z$-scores of 218, 230 and 176, while a single-feeder outage moves only the zone part. In this residual, all three multi-city dead items peak at the region level, and 92% of the single-zone dead items at the zone level. Fills behave differently: a hold or a straight line drifts away from each zone's own expected path by a different amount, so the shared part stays small; only 17% of the multi-city fills peak at the region level and 55% of the city-wide fills at the city level. Fills are therefore found by their signatures, through the rules, rather than by the hierarchy, which makes the rules and the detector complementary.

### *6.4. Detection on injected events*

Fig. 7 and Table 5 compare the detectors. The rules alone reach event F1 0.86–0.90 at precision 1.00: they recall every injected type they were written for (city outages 0.90–0.94) and none of the untyped disturbances. The main detector is the best detector alone at 3% and 7% contamination (F1 0.813 and 0.854; Wilcoxon $p = 0.002$ against every other detector at 3%, $p \leq 0.020$ at 7%); at 1% (0.644) it is tied with the other residual detectors and STL ($p = 0.16$–$1.0$) and better than LOF and Isolation Forest. The deep baselines lose to the rules, to the main detector and to STL in every seed at every rate ($p = 0.002$): GDN reaches 0.37–0.71 and USAD 0.29–0.52. GDN finds 96–99% of the multi-city zero gaps but fewer than 2% of the single-zone fills, which are easy to forecast, and on clean data its forecasts are 7–14 times worse than the last value (supplementary material).

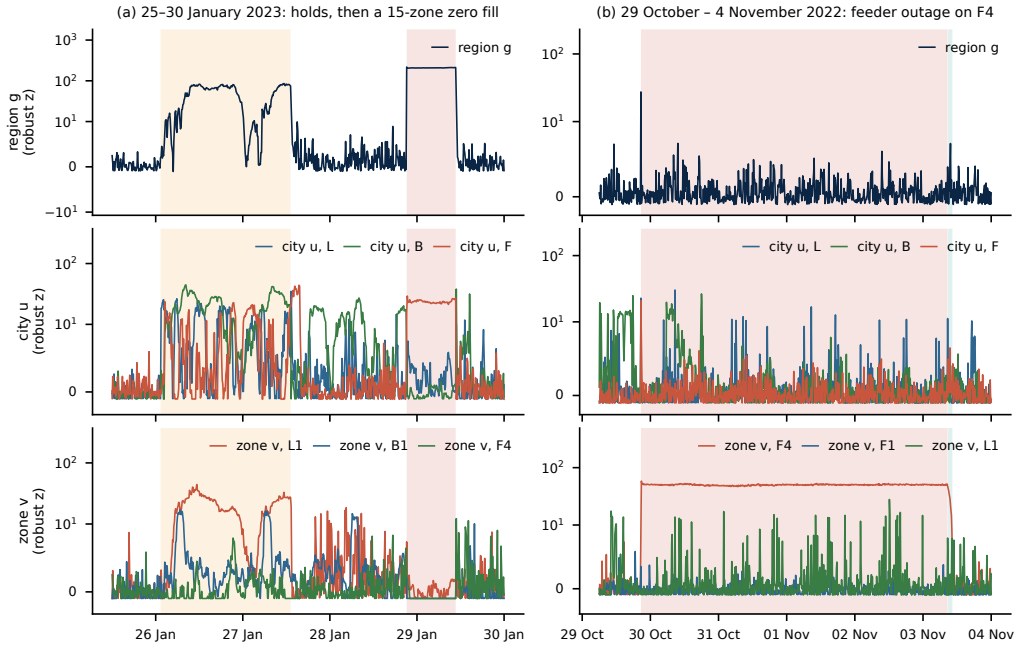



Figure 6: Level scores (robust $z$-scores, Eq. (18)) of the residual hierarchy on the real data. During the January 2023 zero fill the region part $g$ reaches 218, while a feeder outage (F4, October 2022) moves only the zone part $v$. The scores are those of the LightGBM forecast residual, with which the hierarchy was analysed before the main detector was selected; 71% of the rule items peak at their structural level with this residual and 73% with the main detector's TCN-GAT residual.

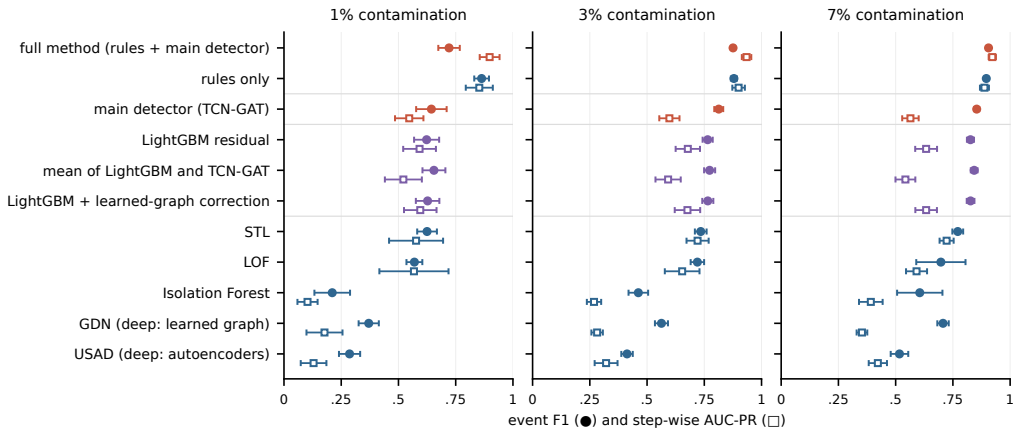



Figure 7: Detection on injected events, test period: event F1 (circles, Eq. (23)) and step-wise AUC-PR (squares), mean ± s.d. over 10 seeds at 1, 3 and 7% contamination. Red: the full method and the main detector; purple: other predictors in the same residual detector; blue: the rules and the baselines, classical and deep. The ablations of the main detector are in Fig. 8.

Adding the detector to the rules raises recall at every rate (0.82–0.84 against 0.76–0.81): it finds 5–30% of the untyped city-wide shocks, 18–22% of the partial drops and the city outages the rules miss. Its effect on F1 depends on how alarms are counted. If every alarm counts, the full method is worse than the rules at 1% (0.721 against 0.863), equal at 3% and better at 7% (0.906 against 0.896, 10 of 10 seeds). If each method's own alarms on the uninjected series are excluded, as the rule states already are, it is better at every rate (0.90–0.91, $p = 0.002$). Under zone-strict matching it is worse at every rate: 25–75% of the detector's extra alarms overlap an injected event in time but on other zones, because a zone left normal while its neighbours drop stands out at the city or region level.

The ablations (Fig. 8) locate the gain. Removing the learned graph leaves F1 equal or slightly higher (+0.027, +0.004 and +0.003): the learned graph adds no detection skill. The tuned event formation contributes most (−0.28, −0.14 and −0.02 without it), followed by the multi-scale bands at low contamination (−0.05 and −0.04 at 1 and 3%). A flat residual instead of the region–city–zone hierarchy does not lower F1 consistently: the hierarchy serves localisation, not detection. Smoothing costs timing: the median onset error is 140–168 min, against 60–70 min for STL.

Table 5: Detection on injected events: the views that Fig. 7 does not show. Test period, mean over 10 seeds at 1 / 3 / 7% contamination. Own background excluded: each method's own alarms on the uninjected series are not scored. Zone-strict: a match also requires a shared zone. Real-data alarms: alarms of the detector alone on the uninjected southern series (full method, i.e. the rules and the main detector: its detector-only candidates). LightGBM residual: the main detector with a LightGBM predictor and its own event formation.

| Method | Precision | Recall | F1, own background excluded | Zone-strict F1 | Real-data alarms |
|---|---|---|---|---|---|
| Full method | 0.65/0.92/0.98 | 0.82/0.83/0.84 | 0.90/0.91/0.91 | 0.63/0.78/0.81 | 70 |
| Rules alone | 1.00/1.00/1.00 | 0.76/0.79/0.81 | 0.86/0.88/0.90 | 0.86/0.87/0.88 | – |
| Main detector | 0.58/0.89/0.98 | 0.73/0.75/0.76 | 0.82/0.84/0.85 | 0.62/0.78/0.81 | 191 |
| LightGBM residual | 0.57/0.82/0.96 | 0.69/0.72/0.73 | 0.79/0.82/0.83 | 0.61/0.74/0.77 | 152 |
| STL | 0.64/0.87/0.97 | 0.62/0.64/0.64 | 0.74/0.76/0.76 | 0.61/0.71/0.71 | 178 |
| LOF | 0.51/0.77/0.91 | 0.66/0.68/0.57 | 0.71/0.76/0.70 | 0.55/0.69/0.64 | 263 |
| Isolation Forest | 0.14/0.37/0.65 | 0.48/0.63/0.57 | 0.39/0.63/0.65 | 0.17/0.42/0.53 | 457 |
| GDN | 0.27/0.52/0.78 | 0.60/0.62/0.65 | 0.68/0.70/0.74 | 0.29/0.46/0.57 | 366 |
| USAD | 0.23/0.49/0.76 | 0.38/0.36/0.39 | 0.43/0.45/0.48 | 0.23/0.35/0.41 | 243 |

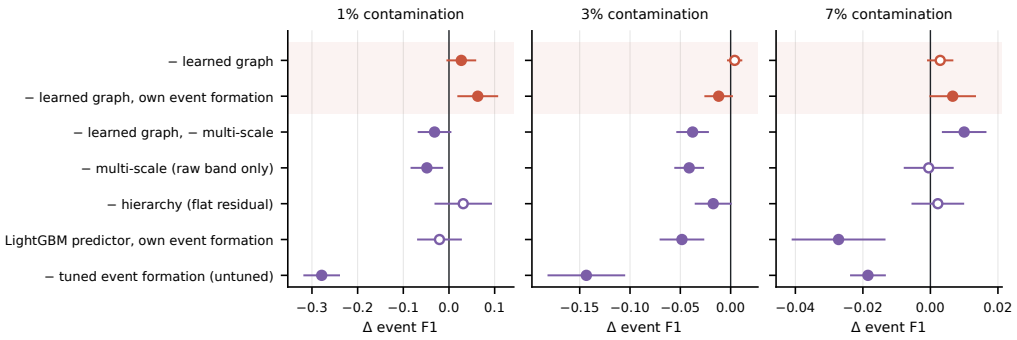



Figure 8: Ablations of the main detector: change in event F1 relative to the main detector (mean ± s.d. of the per-seed differences over 10 seeds, test period; filled markers: Wilcoxon $p < 0.05$; the horizontal scales differ by rate). The learned-graph ablation (shaded) leaves F1 equal or slightly higher; the multi-scale bands and the tuned event formation carry the gain.

Table 6: Attribution of the injected events detected by the full method (test period; macro-F1 over the seven typed classes, mean ± s.d. over 10 seeds, and the mean expected calibration error, Eq. (24)). Majority vote gives no probabilities.

| | Macro-F1 | | | ECE | | |
|---|---|---|---|---|---|---|
| Labeller | 1% | 3% | 7% | 1% | 3% | 7% |
| Majority vote | 0.940 ± 0.054 | 0.921 ± 0.029 | 0.913 ± 0.015 | – | – | – |
| Label model $q$ | 0.934 ± 0.055 | 0.914 ± 0.029 | 0.900 ± 0.017 | 0.068 | 0.089 | 0.099 |
| End model $f$ | 0.845 ± 0.071 | 0.874 ± 0.025 | 0.902 ± 0.018 | 0.107 | 0.078 | 0.061 |
| Fusion $p$ | 0.944 ± 0.037 | 0.919 ± 0.023 | 0.906 ± 0.019 | 0.074 | 0.090 | 0.100 |

### *6.5. Attribution*

On the injected events that the full method detects, every labeller reaches macro-F1 0.85–0.94 (Table 6). The label model does not beat the rules' majority vote on these signatures (0.900–0.934 against 0.913–0.940), the fusion matches both (0.906–0.944), and the end model alone is weaker at low contamination. What weak supervision adds is a calibrated probability for each label: the expected calibration error of the label model and of the fusion stays between 0.07 and 0.10 without recalibration (Fig. 9b). End to end, 0.90–0.95 of the typed injected events are both detected and correctly typed.

One confusion dominates (Fig. 9a): at 3%, 44 of 160 zero-fill gaps (A1) are labelled regional outages (G1). The injected gaps drop to exactly zero in several cities at once, the simultaneity rules vote for a regional event, and nothing else separates the two; the real multi-city gaps also carry fill evidence, which the injector does not copy. Without the simultaneity rules the label model's A1 accuracy would rise from 0.70 to 0.83 and its macro-F1 from 0.914 to 0.941; we report this but do not adopt it, because it was observed on the test seeds. The other classes reach F1 0.86–0.99; feeder outages are sometimes taken for planned work (15 of 123).

### *6.6. Outage statistics and forecasting*

On the injected data, where the truth is known, naive counting overstates outage zone-hours $1.88 \pm 0.32$ times and typed counting $1.26 \pm 0.24$ times (Fig. 10c). Typed counting is closer to the truth in all 30 datasets ($p = 1.9 \times 10^{-9}$) and recovers 99.8% of the true outage zone-steps, and 99.98% of its remaining excess lies inside injected zero-fill gaps: it is the A1-to-G1 confusion of Section 6.5, and nothing else. Interpolation (S1) erases outages

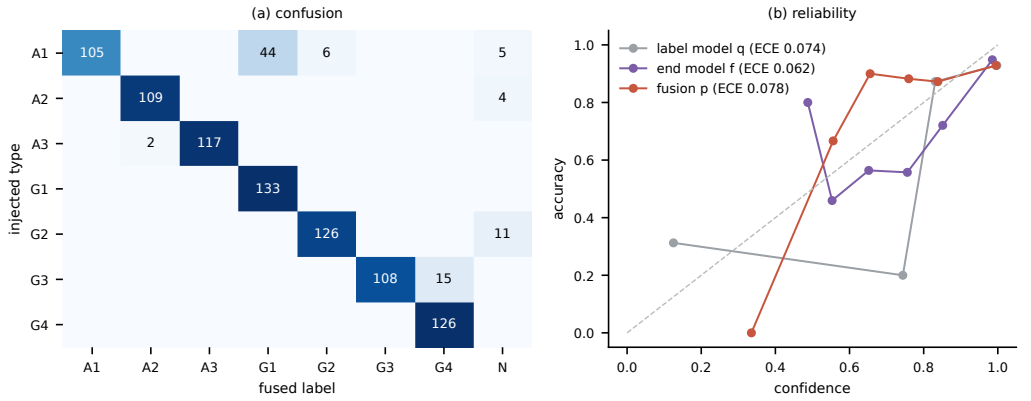



Figure 9: Attribution on injected events (3%, test period, seeds pooled): (a) confusion of the injected type and the fused label; (b) reliability of the label model $q$, the end model $f$ and the fusion $p$.

from the record altogether. On the real data, the two counts differ 4.15-fold (Section 6.1).

Type-aware cleaning also gives the most accurate forecasts when the forecaster reads the event indicator (Table 7, Fig. 10a–b). On the real data, the clearest gain is one hour ahead after an anomaly: the LightGBM MASE falls from 0.656 (raw) and 0.661 (interpolated) to 0.613 (DM $p < 0.001$ against interpolation). The day-ahead gain is larger, from 1.501 and 1.233 to 1.061, but not significant ($p = 0.22$), because a few multi-zone events carry it. On the 30 injected datasets, S2 gives the lowest LightGBM error in 28–30 of them (Wilcoxon $p \leq 5 \times 10^{-6}$) and comes within 0.006 MASE of the oracle S3. Over all test steps the effect is small, about 1% against interpolation on the real data, because anomalies are rare. With the model-free reference the order changes: persistence and seasonal naive copy a kept outage into the next hour or day, so interpolation forecasts better (S1 beats S2 in all 30 datasets at 1 h), at the price of erasing the outages from the statistics.

### *6.7. Transfer to Tetouan*

Tetouan tests the frozen method on another city and year (Fig. 11). On the real 2017 series the rules raise no dead or fill item, and the four clock-change dates they examine are all labelled normal; the main detector raises 7 alarms in the year, 0.20 per zone-month, against 72 for Isolation Forest. On the injected datasets the full method reaches event F1 0.945, 0.919 and 0.890

Table 7: Forecast error (MASE, Eq. (25)) by cleaning strategy, test period 1 January – 24 May 2024. After: steps within two days after an anomalous state in the zone; all: every scored step. Real data: S0 / S1 / S2 and the Diebold–Mariano $p$ of S1 against S2. Injected: S0 / S1 / S2 / S3, mean over the 30 test datasets, and the number of datasets in which S2 beats S1 with the Wilcoxon $p$ (S1 is better when the number is below 15).

| | | | Real data | | Injected data (30 datasets) | |
|---|---|---|---|---|---|---|
| Forecaster | Horizon | Steps | S0 / S1 / S2 | DM $p$ | S0 / S1 / S2 / S3 | S2 better (p) |
| LightGBM | 1 h | after | 0.656/0.661/0.613 | <0.001 | 0.696/0.636/0.625/0.619 | 29 (4e-6) |
| LightGBM | 1 h | all | 0.654/0.657/0.654 | 0.019 | 0.653/0.625/0.625/0.620 | 28 (4e-6) |
| LightGBM | 1 day | after | 1.501/1.233/1.061 | 0.22 | 1.295/1.140/1.058/1.052 | 29 (5e-7) |
| LightGBM | 1 day | all | 1.140/1.115/1.102 | 0.25 | 1.174/1.076/1.052/1.051 | 29 (3e-6) |
| Naive | 1 h | after | 1.081/1.059/1.052 | 0.44 | 0.995/0.920/0.939/0.923 | 0 (2e-9) |
| Naive | 1 day | after | 2.220/1.553/1.278 | 0.16 | 2.036/1.377/1.499/1.448 | 10 (6e-4) |

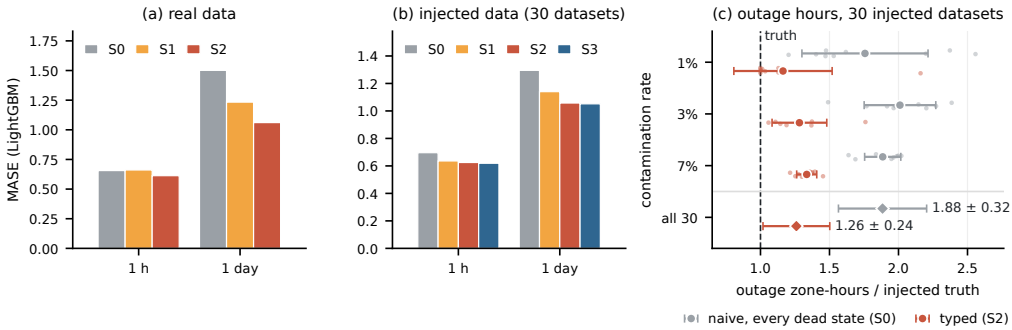



Figure 10: Downstream test. LightGBM forecast error (MASE) by cleaning strategy on test steps within two days after an anomaly, (a) real data and (b) injected data (mean of 30 datasets); test period 1 January – 24 May 2024. (c) Outage zone-hours relative to the injected truth under naive (S0) and typed (S2) counting on the 30 injected datasets (points: seeds; markers: mean ± s.d.). Interpolation (S1) reports no outage.

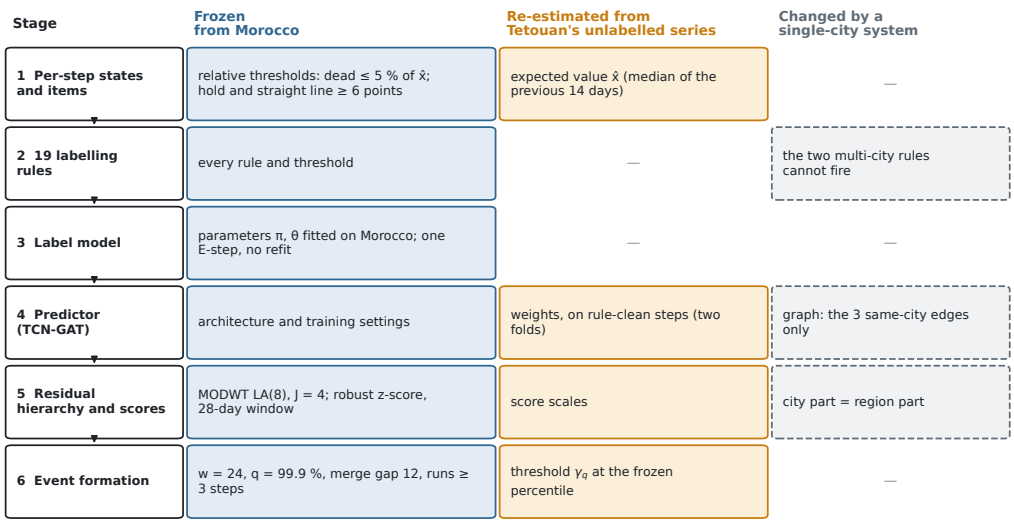



Figure 11: Transfer protocol, stage by stage: what is frozen from the Moroccan system (blue), what is re-estimated from Tetouan's unlabelled series (orange) and what a single-city system changes (grey, dashed). No setting is tuned on Tetouan.

at 1, 3 and 7% contamination, at precision 0.98–1.00 (Table 8, Fig. 12a), and beats the rules alone (0.856–0.861) in every seed at every rate ($p = 0.002$). The main detector alone is the best detector at 1% (0.857). At 3% LightGBM and STL overtake it ($p = 0.002$ and 0.004), and at 7% LightGBM and Isolation Forest ($p = 0.006$ and 0.002): on one year of three zones, the neural predictor forecasts four times worse than LightGBM (MAE 0.045 against 0.011).

Attribution transfers except for one class (Fig. 12b). The frozen label model reaches macro-F1 0.77–0.79, and 0.95–0.98 without A1: 348 of 417 injected zero-fill gaps are read as city outages, with confidence above 0.98, so for this class the calibration observed in Morocco does not transfer. In Morocco, a gap is told from an outage by its zeros in several cities at once; in a single city this evidence cannot exist.

## 7. Discussion

[To be written.]

Table 8: Transfer to Tetouan without re-tuning (event F1 in Fig. 12a). Injected data: mean over 10 seeds at 1 / 3 / 7% contamination. Full method: the rules and the main detector. No graph: the main detector without the learned graph (same event formation). Real alarms: items or alarms raised on the real 2017 series (clock items labelled N excluded).

| Method | Precision | Recall | AUC-PR | Real alarms |
|---|---|---|---|---|
| Full method | 0.98 / 1.00 / 1.00 | 0.91 / 0.85 / 0.80 | 0.95 / 0.95 / 0.95 | 7 |
| Rules alone | 1.00 / 1.00 / 1.00 | 0.75 / 0.76 / 0.75 | 0.88 / 0.89 / 0.88 | 0 |
| Main detector | 0.98 / 1.00 / 1.00 | 0.76 / 0.66 / 0.57 | 0.75 / 0.66 / 0.69 | 7 |
| Main detector, no graph | 0.99 / 1.00 / 1.00 | 0.72 / 0.65 / 0.55 | 0.52 / 0.57 / 0.61 | 9 |
| LightGBM residual | 0.75 / 0.98 / 1.00 | 0.79 / 0.78 / 0.62 | 0.84 / 0.82 / 0.83 | 15 |
| STL | 0.77 / 0.97 / 1.00 | 0.72 / 0.72 / 0.59 | 0.80 / 0.78 / 0.81 | 13 |
| Isolation Forest | 0.35 / 0.61 / 0.90 | 0.81 / 0.81 / 0.73 | 0.42 / 0.54 / 0.66 | 72 |
| LOF | 0.76 / 0.90 / 0.70 | 0.73 / 0.62 / 0.12 | 0.66 / 0.59 / 0.29 | 11 |

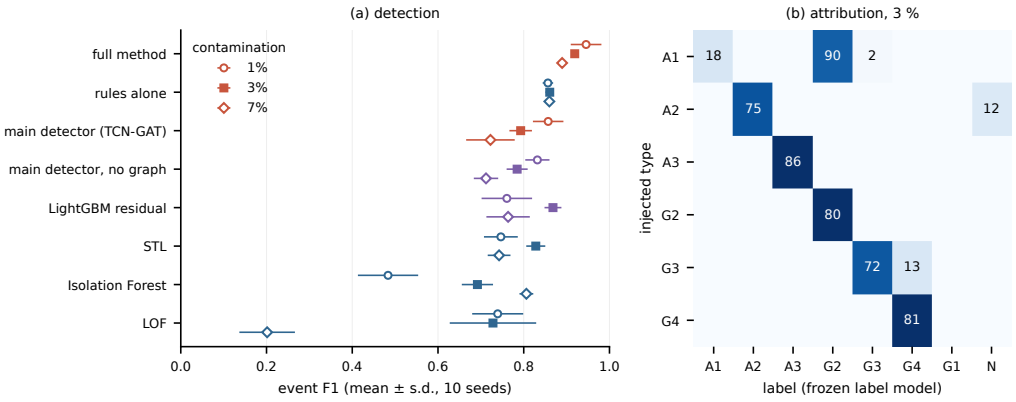



Figure 12: Transfer to Tetouan without re-tuning: (a) event F1 of every method at 1, 3 and 7% contamination; (b) confusion of the frozen label model at 3%. City-wide zero gaps (A1) are read as city outages (G2).

## 8. Conclusions

[To be written.]

## Data and code availability

The UCI datasets analysed in this study are publicly available [1, 4]. The Moroccan data are the file `Data Morocco.xlsx` of the UCI record (22,434,854 bytes; SHA-256, in groups of eight hexadecimal digits: `507134d6 7ecbbddb f17640e1 937da132 d0db8000 fbfd32a8 8dda9a4c bf53c6fc`), byte-identical to the file served by the repository on 14 November 2026. The code, the typed event catalogue and all results will be made publicly available. [Repository and archive identifiers to be added.]

## CRediT authorship contribution statement

[To be added by the authors.]

## Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Funding

[To be added by the authors.]

## References

[1] M. Bensalah, A. Hair, High-resolution load dataset from smart meters across various cities in Morocco, UCI Machine Learning Repository (2025). `doi:10.24432/C5FC8R`.
URL `https://archive.ics.uci.edu/dataset/1158`

[2] M. Bensalah, A. Hair, R. Rabie, H. Derrouz, High-resolution smart meter load dataset collected from multiple cities in Morocco, Data in Brief 62 (2025) 112067. `doi:10.1016/j.dib.2025.112067`.

[3] M. Bensalah, A. Hair, Machine learning-driven load forecasting for urban energy optimization in Morocco, OPSEARCH 63 (2) (2025) 948–969. doi:10.1007/s12597-025-00950-w.

[4] A. Salam, A. El Hibaoui, Power consumption of Tetouan city, UCI Machine Learning Repository (2018). doi:10.24432/C5B034.
URL https://archive.ics.uci.edu/dataset/849

[5] A. Salam, A. El Hibaoui, Comparison of machine learning algorithms for the power consumption prediction: Case study of Tetouan city, in: 2018 6th International Renewable and Sustainable Energy Conference (IRSEC), IEEE, 2018, pp. 1–5. doi:10.1109/IRSEC.2018.8703007.

[6] A. Ratner, S. H. Bach, H. Ehrenberg, J. Fries, S. Wu, C. Ré, Snorkel: Rapid training data creation with weak supervision, Proceedings of the VLDB Endowment 11 (3) (2017) 269–282. doi:10.14778/3157794.3157797.

[7] A. P. Dawid, A. M. Skene, Maximum likelihood estimation of observer error-rates using the EM algorithm, Applied Statistics 28 (1) (1979) 20–28. doi:10.2307/2346806.

[8] Y. Zhang, X. Chen, D. Zhou, M. I. Jordan, Spectral methods meet EM: A provably optimal algorithm for crowdsourcing, Journal of Machine Learning Research 17 (102) (2016) 1–44.
URL http://jmlr.org/papers/v17/14-511.html

[9] S. Bai, J. Z. Kolter, V. Koltun, An empirical evaluation of generic convolutional and recurrent networks for sequence modeling, arXiv preprint arXiv:1803.01271 (2018). doi:10.48550/arXiv.1803.01271.

[10] P. Veličković, G. Cucurull, A. Casanova, A. Romero, P. Liò, Y. Bengio, Graph attention networks, in: International Conference on Learning Representations (ICLR), 2018. doi:10.48550/arXiv.1710.10903.

[11] A. Deng, B. Hooi, Graph neural network-based anomaly detection in multivariate time series, Proceedings of the AAAI Conference on Artificial Intelligence 35 (5) (2021) 4027–4035. doi:10.1609/aaai.v35i5.16523.

[12] P. J. Huber, Robust estimation of a location parameter, The Annals of Mathematical Statistics 35 (1) (1964) 73–101. doi:10.1214/aoms/1177703732.

[13] D. B. Percival, A. T. Walden, Wavelet Methods for Time Series Analysis, Cambridge University Press, Cambridge, 2000. doi:10.1017/CBO9780511841040.

[14] P. J. Rousseeuw, C. Croux, Alternatives to the median absolute deviation, Journal of the American Statistical Association 88 (424) (1993) 1273–1283. doi:10.1080/01621459.1993.10476408.

[15] G. Ke, Q. Meng, T. Finley, T. Wang, W. Chen, W. Ma, Q. Ye, T.-Y. Liu, LightGBM: A highly efficient gradient boosting decision tree, in: Advances in Neural Information Processing Systems, Vol. 30, Curran Associates, Inc., 2017.
URL https://proceedings.neurips.cc/paper_files/paper/2017/file/6449f44a102fde848669bdd9eb6b76fa-Paper.pdf

[16] G. E. Hinton, Training products of experts by minimizing contrastive divergence, Neural Computation 14 (8) (2002) 1771–1800. doi:10.1162/089976602760128018.

[17] R. B. Cleveland, W. S. Cleveland, J. E. McRae, I. Terpenning, STL: A seasonal-trend decomposition procedure based on loess, Journal of Official Statistics 6 (1990) 3–73.

[18] S. Seabold, J. Perktold, Statsmodels: Econometric and statistical modeling with Python, in: Proceedings of the 9th Python in Science Conference, 2010, pp. 92–96. doi:10.25080/Majora-92bf1922-011.

[19] F. T. Liu, K. M. Ting, Z.-H. Zhou, Isolation forest, in: 2008 Eighth IEEE International Conference on Data Mining, 2008, pp. 413–422. doi:10.1109/ICDM.2008.17.

[20] M. M. Breunig, H.-P. Kriegel, R. T. Ng, J. Sander, LOF: Identifying density-based local outliers, in: Proceedings of the 2000 ACM SIGMOD International Conference on Management of Data, 2000, pp. 93–104. doi:10.1145/342009.335388.

[21] J. Audibert, P. Michiardi, F. Guyard, S. Marti, M. A. Zuluaga, USAD: UnSupervised anomaly detection on multivariate time series, in: Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, 2020, pp. 3395–3404. doi:10.1145/3394486.3403392.

[22] S. Kim, K. Choi, H.-S. Choi, B. Lee, S. Yoon, Towards a rigorous evaluation of time-series anomaly detection, in: Proceedings of the AAAI Conference on Artificial Intelligence, Vol. 36, 2022, pp. 7194–7201. doi:10.1609/aaai.v36i7.20680.

[23] C. Guo, G. Pleiss, Y. Sun, K. Q. Weinberger, On calibration of modern neural networks, in: Proceedings of the 34th International Conference on Machine Learning, Vol. 70 of Proceedings of Machine Learning Research, PMLR, 2017, pp. 1321–1330.
URL https://proceedings.mlr.press/v70/guo17a.html

[24] R. J. Hyndman, A. B. Koehler, Another look at measures of forecast accuracy, International Journal of Forecasting 22 (4) (2006) 679–688. doi:10.1016/j.ijforecast.2006.03.001.

[25] F. X. Diebold, R. S. Mariano, Comparing predictive accuracy, Journal of Business & Economic Statistics 13 (3) (1995) 253–263. doi:10.1080/07350015.1995.10524599.

[26] W. K. Newey, K. D. West, A simple, positive semi-definite, heteroskedasticity and autocorrelation consistent covariance matrix, Econometrica 55 (3) (1987) 703–708. doi:10.2307/1913610.

[27] F. Wilcoxon, Individual comparisons by ranking methods, Biometrics Bulletin 1 (6) (1945) 80–83. doi:10.2307/3001968.

[28] A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga, A. Desmaison, A. Kopf, E. Yang, Z. DeVito, M. Raison, A. Tejani, S. Chilamkurthy, B. Steiner, L. Fang, J. Bai, S. Chintala, PyTorch: An imperative style, high-performance deep learning library, in: Advances in Neural Information Processing Systems, Vol. 32, 2019.
URL https://papers.nips.cc/paper_files/paper/2019/hash/bdbca288fee7f92f2bfa9f7012727740-Abstract.html

[29] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, É. Duchesnay, Scikit-learn: Machine learning in Python, Journal of Machine Learning Research 12 (85) (2011) 2825–2830.
URL https://jmlr.org/papers/v12/pedregosa11a.html