Notes on Reward Scaling Laws

Faraz Rahman

December 30, 2025

Contents

1 Intro **1**

2 Sigmoidal Scaling Curves **2**

3 Error Bars **2**

1 Intro

The goal of these notes are to provide some insight on generating / analyzing scaling curves of deep neural networks in environments (i.e. multistep tasks) where we are interested in "S"-shaped metrics like reward/value/returns which have upper and lower bounds.
Some common challanges in this setting are:

- Rewards vs. _____ follow an "S"-curve which is harder to paremetrize than e.g. $\log(\ell_{\text{val}})$ which is linear
- Rollouts are expensive to run, and various scales may require differing number of trials to acheive statistical certainty. Optimal compute allocation can accelerate iteration speed.
- Error is in reward is non symmetric - if average reward is near zero, then your lower-uncertainty should be small.


These notes will primarily centralize tools and code as well as statistical justification from existing work such as Agarwal et al. (2022), Khatri et al. (2025), and Snyder et al. (2025).

2 Sigmoidal Scaling Curves

Rewards are typically bounded $[0, 1]$. As a result, we should not expect scaling laws to be linear on a log scale. Khatri et al. (2025) advise using a sigmoidal curve with the following parametrization.

$$R(C) = A \cdot \frac{1}{1 + (C_{\text{mid}}/C)^B} \tag{1}$$

Where $R(C)$ is the gain in reward (i.e. $R(0) = 0$). There are three parameters: A is the asymptotic reward gain, C_{mid} is the compute budget that defines the midpoint of the performance curve and B is the scaling exponent. Below is a visualization, an interactive Desmos plot can be found https://www.desmos.com/calculator/rctmkfophe.

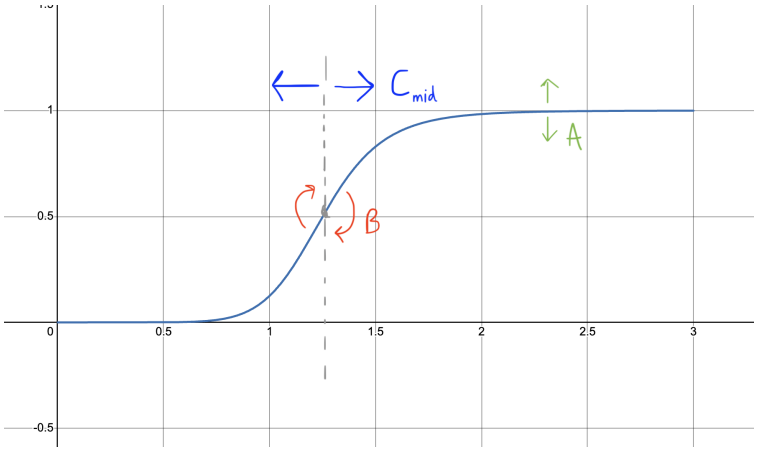

Khatri et al. (2025) find fitting all three parameters to be hard in general so they do a grid search over A, C_{mid} while B is fit and select A, C_{mid} that minimizes the ℓ_2 error. They provide code to help at www.devvrit.com/scalerl_curve_fitting.
Sigmoidal Scaling Curves look like a power law for large C. This is discussed in appendix section A.4 from Khatri et al. (2025).

3 Error Bars

Rewards are non-negative so errors should not be symmetric.

References

Agarwal, R., Schwarzer, M., Castro, P. S., Courville, A., and Bellemare, M. G. (2022). Deep reinforcement learning at the edge of the statistical precipice.

Khatri, D., Madaan, L., Tiwari, R., Bansal, R., Duvvuri, S. S., Zaheer, M., Dhillon, I. S., Brandfonbrener, D., and Agarwal, R. (2025). The art of scaling reinforcement learning compute for llms.

Snyder, D., Hancock, A. J., Badithela, A., Dixon, E., Miller, P., Ambrus, R. A., Majumdar, A., Itkina, M., and Nishimura, H. (2025). Is your imitation learning policy better than mine? policy comparison with near-optimal stopping.