

< Previous

Next >

# Sample solutions

 [Bookmark this page](#)

Since Notebook 6 is an optional assignment, we are releasing these sample solutions concurrently.

part0 (Score: 0.0 / 0.0)

- 1. Test cell (Score: 0.0 / 0.0)
- 2. Test cell (Score: 0.0 / 0.0)
- 3. Test cell (Score: 0.0 / 0.0)
- 4. Test cell (Score: 0.0 / 0.0)

**Important note!** Before you turn in this lab notebook, make sure everything runs as expected:

- First, **restart the kernel** -- in the menubar, select Kernel→Restart.
- Then **run all cells** -- in the menubar, select Cell→Run All.

Make sure you fill in any place that says YOUR CODE HERE or "YOUR ANSWER HERE."

## Part 0: Mining the web

Perhaps the richest source of openly available data today is [the Web \(http://www.computerhistory.org/revolution/networking/19/314\)](http://www.computerhistory.org/revolution/networking/19/314)! In th lab, you'll explore some of the basic programming tools you need to scrape web data.

**Warnings.**

- 1. If you are using one of the cloud-based Jupyter installations to run this notebook, such as [Microsoft Azure Notebooks \(https://notebooks.azure.com\)](https://notebooks.azure.com) or [Vocareum \(https://vocareum.org\)](https://vocareum.org), it's likely you will encounter problems due to restrictions on access to remote servers.
- 2. Even if you are using a home or local installation of Jupyter, you may encounter problems if you attempt to access a site too many times or too rapidly. That can happen if your internet service provider (ISP) or the target website detect your accesses as "unusual" and reject them. It's easy to imagine accidentally writing an infinite loop that tries to access a page and being seen from the other side as a malicious program. :)

## The Requests module

Python's [Requests module \(http://requests.readthedocs.io/en/latest/user/quickstart/\)](http://requests.readthedocs.io/en/latest/user/quickstart/) to download a web page.

For instance, here is a code fragment to download the [Georgia Tech \(http://www.gatech.edu\)](http://www.gatech.edu) home page and print the first 250 character: might also want to [view the source \(http://www.computerhope.com/issues/ch000746.htm\)](http://www.computerhope.com/issues/ch000746.htm) of Georgia Tech's home page to get a nicely formatted view, and compare its output to what you see above.

```
In [1]: import requests


response = requests.get('http://www.gatech.edu/')
webpage = response.text # or response.content for raw bytes


print(webpage[0:250]) # Prints the first hundred characters only

<!DOCTYPE html>
<html lang="en" dir="ltr"
  xmlns:content="http://purl.org/rss/1.0/modules/content/"
  xmlns:dc="http://purl.org/dc/terms/"
  xmlns:foaf="http://xmlns.com/foaf/0.1/"
  xmlns:og="http://ogp.me/ns#"
  xmlns:rdfs="http://www.w3.org/2000
```

**Exercise 1.** Given the contents of the GT home page as above, write a function that returns a list of links (URLs) of the "top stories" on th page.

For instance, on Friday, September 9, 2016, here was the front page:

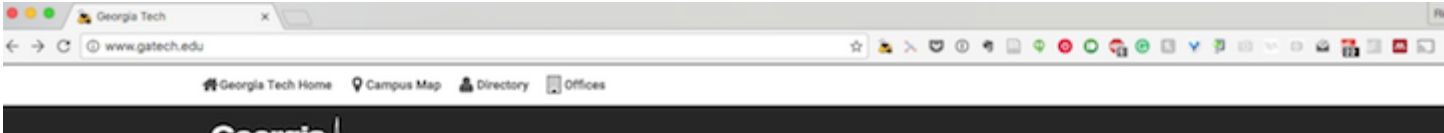

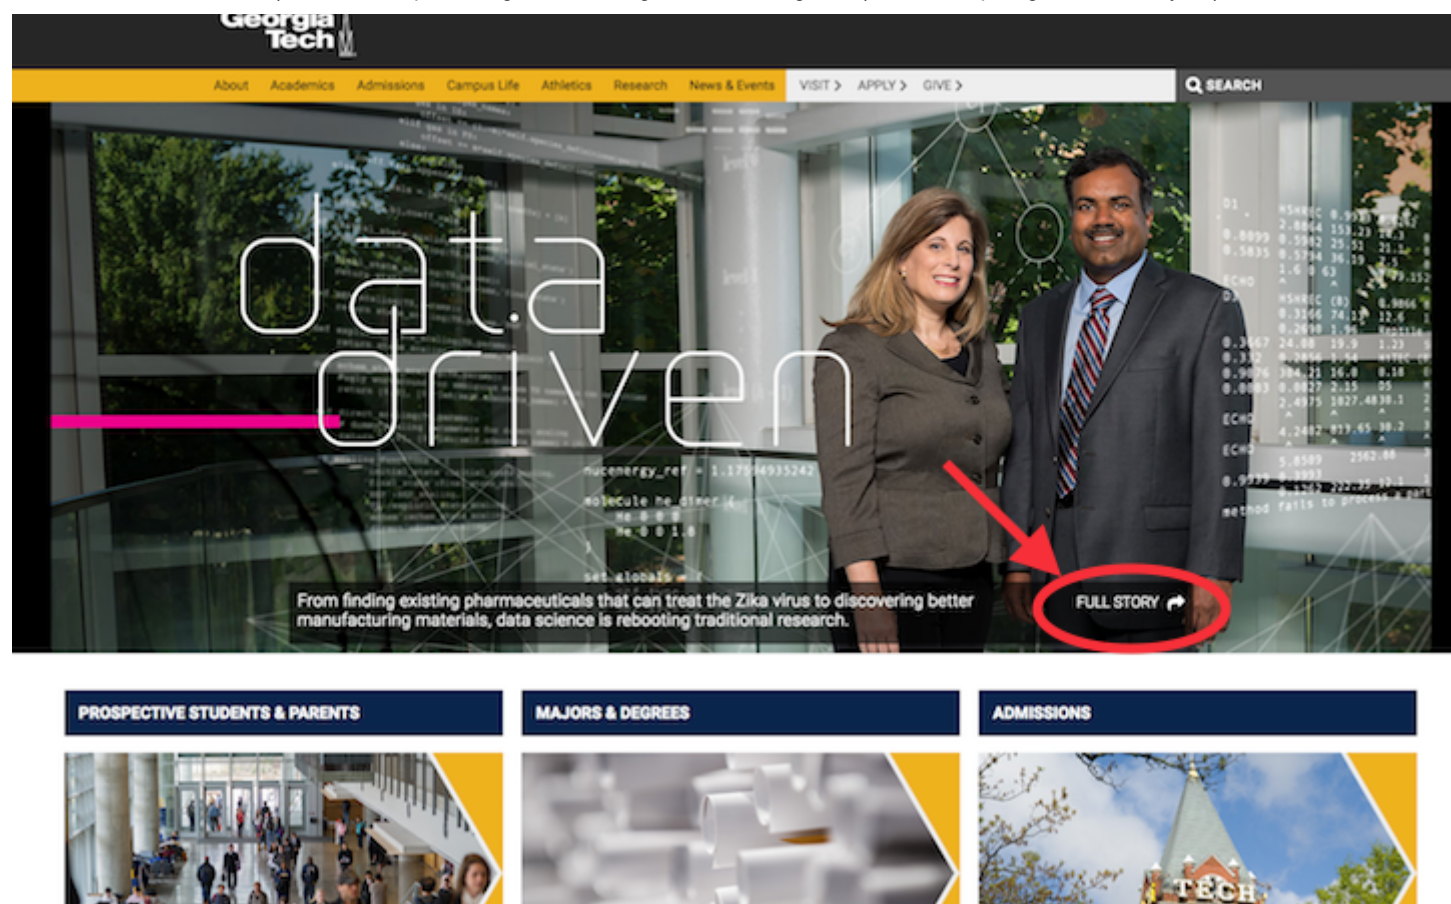

The top stories cycle through in the large image placeholder shown above. We want your function to return the list of URLs behind each "Full Story" links, highlighted in red. If no URLs can be found, the function should return an empty list.

In [2]: Student's answer

```
import re # Maybe you want to use a regular expression?


def get_gt_top_stories(webpage_text):
    """Given the HTML text for the GT front page, returns a list
    of the URLs of the top stories or an empty list if none are
    found.
    """
    pattern = '<a class="slide-link" href="(P<url>[^\"]+)">'
    return re.findall(pattern, webpage_text)
```

In [3]: `top_stories = get_gt_top_stories(webpage)`  
`print("Links to GT's top stories:", top_stories)`

```
Links to GT's top stories: ['http://development.gatech.edu/care-and-feeding-student-startup:
'http://www.rh.gatech.edu/news/595812/engineering-research-center-will-help-expand-use-there:
-based-living-cells']
```

## A more complex example

Go to [Yelp!](http://www.yelp.com) (<http://www.yelp.com>) and look up ramen in Atlanta, GA. Take note of the URL:

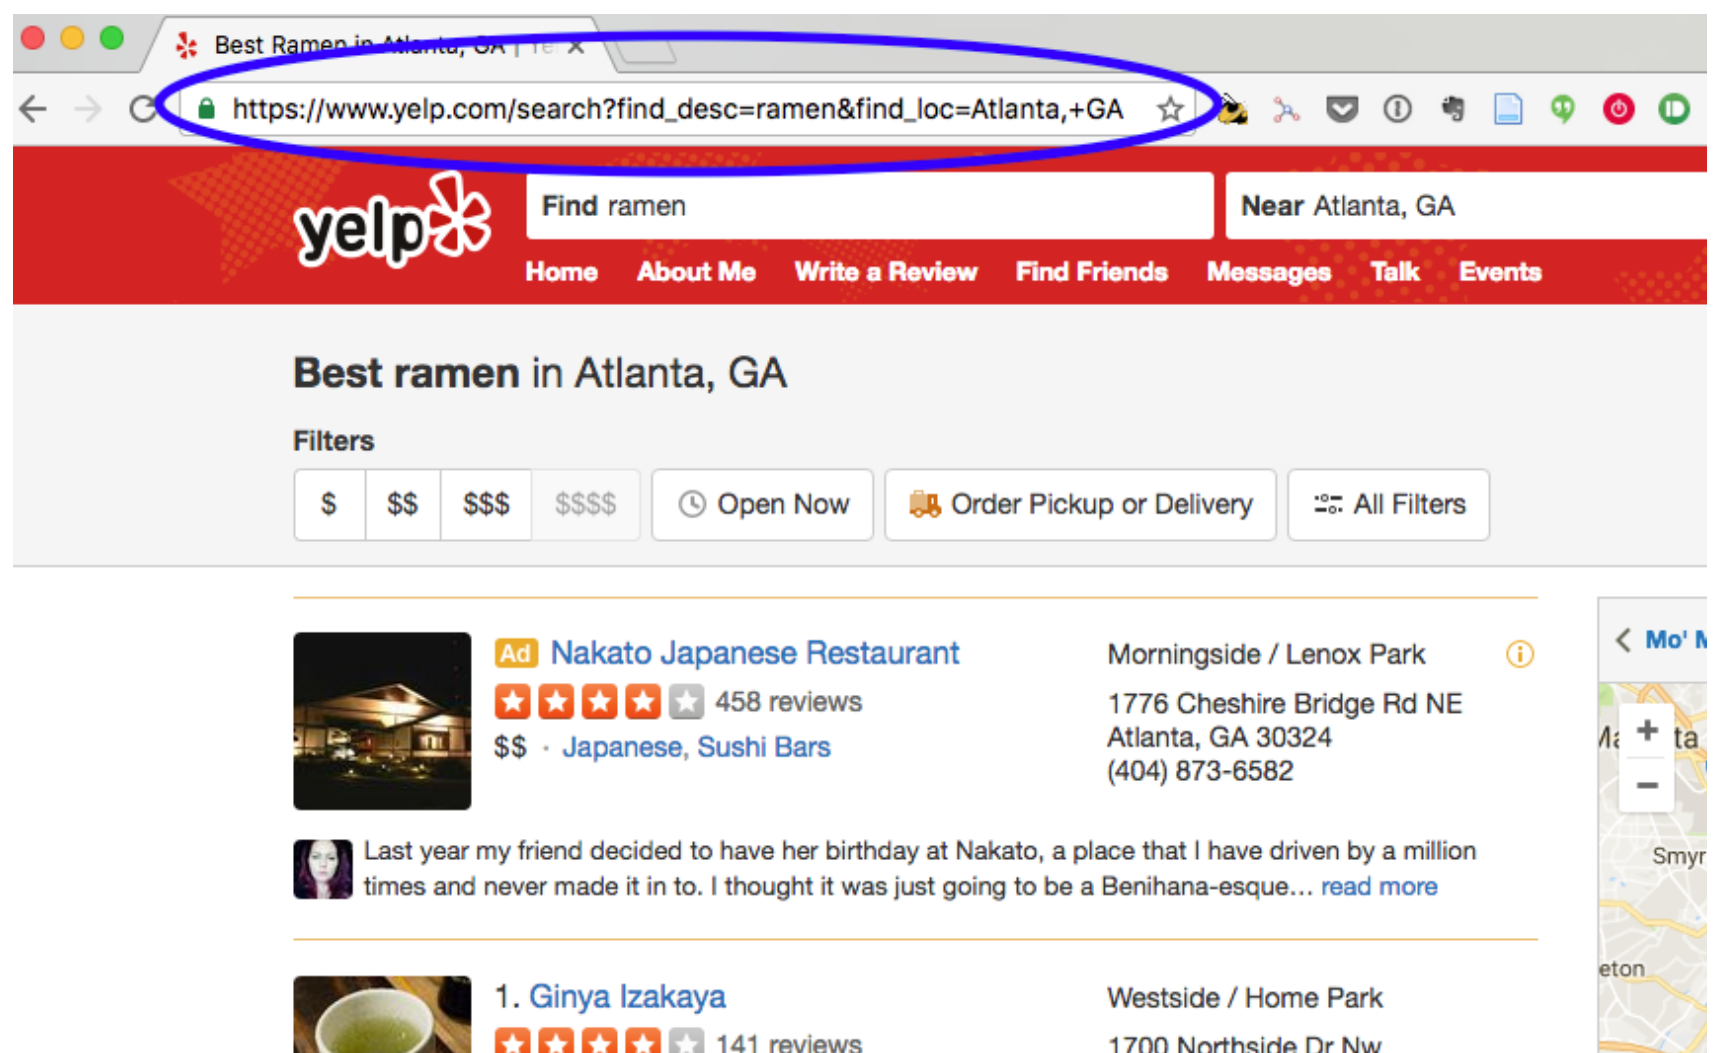





In [6]:

Grade cell: yelp\_atl\_\_test1

Score: 0.0 / 0.0

```
assert find_yelp_item('fried chicken', 'Atlanta, GA', -1) is None # Tests an invalid value 'k'
```

Search queries on Yelp! don't always return the same answers, since the site is always changing! Also, your results might not match a query you do via your web browser (*why not?*). As such, you should manually check your answers.

In [7]:

Grade cell: yelp\_atl\_\_test2

Score: 0.0 / 0.0

```
item = find_yelp_item ('fried chicken', 'Atlanta, GA', 1)
print (item)

# The most likely answer on September 19, 2017:
#assert item in ['Gus’s World Famous <span class="highlighted">Fried</span> <span class="highlighted">Chicken</span>',
#               'Gus’s World Famous Fried Chicken']
```

Gus’s World Famous <span class="highlighted">Fried</span> <span class="highlighted">Chicken</span>

In [8]:

Grade cell: yelp\_atl\_\_test3

Score: 0.0 / 0.0

```
item = find_yelp_item ('fried chicken', 'Atlanta, GA', 5)
print (item)

# The most likely answer on September 19, 2017:
#assert item == 'Richards’ Southern Fried'
```

Colonnade Restaurant

In [9]:

Grade cell: yelp\_atl\_\_test4

Score: 0.0 / 0.0

```
item = find_yelp_item('fried chicken', 'Atlanta, GA', 17)
print(item)

# Most likely correct answer as of September 19, 2017:
#assert item == 'Sway'
```

Buttermilk Kitchen

part1 (Score: 0.0 / 0.0)

- 1. Written response (Score: 0.0 / 0.0)
- 2. Test cell (Score: 0.0 / 0.0)
- 3. Test cell (Score: 0.0 / 0.0)

**Important note!** Before you turn in this lab notebook, make sure everything runs as expected:

- First, **restart the kernel** -- in the menubar, select Kernel → Restart.
- Then **run all cells** -- in the menubar, select Cell → Run All.

Make sure you fill in any place that says YOUR CODE HERE or "YOUR ANSWER HERE."

Part 1: Tools to process HTML

In Part 0, you downloaded real web pages and manipulated them using "conventional" string processing tools, like `str()` functions or `regular expressions()`.

However, web pages are stored in HTML (`hypertext markup language()`), which is a highly structured format. As such, it makes sense to use specialized tools to understand and process its structure. That's the subject of this notebook.


## Parsing HTML: The BeautifulSoup module

One such package to help process HTML is [Beautiful Soup](https://www.crummy.com/software/BeautifulSoup/) (<https://www.crummy.com/software/BeautifulSoup/>). The following is a quick tutorial on how to use it.

Any HTML document may be modeled as an object in computer science known as a [tree](https://en.wikipedia.org/wiki/Tree_(data_structu) ([https://en.wikipedia.org/wiki/Tree\\_\(data\\_structu](https://en.wikipedia.org/wiki/Tree_(data_structu)

# HTML as a tree

HTML is one instance of the Document Object Model (DOM).

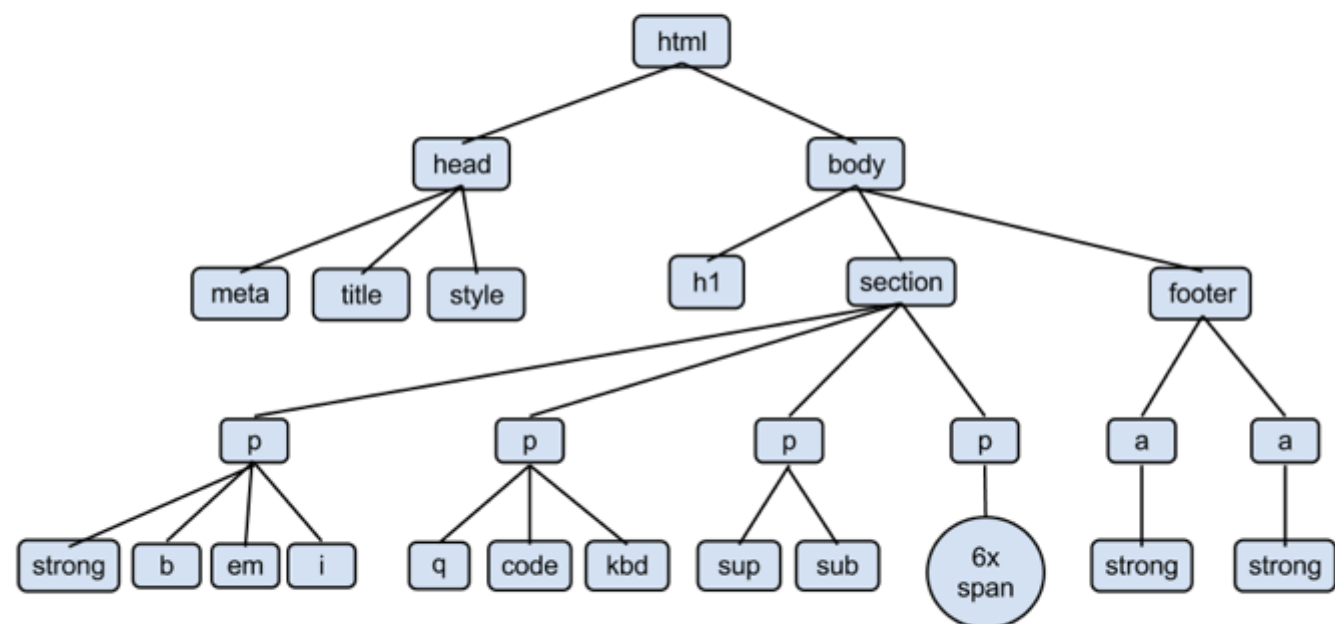

Need to find the tree node containing the elements we want to crawl

Source: [www.openbookproject.net/](http://www.openbookproject.net/)

Fall 2015

CSE 6040 COMPUTING FOR DATA ANALYSIS

6

There are different ways to define trees, but for our purposes, the following will be sufficient.

Consider a tree is a collection of *nodes*, which are the labeled boxes in the figure, and *edges*, which are the line segments connecting nodes. A tree has the following special structure.

- The node at the top is called the *root*. Here, the root is labeled `html` and abstractly represents the entire HTML document.
- Regard each edge as always "pointing" from the node at its top end to the node at its bottom end. For any edge, the node at its top end is the *parent* and the node at the bottom end is a *child*. Like real families, a parent can be a child. For example, the node labeled `head` is the child of `html` and the parent of `meta`, `title`, and `style`.
- The *descendant* of a node  $x$  is any node  $y$  for which there is a path from  $x$  going down to  $y$ . For example, the node labeled `6x span` is a descendant of the node `body`. All nodes are descendants of the root.
- Any node with *no* descendants is a *leaf*.
- Any node that is neither a root nor a leaf is an *internal node*.
- There are no *cycles*. A cycle would be a loop. For instance, if you were to add an edge between the two lower rightmost nodes labeled, `strong` and `strong`, that would create a loop and the object would no longer be a tree.

For whatever reason, [computer scientists usually view trees upside down](https://www.quora.com/Why-are-trees-in-computer-science-generally-drawn-upside-down-from-how-trees-are-in-real-life) (<https://www.quora.com/Why-are-trees-in-computer-science-generally-drawn-upside-down-from-how-trees-are-in-real-life>), with the "root" at the top and the "leaves" at the bottom.

The BeautifulSoup package gives you a data structure for traversing this tree. For instance, consider an HTML file with the contents below shown both as code and pictorially.



```

In [1]: some_page = """
<html>
  <body>
    <p>First paragraph.</p>
    <p>Second paragraph, which links to the <a href="http://www.gatech.edu">Georgia Tech website</a>.</p>
    <p>Third paragraph.</p>
  </body>
</html>
"""
print(some_page)

<html>
  <body>
    <p>First paragraph.</p>
    <p>Second paragraph, which links to the <a href="http://www.gatech.edu">Georgia Tech website</a>.</p>
    <p>Third paragraph.</p>
  </body>
</html>

```

```
</a>.</p>
  <p>Third paragraph.</p>
</body>
</html>
```

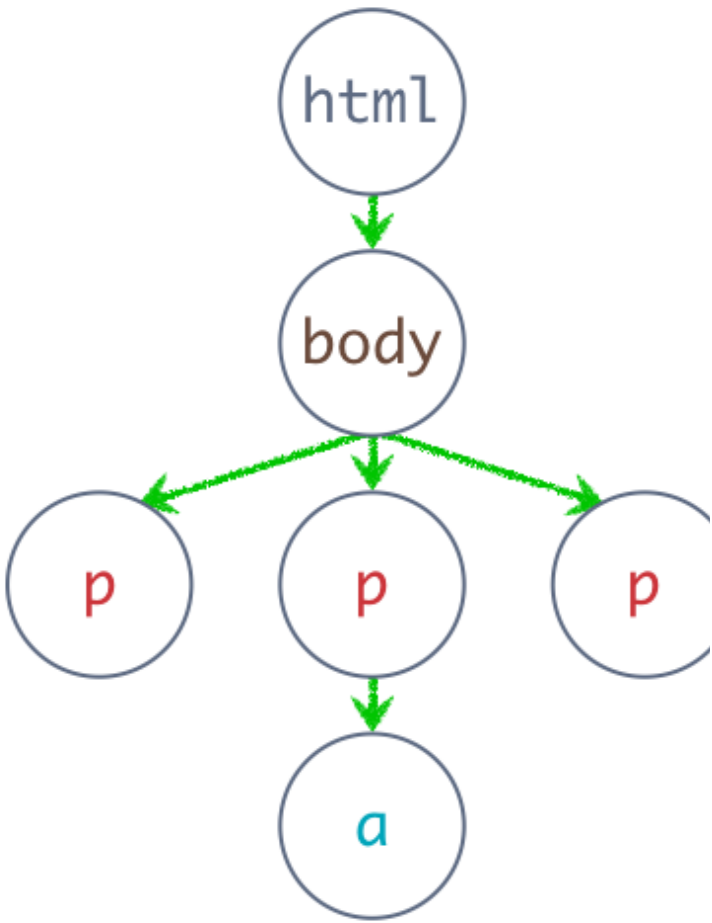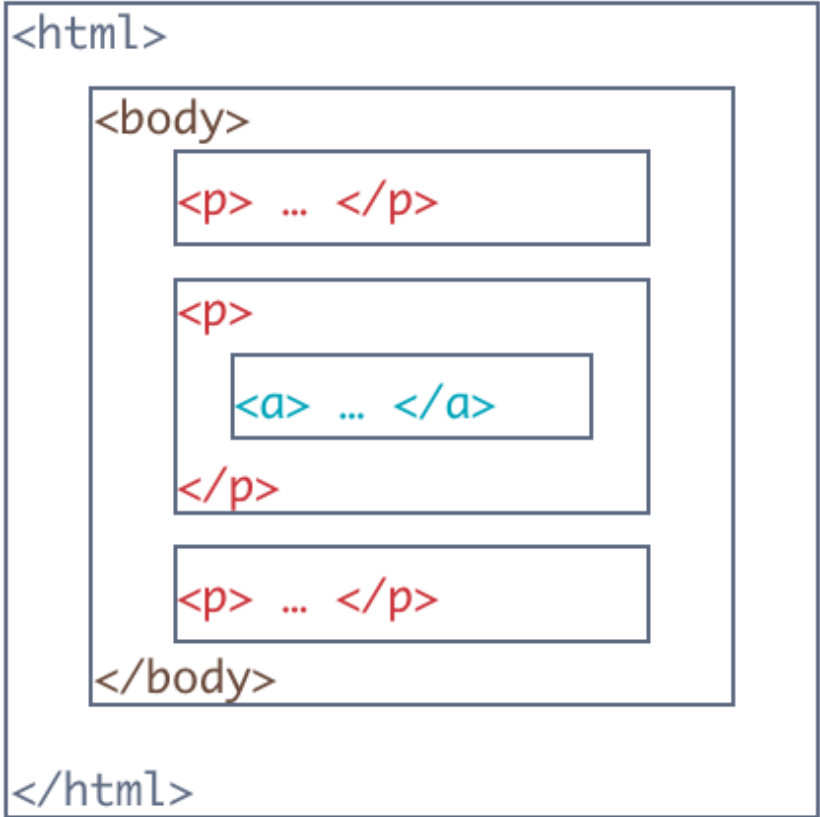

**Exercise 0.** Besides HTML files, what else have we seen in this class that could be represented by a tree? Briefly and roughly explain what and how.

Student's answer

Score: 0.0 / 0.0

**Answer.** One thing that has a natural tree representation is a Python program! For example, can you draw the following program as a tree?

```
import re

def scan_lines(text, pattern):
    matches = []
    for line in text.split('\n'):
        if re.search(pattern, text) is not None:
            matches.append(True)
        else:
            matches.append(False)
    return matches
```

## Using BeautifulSoup

Here is how you might use BeautifulSoup to inspect the structure of `some_page`.

Let's start by taking the contents of the page above (`some_page`) and asking BeautifulSoup to process it. Let's store the result in object `n`, `soup`, and then explore its contents:

```
In [2]: from bs4 import BeautifulSoup

soup = BeautifulSoup(some_page, "lxml")

print('1. soup ==', soup) # Print the HTML contents
print('\n2. soup.html ==', soup.html) # Root of the tree
print('\n3. soup.html.body ==', soup.html.body) # A child tag
print('\n4. soup.html.body.p ==', soup.html.body.p) # Another child tag
print('\n5. soup.html.body.contents ==', type(soup.html.body.contents), '::', soup.html.body.contents)

1. soup == <html>
<body>
<p>First paragraph.</p>
<p>Second paragraph, which links to the <a href="http://www.gatech.edu">Georgia Tech website
>.</p>
```

```
<p>Third paragraph.</p>
</body>
</html>
```

```
2. soup.html == <html>
<body>
<p>First paragraph.</p>
<p>Second paragraph, which links to the <a href="http://www.gatech.edu">Georgia Tech website</a>.</p>
<p>Third paragraph.</p>
</body>
</html>
```

```
3. soup.html.body == <body>
<p>First paragraph.</p>
<p>Second paragraph, which links to the <a href="http://www.gatech.edu">Georgia Tech website</a>.</p>
<p>Third paragraph.</p>
</body>
```

```
4. soup.html.body.p == <p>First paragraph.</p>
```

```
5. soup.html.body.contents == <class 'list'> :: ['\n', <p>First paragraph.</p>, '\n', <p>Second paragraph, which links to the <a href="http://www.gatech.edu">Georgia Tech website</a>.</p>, '\n', <p>Third paragraph.</p>, '\n']
```

Observe that the `.` notation allows us to reference HTML tags---that is, the stuff enclosed in angle brackets in the original HTML, e.g., `<html> ... </html>`, `<body> ... </body>`---as they are nested. But in the case of the `<body> ... </body>` tag, there are multiple subtags. Evidently, `soup.html.body.contents` contains these, as a list, which we know how to manipulate.

```
In [3]: # Enumerate all tags within the <body> ... </body> tag:
for i, elem in enumerate(soup.html.body.contents):
    print("{:4d}".format(i), type(elem), '\n\t==>', "'{}'".format(elem))

# Reference one of these, element 3:
elem3 = soup.html.body.contents[3]
print(elem3.contents)

[ 0] <class 'bs4.element.NavigableString'>
    ==> '
'
[ 1] <class 'bs4.element.Tag'>
    ==> '<p>First paragraph.</p>'
[ 2] <class 'bs4.element.NavigableString'>
    ==> '
'
[ 3] <class 'bs4.element.Tag'>
    ==> '<p>Second paragraph, which links to the <a href="http://www.gatech.edu">Georgia Tech website</a>.</p>'
[ 4] <class 'bs4.element.NavigableString'>
    ==> '
'
[ 5] <class 'bs4.element.Tag'>
    ==> '<p>Third paragraph.</p>'
[ 6] <class 'bs4.element.NavigableString'>
    ==> '
'
['Second paragraph, which links to the ', <a href="http://www.gatech.edu">Georgia Tech website</a>, '.']
```

**Exercise 1.** Write a statement that navigates to the tag representing the GT website link. Store this resulting tag object in a variable called `link`.

```
In [4]: Student's answer

link = soup.html.body.contents[3].contents[1]

print(link)

<a href="http://www.gatech.edu">Georgia Tech website</a>
```

```
In [5]: Grade cell: ex5_test Score: 0.0 / 0.0

# Checks your Link. Can you understand what it is doing?
import bs4
assert type(link) is bs4.element.Tag
assert link.name == 'a'
assert link['href'] == 'http://www.gatech.edu'
assert link.contents == ['Georgia Tech website']
```



## Other navigation tools

This lab includes a static copy of the Yelp! results for a search of "universities" in ATL. Let's start by downloading this file.

```
In [6]: # Run me: Code to download sample HTML file

import requests
import os
import hashlib

yelp_hm = 'yelp_atl_unies.html'
yelp_hm_checksum = 'a940e7cd0c8c408a5dd2098a87303afe'

if os.path.exists('.voc'):
    data_url = 'https://cse6040.gatech.edu/datasets/yelp-example-uni/{}'.format(yelp_hm)
else:
    data_url = 'https://github.com/cse6040/labs-fa17/raw/master/datasets/{}'.format(yelp_hm)

if not os.path.exists(yelp_hm):
    print("Downloading: {}".format(data_url))
    r = requests.get(data_url)
    with open(yelp_hm, 'w', encoding=r.encoding) as f:
        f.write(r.text)

with open(yelp_hm, 'r') as f:
    yelp_html = f.read().encode(encoding='utf-8')
    checksum = hashlib.md5(yelp_html).hexdigest()
    assert checksum == yelp_hm_checksum, "Downloaded file has incorrect checksum!"

print('{} is ready!'.format(yelp_hm))

'yelp_atl_unies.html' is ready!
```

Next, inspect and run this code, which prints the top (number one) result.

```
In [7]: uni_html_text = open(yelp_hm, 'r').read()
uni_soup = BeautifulSoup(uni_html_text, "lxml")

print("The number 1 ATL university according to Yelp!")

uni_1 = uni_soup.html.body \
    .contents[7] \
    .contents[9] \
    .contents[3] \
    .contents[1] \
    .contents[3] \
    .contents[1] \
    .contents[1] \
    .contents[7] \
    .contents[3] \
    .contents[5] \
    .contents[1] \
    .contents[1] \
    .contents[1] \
    .contents[1] \
    .contents[3] \
    .contents[1] \
    .contents[1] \
    .contents[1] \
    .contents[1] \
    .contents[0] \
    .contents[0]

print(uni_1)

The number 1 ATL university according to Yelp!:
Georgia Institute of Technology
```

We hope it is self-evident that the above method to navigate to a particular tag or element is not terribly productive or robust, particularly if there are small modifications to the HTML.

Here is an alternative. Inspect the raw HTML and observe that every non-ad search result appears in a tag of the form,

```
<span class="indexed-biz-name">1.      <a class="biz-name js-analytics-click" data-analytics-label="biz-
name" href="/biz/georgia-institute-of-technology-atlanta-2" data-hovercard-id="gBX8Uvh0wtdD5tGJeU-hxg" ><span>
an >Georgia Institute of Technology</span></a>
</span>
```

Beautiful Soup gives us a way to search for specific tags.

```
In [8]: indexed_unies = uni_soup.find_all(attrs={'class': 'indexed-biz-name'})
print("*** First 5 of {} results ***\n\n{}".format(len(indexed_unies), indexed_unies[:5]))

*** First 5 of 30 results ***
```

```
[<span class="indexed-biz-name">1.      <a class="biz-name js-analytics-click" data-analy
-label="biz-name" data-hovercard-id="gBX8Uvh0wtdD5tGJeU-hxg" href="/biz/georgia-institute-of
hnology-atlanta-2"><span>Georgia Institute of Technology</span></a>
</span>, <span class="indexed-biz-name">2.      <a class="biz-name js-analytics-click" da
nalytics-label="biz-name" data-hovercard-id="13oCD5wffSr2ypav9MpCsQ" href="/biz/emory-univer
-atlanta-2"><span>Emory <span class="highlighted">University</span></span></a>
</span>, <span class="indexed-biz-name">3.      <a class="biz-name js-analytics-click" da
nalytics-label="biz-name" data-hovercard-id="jAebE830x0lPCNsJoQII4A" href="/biz/spelman-coli
atlanta"><span>Spelman College</span></a>
</span>, <span class="indexed-biz-name">4.      <a class="biz-name js-analytics-click" da
nalytics-label="biz-name" data-hovercard-id="8YFAsc5dK1K6FYbn9sVQ7g" href="/biz/oglethorpe-u
rsity-atlanta"><span>Oglethorpe <span class="highlighted">University</span></span></a>
</span>, <span class="indexed-biz-name">5.      <a class="biz-name js-analytics-click" da
nalytics-label="biz-name" data-hovercard-id="o5tSSq2nJA-vseLTEDW9UA" href="/biz/georgia-stat
iversity-atlanta-3"><span>Georgia State <span class="highlighted">University</span></span></a>,
</span>]
```

**Exercise 2.** Based on the above, write a function that, given a Yelp! search results page such as uni\_soup above, returns the name of the number 1 indexed search result.

In [9]: Student's answer

```
def get_top_yelp_result(soup):
    """Given a Yelp! search result as a BeautifulSoup page,
    returns the name of the number 1 indexed result.
    """
    bizzes = soup.find_all (attrs={'class': 'indexed-biz-name'})
    top_biz = bizzes[0]
    rank = top_biz.contents[0].strip ()
    assert rank == '1.'
    return top_biz.contents[1].contents[0].contents[0]
```

In [10]: Grade cell: ex6\_testScore: 0.0 / 0.0

```
print(get_top_yelp_result(uni_soup))
assert get_top_yelp_result(uni_soup) == 'Georgia Institute of Technology'
```

Georgia Institute of Technology

This mini-tutorial only scratches the surface of what is possible with BeautifulSoup. As always, refer to the [package's documentation](https://www.crummy.com/software/BeautifulSoup/) (<https://www.crummy.com/software/BeautifulSoup/>) for all the awesome deets!

part2 (Score: 0.0 / 0.0)

- 1. Test cell (Score: 0.0 / 0.0)
- 2. Test cell (Score: 0.0 / 0.0)

**Important note!** Before you turn in this lab notebook, make sure everything runs as expected:

- First, **restart the kernel** -- in the menubar, select Kernel→Restart.
- Then **run all cells** -- in the menubar, select Cell→Run All.

Make sure you fill in any place that says YOUR CODE HERE or "YOUR ANSWER HERE."

Part 2: Mining the web: Web APIs

We hope the preceding exercise was painful: even with tools to process HTML, it is rough downloading raw HTML and trying to extract information from it!

Can you think of any other reasons why scraping websites for data in this way is not a good idea?

Luckily, many websites provide an application programming interface (API) for querying their data or otherwise accessing their services from your programs. For instance, Twitter provides a web API for gathering tweets, Flickr provides one for gathering image data, and Github fo

accessing information about repository histories.

These kinds of web APIs are much easier to use than, for instance, the preceding technique which scrapes raw web pages and then has parse the resulting HTML. Moreover, there are more scalable in the sense that the web servers can transmit structured data in a less verbose form than raw HTML.

As a starting example, here is some code to look at the activity on Github related to the public version of our course's materials.

```
In [1]: import requests

response = requests.get ('https://api.github.com/repos/cse6040/labs-fa17/events')

print ("==> .headers:", response.headers, "\n")

==> .headers: {'Server': 'GitHub.com', 'X-XSS-Protection': '1; mode=block', 'Access-Control-
se-Headers': 'ETag, Link, X-GitHub-OTP, X-RateLimit-Limit, X-RateLimit-Remaining, X-RateLim
set, X-OAuth-Scopes, X-Accepted-OAuth-Scopes, X-Poll-Interval', 'Transfer-Encoding': 'chunke
'Content-Encoding': 'gzip', 'Access-Control-Allow-Origin': '*', 'Strict-Transport-Security'
x-age=31536000; includeSubdomains; preload', 'X-GitHub-Media-Type': 'github.v3; format=json
-Runtime-rack': '0.028060', 'X-Content-Type-Options': 'nosniff', 'Status': '200 OK', 'X-Poll
erval': '60', 'Content-Security-Policy': "default-src 'none'", 'Content-Type': 'application,
n; charset=utf-8', 'Date': 'Wed, 20 Sep 2017 00:37:31 GMT', 'X-RateLimit-Limit': '60', 'X-G
-Request-Id': 'CDDA:3B92:5B2248B:C97424F:59C1B84B', 'Cache-Control': 'public, max-age=60, s
ge=60', 'Last-Modified': 'Tue, 19 Sep 2017 22:48:55 GMT', 'ETag': 'W/"911dffe660c66d48fac12
f5fd9b"', 'X-RateLimit-Remaining': '56', 'X-Frame-Options': 'deny', 'Vary': 'Accept', 'X-Rat
it-Reset': '1505871386'}
```

Note the Content-Type of the response:

```
In [2]: print (response.headers['Content-Type'])

application/json; charset=utf-8
```

The response is in JSON format, which is an open format for exchanging semi-structured data. (JSON stands for **Java**Script **Object** **Notat** JSON is designed to be human-readable and machine-readable, and maps especially well in Python to nested dictionaries. Let's take a look

See also [this tutorial \(http://www.w3schools.com/json/\)](http://www.w3schools.com/json/) for a JSON primer. JSON is among *the* universal formats for sharing data on the web; see, for instance, <https://www.sitepoint.com/10-example-json-files/> (<https://www.sitepoint.com/10-example-json-files/>).

```
In [3]: import json
print(type(response.json()))
print(json.dumps(response.json()[:3], sort_keys=True, indent=2))

<class 'list'>
[
  {
    "actor": {
      "avatar_url": "https://avatars.githubusercontent.com/u/5316640?",
      "display_login": "rvuduc",
      "gravatar_id": "",
      "id": 5316640,
      "login": "rvuduc",
      "url": "https://api.github.com/users/rvuduc"
    },
    "created_at": "2017-09-19T22:48:55Z",
    "id": "6611692513",
    "org": {
      "avatar_url": "https://avatars.githubusercontent.com/u/31073927?",
      "gravatar_id": "",
      "id": 31073927,
      "login": "cse6040",
      "url": "https://api.github.com/orgs/cse6040"
    },
    "payload": {
      "before": "572167f7d65edd7a7aa12a5dd17d703656678d14",
      "commits": [
        {
          "author": {
            "email": "richie@cc.gatech.edu",
            "name": "Richard (Rich) Vuduc"
          },
          "distinct": true,
          "message": "Added Yelp! ATL universities dataset",
          "sha": "fa1e95d4c350506b772e56bd41a01479ee3951f2",
          "url": "https://api.github.com/repos/cse6040/labs-fa17/commits/fa1e95d4c350506b772e56bd41a01479ee3951f2"
        },
        {
          "author": {
            "email": "richie@cc.gatech.edu",
            "name": "Richard (Rich) Vuduc"
          },
          "distinct": true,
          "message": "Added Yelp! ATL universities dataset",
          "sha": "fa1e95d4c350506b772e56bd41a01479ee3951f2",
          "url": "https://api.github.com/repos/cse6040/labs-fa17/commits/fa1e95d4c350506b772e56bd41a01479ee3951f2"
        }
      ]
    }
  }
]
```

```
      "name": "Richard (Rich) Vuduc",
    },
    "distinct": true,
    "message": "Merge branch 'master' of github.com:cse6040/labs-fa17",
    "sha": "c138fd4aa94c56debe3e640dfd4a1ba53afcdb88",
    "url": "https://api.github.com/repos/cse6040/labs-fa17/commits/c138fd4aa94c56debe:
dfd4a1ba53afcdb88"
  }
],
"distinct_size": 2,
"head": "c138fd4aa94c56debe3e640dfd4a1ba53afcdb88",
"push_id": 1996190687,
"ref": "refs/heads/master",
"size": 2
},
"public": true,
"repo": {
  "id": 100506580,
  "name": "cse6040/labs-fa17",
  "url": "https://api.github.com/repos/cse6040/labs-fa17"
},
"type": "PushEvent"
},
{
  "actor": {
    "avatar_url": "https://avatars.githubusercontent.com/u/5316640?",
    "display_login": "rvuduc",
    "gravatar_id": "",
    "id": 5316640,
    "login": "rvuduc",
    "url": "https://api.github.com/users/rvuduc"
  },
  "created_at": "2017-09-19T19:38:11Z",
  "id": "6610937299",
  "org": {
    "avatar_url": "https://avatars.githubusercontent.com/u/31073927?",
    "gravatar_id": "",
    "id": 31073927,
    "login": "cse6040",
    "url": "https://api.github.com/orgs/cse6040"
  },
  "payload": {
    "before": "917fffc44b55042095d5be7de61b65414bad76",
    "commits": [
      {
        "author": {
          "email": "richie@cc.gatech.edu",
          "name": "Richard (Rich) Vuduc"
        },
        "distinct": true,
        "message": "Added Yelp\\! ATL universities raw search results",
        "sha": "572167f7d65edd7a7aa12a5dd17d703656678d14",
        "url": "https://api.github.com/repos/cse6040/labs-fa17/commits/572167f7d65edd7a7a:
dd17d703656678d14"
      }
    ],
    "distinct_size": 1,
    "head": "572167f7d65edd7a7aa12a5dd17d703656678d14",
    "push_id": 1995800949,
    "ref": "refs/heads/master",
    "size": 1
  },
  "public": true,
  "repo": {
    "id": 100506580,
    "name": "cse6040/labs-fa17",
    "url": "https://api.github.com/repos/cse6040/labs-fa17"
  },
  "type": "PushEvent"
},
{
  "actor": {
    "avatar_url": "https://avatars.githubusercontent.com/u/5316640?",
    "display_login": "rvuduc",
    "gravatar_id": "",
    "id": 5316640,
    "login": "rvuduc",
    "url": "https://api.github.com/users/rvuduc"
  },
  "created_at": "2017-09-14T23:28:12Z",
  "id": "6593207015",
  "org": {
    "avatar_url": "https://avatars.githubusercontent.com/u/31073927?",
    "gravatar_id": "",
    "id": 31073927,
    "login": "cse6040",
    "url": "https://api.github.com/orgs/cse6040"
  },
  "payload": {
    "before": "4325c84d66605d105541c300c017077022"
```

```

"before": "43b5a884d16b895ad18e5141a280cc81/9/e/923",
"commits": [
  {
    "author": {
      "email": "richie@cc.gatech.edu",
      "name": "Richard (Rich) Vuduc"
    },
    "distinct": true,
    "message": "Added Lab 5 (regular expressions)",
    "sha": "917fffcca44b55042095d5be7de61b65414bad76",
    "url": "https://api.github.com/repos/cse6040/labs-fa17/commits/917fffcca44b55042095d5be7de61b65414bad76"
  }
],
"distinct_size": 1,
"head": "917fffcca44b55042095d5be7de61b65414bad76",
"push_id": 1986327053,
"ref": "refs/heads/master",
"size": 1
},
"public": true,
"repo": {
  "id": 100506580,
  "name": "cse6040/labs-fa17",
  "url": "https://api.github.com/repos/cse6040/labs-fa17"
},
"type": "PushEvent"
}
]

```

**Exercise 0.** It should be self-evident that the JSON response above consists of a sequence of records, which we will refer to as *events*. Each event is associated with an *actor*. Write some code to extract a dictionary of all actors, where the key is the actor's login and the value is the actor's URL.

In [4]: Student's answer

```

def extract_actors (json_github_events):
    """Given JSON records for events in a GitHub repo,
    returns a dictionary of the actors and their URLs.
    """
    urls = {}
    for event in json_github_events:
        actor = event['actor']['display_login']
        url = event['actor']['url']
        urls[actor] = url
    return urls

```

In [5]: Grade cell: extract\_actors\_test

Score: 0.0 / 0.0

```

actor_urls = extract_actors(response.json ())

for actor, url in actor_urls.items ():
    print ('{:} : {}'.format(actor, url))
    assert url == "https://api.github.com/users/{}".format(actor)

```

```

rvuduc: https://api.github.com/users/rvuduc
Augus-Kong: https://api.github.com/users/Augus-Kong

```

**Exercise 1.** Write some code that goes to each actor's URL and determines their name. If an actor URL is invalid, that actor should not appear in the output.

In [6]: Student's answer

```

def lookup_names (actor_urls):
    """Given a dictionary of (actor, url) pairs, Looks up the JSON at
    the URL and extracts the user's name (if any). Returns a new
    dictionary of (actor, name) pairs.
    """
    import re

    names = {}
    for actor, url in actor_urls.items ():
        response = requests.get (url)

        # Possible error conditions
        if response is None: continue
        if re.search ('application/json', response.headers['Content-Type']) is None: continue
        if 'name' not in response.json (): continue

        names[actor] = response.json ()['name']
    return names

```



return names

In [7]:

Grade cell: get\_names\_test

Score: 0.0 / 0.0

```
actor_names = lookup_names (actor_urls)

for actor, name in actor_names.items ():
    print ("{}: {}".format (actor, name))

assert actor_names['rvuduc'] == 'Rich Vuduc (personal account)'
```

```
rvuduc: Rich Vuduc (personal account)
Augus-Kong: XIANGYU KONG
```

That's the end of this notebook. Processing JSON is fairly straightforward, because it maps very naturally to nested dictionaries in Python might search the web for other sources of JSON data, including [this one \(https://www.yelp.com/dataset/challenge\)](https://www.yelp.com/dataset/challenge), and do your own processing!



## edX

- [About](#)
- [Affiliates](#)
- [edX for Business](#)
- [Open edX](#)
- [Careers](#)
- [News](#)

## Legal

- [Terms of Service & Honor Code](#)
- [Privacy Policy](#)
- [Accessibility Policy](#)
- [Trademark Policy](#)
- [Sitemap](#)

## Connect

- [Blog](#)
- [Contact Us](#)
- [Help Center](#)
- [Media Kit](#)
- [Donate](#)





© 2020 edX Inc. All rights reserved.  
深圳市恒宇博科技有限公司 [粤ICP备17044299号-2](#)