 Marwadi University Marwadi Chandarana Group	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn
Experiment No: 27	Date: Enrollment No: 92400133131

Aim: Practical based on Data Visualization with Seaborn

IDE:

Installation

pip install seaborn

Histplot: Seaborn Histplot is used to visualize the univariate set of distributions(single variable). It plots a histogram, with some other variations like kdeplot and rugplot.

```
import numpy as np
```

```
import seaborn as sns
```

```
sns.set(style="white")
```

```
# Generate a random univariate dataset
```


```
rs = np.random.RandomState(10)
```



```
d = rs.normal(size=100)
```

```
# Plot a simple histogram and kde
```


```
sns.histplot(d, kde=True, color="m")
```

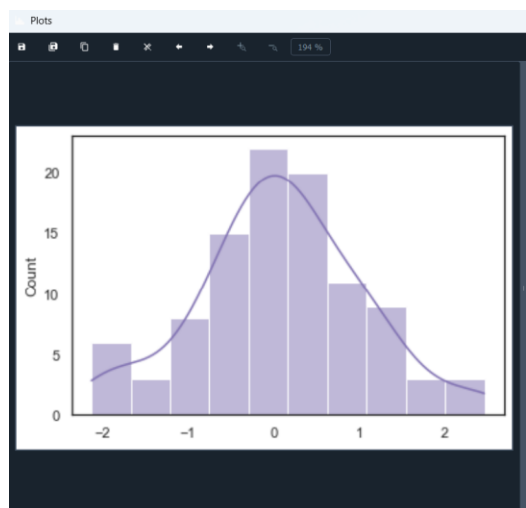Output



 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133131

Distplot: Seaborn distplot is used to visualize the univariate set of distributions(Single features) and plot the histogram with some other variations like kdeplot and rugplot.

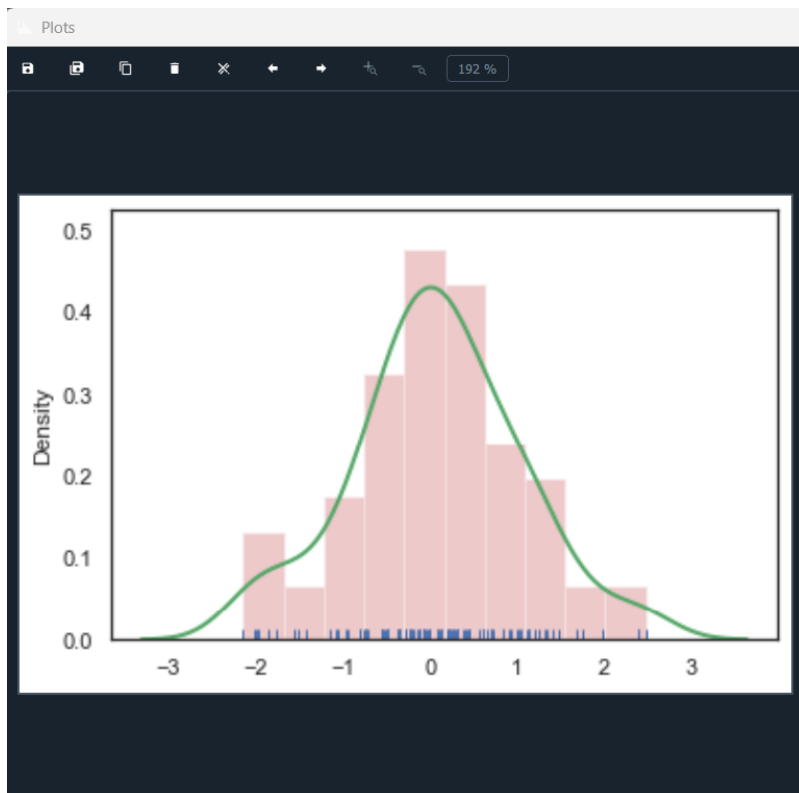

Lineplot: The line plot is one of the most basic plots in the seaborn library. This plot is mainly used to visualize the data in the form of some time series, i.e. in a continuous manner.


```
import seaborn as sns

sns.set(style="dark")

fmri = sns.load_dataset("fmri")


# Plot the responses for different\
# events and regions

sns.lineplot(x="timepoint",
             y="signal",
```

 Marwadi University Marwadi Chandarana Group	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133131

```
hue="region",
style="event",
data=fmri)
```

output

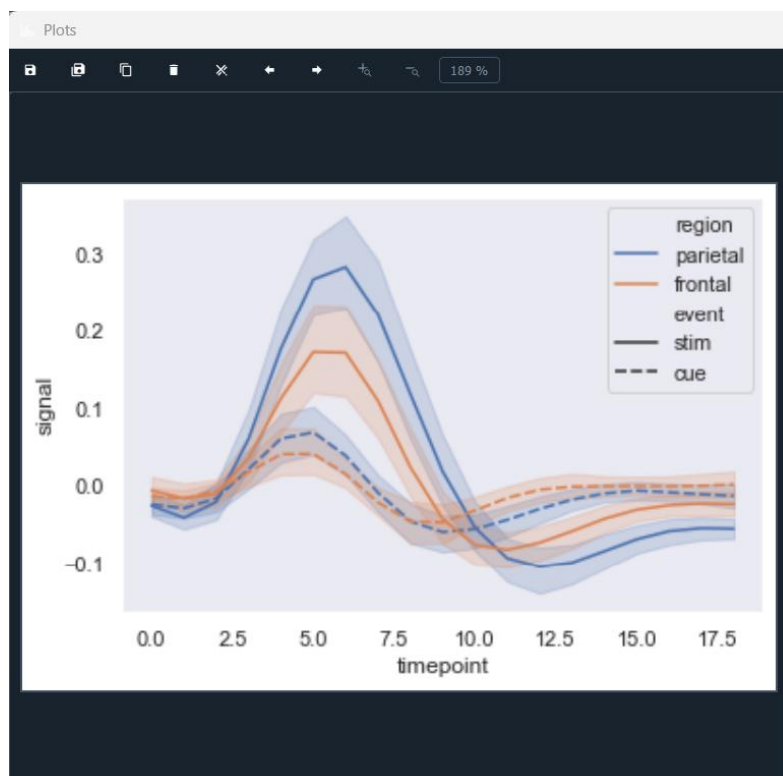

Implot: The Implot is another most basic plot. It shows a line representing a linear regression model along with data points on the 2D space and x and y can be set as the horizontal and vertical labels respectively.



```
import seaborn as sns

sns.set(style="ticks")

# Loading the dataset


df = sns.load_dataset("anscombe")



# Show the results of a linear regression
```

 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133131

```
sns.lmplot(x="x", y="y", data=df)
```

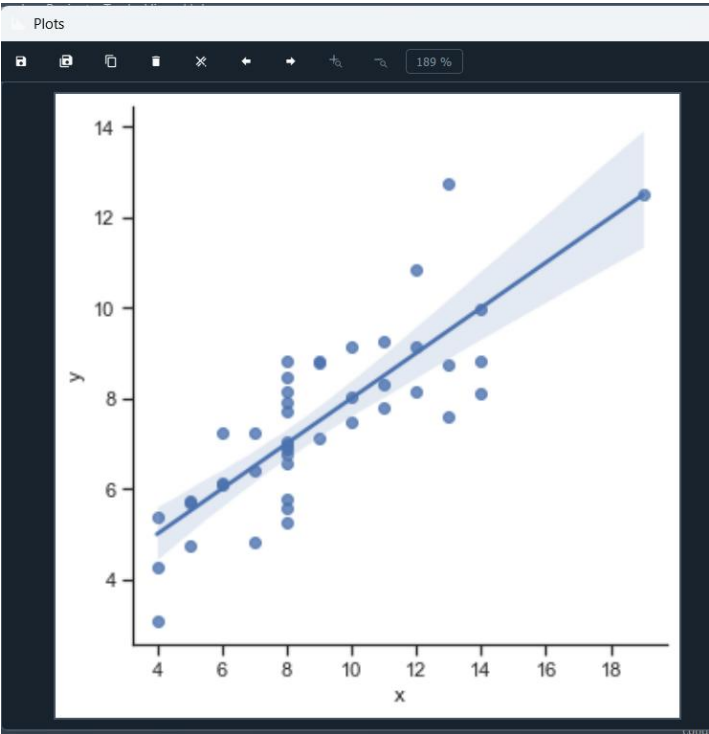Output



 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133131

Post Lab

Visualize the data with a box plot and pandas:

```
import pandas as pd
```

```
import seaborn as sns
```


```
# initialise data of lists
```


```
data = {'Name': [ 'Mohe' , 'Karnal' , 'Yrik' , 'jack' ],
```

```
        'Age': [ 30 , 21 , 29 , 28 ]}
```

```
df = pd.DataFrame( data )
```

```
sns.boxplot( data['Age'] )
```

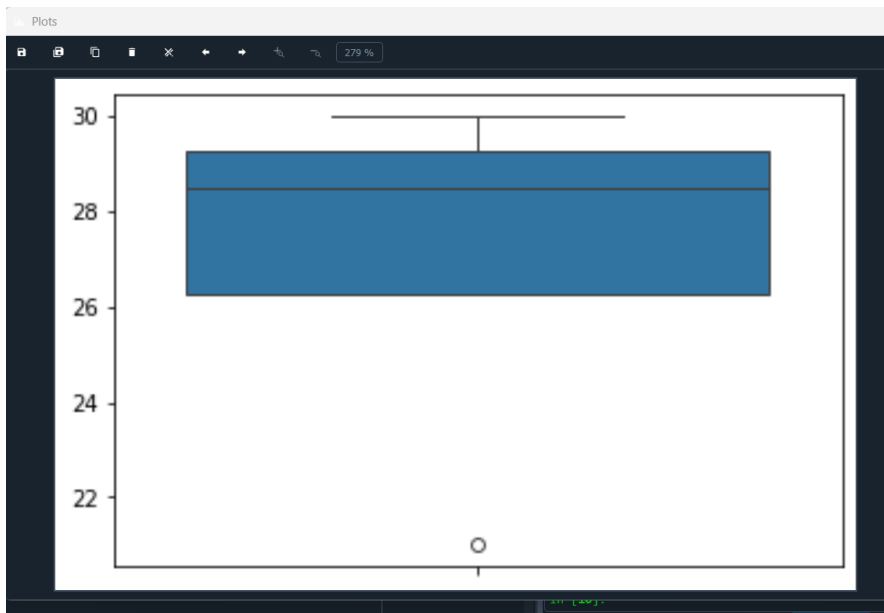

 Marwadi University Marwadi Chandarana Group	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn
Experiment No: 27	Date: Enrollment No: 92400133131

Draw the violin plot with Pandas

```
import pandas as pd


import seaborn as sns



# initialise data of lists

data = {'Name': [ 'Mohe' , 'Karnal' , 'Yrik' , 'jack' ],
        'Age': [ 30 , 21 , 29 , 28 ]}

df = pd.DataFrame( data )

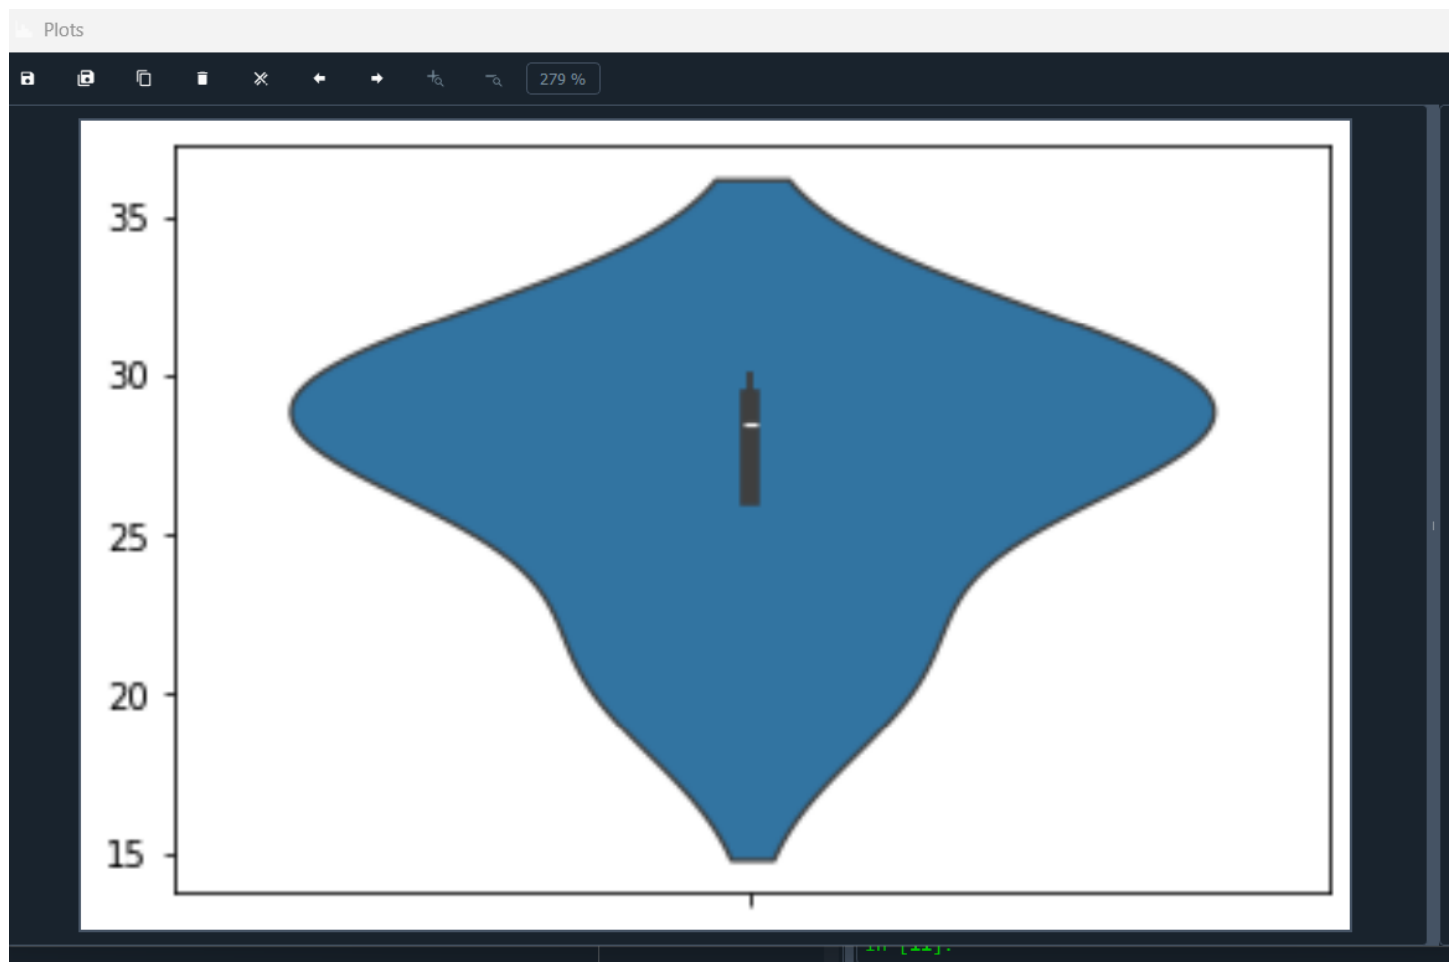sns.violinplot(data['Age'])
```



 Marwadi University <small>Marwadi Chandarana Group</small> 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133131

Github link :- <https://github.com/farhan-web404/farhankaladiya.git>