

Day 21 – Configure API Permissions in Microsoft Entra ID

Objective

Learn how to grant Microsoft Graph API permissions to an application and understand the difference between delegated permissions and application permissions.

Step 1 – Open App Registration

Go to:

Microsoft Entra Admin Center

→ Identity

→ Applications

→ App registrations

→ IAM-Lab-App

Step 2 – Open API Permissions

Click:

Manage

→ API permissions

Step 3 – Review Existing Permissions

Take a screenshot of:

- Configured permissions
- Microsoft Graph
- Permission type

Screenshot 1

Home > App registrations > IAM-Lab-App | Authentication (Preview) > App registrations > IAM-Lab-App

IAM-Lab-App | API permissions

Search « Refresh Got feedback?

Overview

Quickstart

Integration assistant

Diagnose and solve problems

Manage

Branding & properties

Authentication (Preview)

Certificates & secrets

Token configuration

API permissions

Expose an API

App roles

Owners

Roles and administrators

Manifest

Support + Troubleshooting

New support request

Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that application. Permissions that users have already granted on their own behalf aren't affected. [Learn more](#)

The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column may not reflect the value in your organization, or in organizations where this app will be used. [Learn more](#)

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Default Directory

API / Permissions name	Type	Description	Admin consent requ...	Status
Microsoft Graph (2)				...
User.Read	Delegated	Sign in and read user profile	No	...
User.ReadBasic.All	Delegated	Read all users' basic profiles	No	...

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).

Step 4 – Add a Permission

Click:

Add a permission

Choose:

Microsoft Graph

Step 5 – Select Delegated Permissions

Choose:

Delegated permissions

Search for:

User.Read


Select:

User.Read

Click:

Add permissions

Screenshot 2

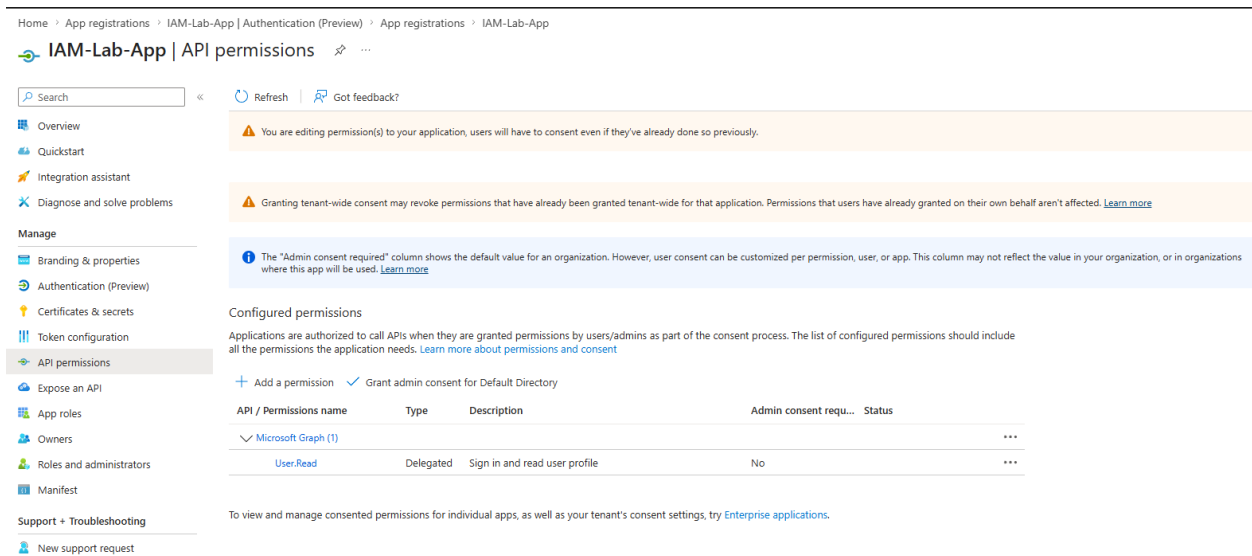

Home > App registrations > IAM-Lab-App | Authentication (Preview) > App registrations > IAM-Lab-App

IAM-Lab-App | API permissions

Search Refresh Got feedback?

Overview

Quickstart

Integration assistant

Diagnose and solve problems

Manage

Branding & properties

Authentication (Preview)

Certificates & secrets

Token configuration

API permissions

Expose an API

App roles

Owners

Roles and administrators

Manifest

Support + Troubleshooting

New support request

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Default Directory

API / Permissions name	Type	Description	Admin consent requ...	Status
Microsoft Graph (1)				...
User.Read	Delegated	Sign in and read user profile	No	...

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).

Step 6 – Review the Permission

Verify that **User.Read** appears under Microsoft Graph.

You should see:

- Microsoft Graph
- Delegated
- User.Read

Screenshot 3

 IAM-Lab-App | API permissions ...

<  Refresh |  Got feedback?

-  Overview
-  Quickstart
-  Integration assistant
-  Diagnose and solve problems

Manage

-  Branding & properties
-  Authentication (Preview)
-  Certificates & secrets
-  Token configuration
-  API permissions

-  Expose an API
-  App roles
-  Owners
-  Roles and administrators
-  Manifest

Support + Troubleshooting

-  New support request

 You are editing permission(s) to your application, users will have to consent even if they've already done so previously.

 Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that application. Permissions that users have already granted on their own behalf aren't affected. [Learn more](#)

 The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column may not reflect the value in your organization, or in organizations where this app will be used. [Learn more](#)

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

 Add a permission  Grant admin consent for Default Directory

API / Permissions name	Type	Description	Admin consent requ...	Status
 Microsoft Graph (1)				
User.Read	Delegated	Sign in and read user profile	No	...

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).