

BOSONIC CODES FOR PEDESTRIANS

FARIS SBAHI

Quantum error correction is necessary to achieve fault tolerant quantum communication. In other words, one must implement a scheme to encode information redundantly into physical degrees of freedom so that information can be preserved in the presence of noise. One such scheme is continuous variable quantum information processing using bosonic modes[5, 6, 21, 3, 15, 12]. In this case, one encodes information in the space corresponding to the occupation number of a harmonic oscillator. Hence, one can express the code subspace in terms of number states $\{|n\rangle\}_{n=0}^{\infty}$ [17], position and momentum eigenstates $\{|x\rangle\}_{x \in \mathbb{R}}$ and $\{|p\rangle\}_{p \in \mathbb{R}}$ [11], or a few coherent states $\{|\alpha\rangle\}_{\alpha \in S}$ (for some finite set S) [9].

The first studied continuous variable scheme utilizing bosonic modes is known as the two-mode dual-rail encoding published in 1995 [8]. Nowadays, there are several bosonic codes being evaluated in the fault tolerant quantum computation race. In this review, we'll consider a few of the most popular contenders: first, we'll develop a practical bosonic error model. Next, we'll study three popular single mode codes with impressive protection capabilities with respect to this model. Then, we'll consider the work of [2] to evaluate the performance of these codes. Finally, we'll consider hardware-efficient multi-mode extensions which are notable for their progress toward physical realizability.

1. INTRODUCTION

1.1. Definitions. The generic task of quantum error correction is to find two logical code words—a qubit—embedded in a large Hilbert space. The code words are required to be robust such that if any one of the single, independent errors $E_{l,k} \in \mathcal{E}$ occurs, no quantum information is lost and any quantum superposition of the logical code words can be faithfully recovered. This is equivalent to finding two logical code words $|W_{\sigma}\rangle$, where $\sigma = \uparrow, \downarrow$, that satisfy the quantum error correction criteria, known also as the Knill-Laflamme conditions[20].

$$(1) \quad \langle W_{\sigma} | E_l^{\dagger} E_k | W_{\sigma} \rangle = \alpha_{l,k} \delta_{\sigma,\sigma'}$$

for all $E_{l,k} \in \mathcal{E}$ such that $\alpha_{l,k}$ are entries of a Hermitian matrix and independent of the logical words. The independence of entries $\alpha_{l,k}$ from the logical code words and the structure of the non-diagonal entries guarantee that the different errors are distinguishable and correctable.

Notationally, we'll refer to a harmonic oscillator's non-Hermitian creation and annihilation operators as a^{\dagger} and a , respectively. Furthermore, we define $\hat{n} := \hat{a}^{\dagger} \hat{a}$. Recall the relations, with respect to Fock states $|n\rangle$,

$$\begin{aligned} \hat{a}^{\dagger} |n\rangle &= \sqrt{n+1} |n+1\rangle, & \hat{a} |n\rangle &= \sqrt{n} |n-1\rangle \\ \hat{n} |n\rangle &= n |n\rangle \\ [\hat{a}, \hat{a}^{\dagger}] &= 1, & [\hat{n}, \hat{a}^{\dagger}] &= \hat{a}^{\dagger}, & [\hat{n}, \hat{a}] &= -\hat{a}, \end{aligned}$$

Also, recall the definition of coherent states $|\alpha\rangle$ which refer to eigenstates of the annihilation operator,

$$|\alpha\rangle = e^{-\frac{|\alpha|^2}{2}} \sum_{n=0}^{\infty} \frac{\alpha^n}{\sqrt{n!}} |n\rangle = e^{-\frac{|\alpha|^2}{2}} e^{\alpha \hat{a}^{\dagger}} |0\rangle,$$

We will call errors generated by action of \hat{a} "loss" errors, by \hat{a}^{\dagger} "gain" errors, and by \hat{n} "dephasing" errors.

2. BOSONIC ERROR MODELS

It's especially important to consider a practical bosonic error model before designing a bosonic code because of the unique nature of photon errors. In particular, photons are prone to loss, and photon-photon interactions are extremely weak. Hence, bosonic QEC codes focus on correcting photon-loss errors using very limited forms of photon-photon interactions while striving to be hardware efficient[22].

We can describe this using the pure-loss channel, which is a model for broadband-line and free-space communication and it is the most common incoherent error process in optical and microwave cavities[2]. The second most common error is cavity dephasing, which is caused by fluctuations in the cavity frequency. Optical cavities have to be actively stabilized to fix the frequency, but the effects of such fluctuations are small relative to effects of energy loss, particularly in microwave cavities.

The bosonic pure-loss channel is given by $N_\gamma = \exp(\kappa t D)$ (γ defined below) with superoperator $D(\cdot) = \hat{a}\hat{a}^\dagger - 1/2\{\hat{n}, \cdot\}$, excitation loss rate κ , and time interval t [2]. Another way to represent this is in the Kraus representation with Kraus operators

$$(2) \quad E_l = \left(\frac{\gamma}{1-\gamma}\right)^{l/2} \frac{a^l}{\sqrt{l!}} (1-\gamma)^{n/2}$$

where

$$\gamma = 1 - \exp(-\kappa t)$$

This is derived by integrating over all the possible photon loss "jump" times of exactly l photon jumps during a small finite time interval δt [7], similar in spirit to the Feynmann path integral. Therefore, the channel can be described as

$$N_\gamma = \sum_l^\infty E_l \rho E_l^\dagger$$

for density operator ρ .

Observe that this channel does not contain the identity as a Kraus operator when $\gamma \neq 0$ due to the "damping" ("back-action") term $(1-\gamma)^{n/2}$ which results from the non-triviality of observing no photon jump. So, even if there is no loss, there is still redistribution of the probabilities of being in Fock states. Furthermore, both this redistribution and photon loss take place over continuous time and so continuous time evolutions results in an infinite set of possible errors. Therefore, the error correction criteria (1) can't be utilized directly.

Instead, one can expand each error operator in powers of $\kappa \delta t$ and choose to correct up to a given highest order. This is termed "approximate quantum error correction"[16]. It is then enough to satisfy the quantum error correction criteria (1) only approximately such that the original state can be recovered with an accuracy given by the same highest order in $\kappa \delta t$ [17].

So, if we perform a Taylor series expansion of each of the Kraus operators E_l above and consider correcting both the photon loss and back-action contributions up to order $O[(\kappa \delta t)^L]$, then we can derive a new set of approximate error correction conditions. The full derivation is contained in [17] but we summarize the results below which we'll utilize in our analysis in the next sections.

First, observe that Kraus operators $E_{l>L}$ can be ignored since they have the effect of order at least $L+1$. So, denote $E_{\mu,l}$ as the μ th entry of the expansion of (2) in powers of $(\kappa \delta t)^{1/2}$. Now, for convenience sake, expand each Kraus operator $E_{l \leq L}$ into two contributions

$$E_l = B_l + C_l + O[(\kappa \delta t)^{L+1/2}]$$

where

$$B_l = \sum_{\mu=l}^L E_{\mu,l} (\kappa \delta t)^{\mu/2}$$

$$C_l = \sum_{\mu=L+1}^{2L-1} E_{\mu,l} (\kappa \delta t)^{\mu/2}$$

Then, we can rewrite our channel as

$$\begin{aligned} N_\gamma &= \sum_{l=0}^{\infty} E_l \rho E_l^\dagger \\ &= \sum_{l=0}^L E_l \rho E_l^\dagger + O[(\kappa \delta t)^{L+1}] \\ &= \sum_{l=0}^L (B_l \rho B_l^\dagger + B_l \rho C_l^\dagger + C_l \rho B_l^\dagger) + O[(\kappa \delta t)^{L+1}] \end{aligned}$$

Hence, one can ignore the negligible $O[(\kappa \delta t)^{L+1}]$ part of the interference terms and verify only that the effect of the remaining important part is independent of the logical code words. Together, if the error operators B_l and C_l for all $0 \leq l \leq L$ satisfy the two following conditions,

$$(3) \quad \begin{aligned} \langle W_\sigma | B_l^\dagger B_l | W'_\sigma \rangle &= \beta_l \delta_{\sigma\sigma'} \\ \langle W_\sigma | B_l^\dagger C_l | W'_\sigma \rangle &= \nu_l \delta_{\sigma\sigma'} + O[(\kappa \delta t)^{L+1}] \end{aligned}$$

then the original state can be corrected up to order $O[(\kappa \delta t)^L]$.

These equations have the interpretation of allowing us to determine to what order a code corrects both loss errors and back-action errors. In this case of binomial codes, we'll see that we can correct back-action to the same order as photon loss. Other codes have addressed the back-action contribution by constructing multimode codes[7]. These codes avoid no-jump evolution by combining two or more physical elements with identical decay rates and constructing the logical code words such that they are superpositions of states with the same combined total excitation number.

3. SINGLE MODE CODES

First, we emphasize why we must establish new codes for bosonic systems in the first place. What if we used a simple encoding of M qubits: 2^M Fock states cover photon numbers $0, 1, \dots, (2^M - 1)$. Use binary representation: $|n\rangle = |b_{M-1} b_{M-2} \dots b_0\rangle$. The j th binary digit represents the eigenvalue $(1 + Z_j)/2$ for the corresponding physical qubit. E.g., $n = 8$: $|1000\rangle$. Photon loss occurs, $a : |1000\rangle \mapsto |0111\rangle$. Hence, as the authors of [17] note, QEC schemes based on models of independent single qubit errors cannot be easily transferred to this problem. Luckily, the stabilizer formalism provides useful intuition for codes we'll discuss

3.1. A Simple Example. So, consider a simple bosonic code to protect against $\mathcal{E} = \{I, \hat{a}\}$. Define $|W_\uparrow\rangle = \frac{|0\rangle + |4\rangle}{2}$, $|W_\downarrow\rangle = |2\rangle$. Hence, $|E_1\rangle = |3\rangle$ and $|E_2\rangle = |1\rangle$. We can distinguish states by measuring number and checking mod 4. Observe that both logical states have the same mean photon number i.e. $\langle W_\sigma | \hat{n} | W_\sigma \rangle = 2, \forall \sigma$. Therefore, $\hat{a} : \alpha |W_\uparrow\rangle + \beta |W_\downarrow\rangle \mapsto \alpha |E_1\rangle + \beta |E_2\rangle$. We say that this condition implies that there is no "deformation".

How can we generalize from here? Well, we can add greater spacing between states so that we can detect higher order loss errors or alternatively gain errors. Furthermore, observe that action by n "dephases" in the sense that, after transformation, the relative phases of the Fock states are transformed. This action leads to a superposition of codewords and error words. Project onto word basis to recover (efficient).

3.2. Cat Codes. Cat codes were first discovered in [9] in the case of a single mode. Several papers have extended these codes to the multi-mode case in order to correct more errors or offer a hardware-efficient implementation[1, 13, 18] and we will summarize these results in Section 4.2.1.

Now, consider using a superposition of "well-separated" coherent states as the logical state encoding. For example, consider a simple case

$$\begin{aligned} |C_{\uparrow/\downarrow}^\alpha\rangle &= N_{\uparrow/\downarrow}(|\alpha\rangle \pm |i\alpha\rangle + |-\alpha\rangle \pm |-i\alpha\rangle) \\ &= N_{\uparrow/\downarrow} \sum_{p \text{ even/odd}}^{[0,\infty)} \sqrt{\exp(-|\alpha|^2) \frac{\alpha^{4p}}{2p!}} |2p\rangle \end{aligned}$$

where $N_{\uparrow/\downarrow}$ are the normalization factors which evidently become equal as $\alpha \rightarrow \infty$. Similarly, as $\alpha \rightarrow \infty$, $\langle C_{\uparrow}^\alpha | n^p | C_{\uparrow}^\alpha \rangle = \langle C_{\downarrow}^\alpha | n^p | C_{\downarrow}^\alpha \rangle$. Hence, according to (1), cat states are potentially immune from any order of dephasing.

- explain why normalization factors approximate error correction unmet

Remember: distributed as Poisson and for large N , Binomial and Poisson approach normal distribution

Now, two different coherent states are not orthogonal,

$$\langle \beta | \alpha \rangle = e^{-\frac{1}{2}(|\beta|^2 + |\alpha|^2 - 2\beta^* \alpha)} \neq \delta(\alpha - \beta) \quad \langle \beta | \alpha \rangle = e^{-\frac{1}{2}(|\beta|^2 + |\alpha|^2 - 2\beta^* \alpha)} \neq \delta(\alpha - \beta)$$

(linked to the fact that they are eigenvectors of the non-self-adjoint annihilation operator a).

$$|\alpha\rangle = e^{-\frac{|\alpha|^2}{2}} \sum_{n=0}^{\infty} \frac{\alpha^n}{\sqrt{n!}} |n\rangle = e^{-\frac{|\alpha|^2}{2}} e^{\alpha \hat{a}^\dagger} |0\rangle,$$

Loss takes coherent states to coherent states! Can measure mod $S + 1$ again to determine whether jump occurred. Do we do anything, if not

The notation $|\alpha\rangle$ does not refer to a Fock state. For example, when $\alpha = 1$, one should not mistake $|1\rangle$ for the single-photon Fock state, which is also denoted $|1\rangle$ in its own notation.

The expression $|\alpha\rangle$ with $\alpha = 1$ represents a Poisson distribution of number states $|n\rangle$ with a mean photon number of unity.

3.3. Binomial Codes.

- Protect against $\mathcal{E} = \{I, a, a^2, \dots, a^L, a^\dagger, \dots, (a^\dagger)^G, N, \dots, N^D\}$
- Consider

$$|W_{\uparrow/\downarrow}\rangle = \frac{1}{\sqrt{2^N}} \sum_{p \text{ even/odd}}^{[0, N+1]} \sqrt{\binom{N+1}{p}} |p(S+1)\rangle$$

with $S = L + G$, $N = \max\{L, G, 2D\}$.

- Now, trust me that it works similarly to before!
- Mean photon numbers equal (no deformation) and QEC condition holds
- Can be shown by writing difference in l th moment of photon number of codewords as l th derivative of $(1+x)^{N+1}|_{x=-1}$ with $l \leq \max\{L, G\}$ up to a factor
- Measure photon number mod $S + 1$

The Fock state distributions of the binomial and cat codes are binomial and Poissonian, respectively. As the average number of photons is increased (larger N), both of these distributions approach a normal distribution, and so the binomial and cat codes asymptotically approach each other.

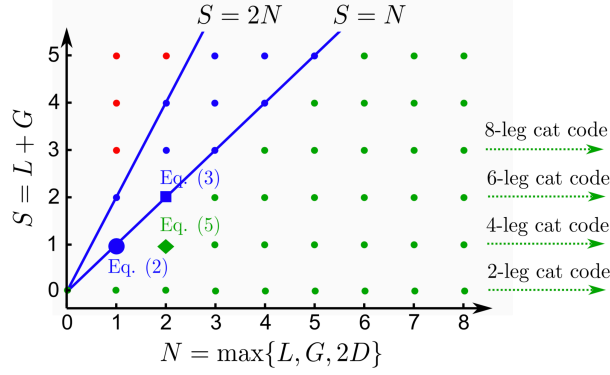


FIGURE 1. Figure borrowed from [17] comparing binomial codes to cat codes. Observe that, in principle, unlimited dephasing errors can be tolerated by cat codes.


3.4. GKP Codes.

- Use the continuous basis of non-normalizable eigenstates of the position operator x
- Not enough time!
- Quantum analogue of frequency combs
- Key: protect against displacement errors $D_\alpha = \exp\{\alpha a^\dagger - \alpha^* a\}$, not loss errors explicitly

4. DISCUSSION

4.1. Performance Comparisons. VV Albert considers "channel fidelity", $F_{\mathcal{E}}$, which is the overlap between the initial state and the final state when considering an initial Bell state such that only the first qubit is acted on by the channel

Optimal recovery for each code is computable via a semi-definite program

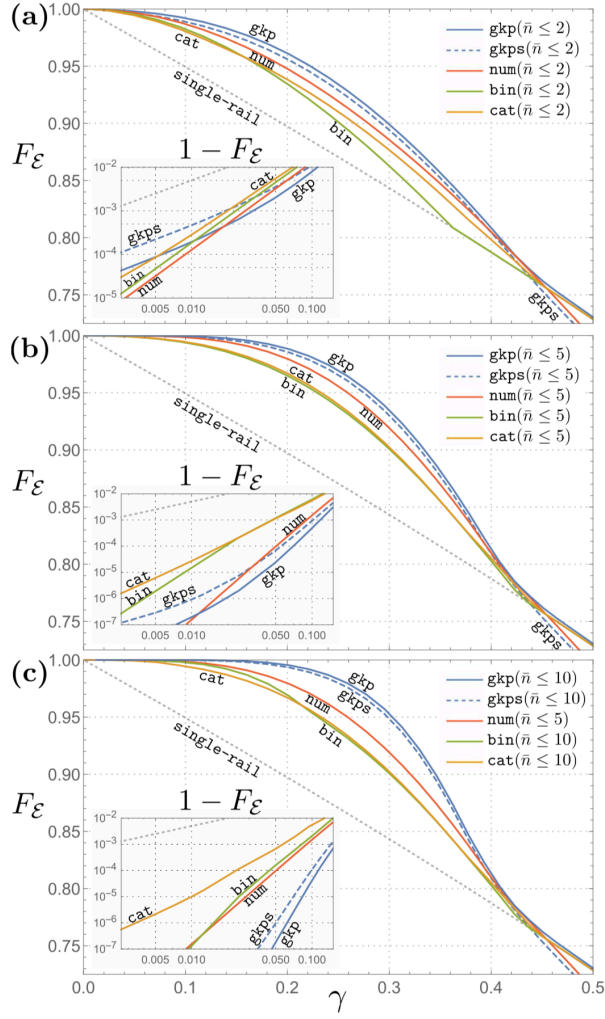

4.2. Multi-Mode Extensions.

4.2.1. Cat Codes.

- Pair-cat codes (VV Albert)
- Reduction in order of nonlinearity required for physical realization (as with $\chi(2)$)
- With ordinary cat codes and current technology, the number parity syndrome makes it difficult to realize simultaneous discrete (usually for loss) and continuous error correction (usually for dephasing)

4.2.2. Binomial Codes. Hardware Efficient Constructions

Noon codes

- To create more useful quantum superpositions of Fock states which can store quantum information, it is necessary to couple the bosonic mode to a non-linear element, e.g., a superconducting qubit, a trapped ion, or a Rydberg atom
- $\chi(2)$ code uses $O(n)$ instead of $O(n^2)$ qubits that previous two mode codes had used to correct m loss/gain/dephasing errors (Niu)
- Inspired by cat code, but uses lower order non-linearity

4.3. Broader Context.

4.3.1. Continuous Variable Systems.

4.3.2. Future Developments.

REFERENCES

- [1] Victor V Albert, Shantanu O Mundhada, Alexander Grimm, Steven Touzard, Michel H Devoret, and Liang Jiang, *Multi-mode cat codes*, arXiv preprint arXiv:1801.05897 (2018).
- [2] Victor V Albert, Kyungjoo Noh, Kasper Duivenvoorden, Dylan J Young, RT Brierley, Philip Reinhold, Christophe Vuillot, Linshu Li, Chao Shen, SM Girvin, et al., *Performance and structure of single-mode bosonic codes*, arXiv preprint arXiv:1708.05010 (2017).
- [3] Takao Aoki, Go Takahashi, Tadashi Kajiya, Jun-ichi Yoshikawa, Samuel L Braunstein, Peter Van Loock, and Akira Furusawa, *Quantum error correction beyond qubits*, Nature Physics **5** (2009), no. 8, 541.
- [4] Marcel Bergmann and Peter van Loock, *Quantum error correction against photon loss using noon states*, Physical Review A **94** (2016), no. 1, 012311.
- [5] Samuel L Braunstein, *Error correction for continuous quantum variables*, Quantum Information with Continuous Variables, Springer, 1998, pp. 19–29.
- [6] Samuel L Braunstein and Peter Van Loock, *Quantum information with continuous variables*, Reviews of Modern Physics **77** (2005), no. 2, 513.
- [7] Isaac L Chuang, Debbie W Leung, and Yoshihisa Yamamoto, *Bosonic quantum codes for amplitude damping*, Physical Review A **56** (1997), no. 2, 1114.
- [8] Isaac L Chuang and Yoshihisa Yamamoto, *Simple quantum computer*, Physical Review A **52** (1995), no. 5, 3489.
- [9] Paul T Cochrane, Gerard J Milburn, and William J Munro, *Macroscopically distinct quantum-superposition states as a bosonic code for amplitude damping*, Physical Review A **59** (1999), no. 4, 2631.
- [10] S Glancy, HM Vasconcelos, and TC Ralph, *Transmission of optical coherent-state qubits*, Physical Review A **70** (2004), no. 2, 022317.
- [11] Daniel Gottesman, Alexei Kitaev, and John Preskill, *Encoding a qubit in an oscillator*, Physical Review A **64** (2001), no. 1, 012310.
- [12] Mikael Lassen, Metin Sabuncu, Alexander Huck, Julien Niset, Gerd Leuchs, Nicolas J Cerf, and Ulrik L Andersen, *Quantum optical coherence can survive photon losses using a continuous-variable quantum erasure-correcting code*, Nature Photonics **4** (2010), no. 10, 700.
- [13] Zaki Leghtas, Gerhard Kirchmair, Brian Vlastakis, Robert J Schoelkopf, Michel H Devoret, and Mazhar Mirrahimi, *Hardware-efficient autonomous quantum memory protection*, Physical Review Letters **111** (2013), no. 12, 120501.
- [14] Linshu Li, Chang-Ling Zou, Victor V Albert, Sreraman Muralidharan, SM Girvin, and Liang Jiang, *Cat codes with optimal decoherence suppression for a lossy bosonic channel*, Physical review letters **119** (2017), no. 3, 030502.
- [15] Seth Lloyd and Jean-Jacques E Slotine, *Analog quantum error correction*, Physical Review Letters **80** (1998), no. 18, 4088.
- [16] Prabha Mandayam and Hui Khoo Ng, *Towards a unified framework for approximate quantum error correction*, Physical Review A **86** (2012), no. 1, 012335.
- [17] Marios H Michael, Matti Silveri, RT Brierley, Victor V Albert, Juha Salmilehto, Liang Jiang, and Steven M Girvin, *New class of quantum error-correcting codes for a bosonic mode*, Physical Review X **6** (2016), no. 3, 031006.
- [18] Mazhar Mirrahimi, Zaki Leghtas, Victor V Albert, Steven Touzard, Robert J Schoelkopf, Liang Jiang, and Michel H Devoret, *Dynamically protected cat-qubits: a new paradigm for universal quantum computation*, New Journal of Physics **16** (2014), no. 4, 045014.
- [19] Sreraman Muralidharan, Jungsang Kim, Norbert Lütkenhaus, Mikhail D Lukin, and Liang Jiang, *Ultrafast and fault-tolerant quantum communication across long distances*, Physical review letters **112** (2014), no. 25, 250501.
- [20] Michael A Nielsen and Isaac Chuang, *Quantum computation and quantum information*, 2002.
- [21] Julien Niset, Ulrik Lund Andersen, and NJ Cerf, *Experimentally feasible quantum erasure-correcting code for continuous variables*, Physical review letters **101** (2008), no. 13, 130503.
- [22] Murphy Yuezhen Niu, Isaac L Chuang, and Jeffrey H Shapiro, *Hardware-efficient bosonic quantum error-correcting codes based on symmetry operators*, Physical Review A **97** (2018), no. 3, 032323.
- [23] Kyungjoo Noh, Victor V Albert, and Liang Jiang, *Improved quantum capacity bounds of gaussian loss channels and achievable rates with gottesman-kitaev-preskill codes*, arXiv preprint arXiv:1801.07271 (2018).