

Module 02

# Numpy Arrays

Data Science Developer

# Outline

- what is array ?
- Numpy ?
  - what is numpy ?
  - why should we use numpy ?
  - create numpy array from python list
  - create numpy array from some built-in method
- Attributes and methods for numpy array
  - shape
  - reshape
  - numerical method
  - data type

# What is Array ?

# What is Array ?

Array is a structured data type that store multiple value with the same type.

Array is mutable

Array has index and started from 0

Array has many form : 1D, 2D, 3D, ..., nD

# 1D Array

Value



|   |    |    |   |   |
|---|----|----|---|---|
| 5 | 11 | 34 | 1 | 4 |
|---|----|----|---|---|

Index



|   |   |   |   |   |
|---|---|---|---|---|
| 0 | 1 | 2 | 3 | 4 |
|---|---|---|---|---|

# 2D Array


|    |     |    |    |
|----|-----|----|----|
| 1  | 5   | -6 | 12 |
| 2  | -23 | 23 | -7 |
| 0  | 43  | 77 | 3  |
| 32 | -22 | 88 | 2  |

|   |
|---|
| 0 |
| 1 |
| 2 |
| 3 |

|   |   |   |   |
|---|---|---|---|
| 0 | 1 | 2 | 3 |
|---|---|---|---|

↑  
← Index

# 3D Array

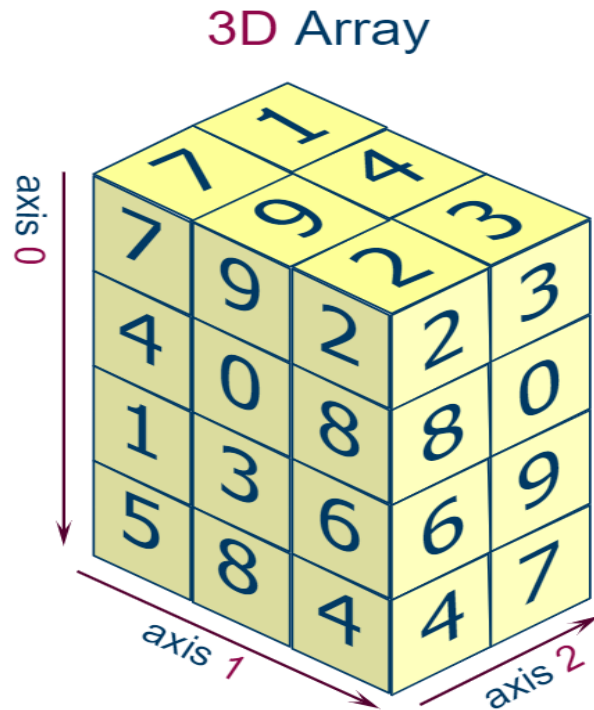

shape : (4, 3, 2)

|   |
|---|
| 0 |
| 1 |
| 2 |
| 3 |

|   |   |
|---|---|
| 0 | 1 |
|---|---|

|   |   |   |
|---|---|---|
| 0 | 1 | 2 |
|---|---|---|

Index

# Terminologies in Array

## What is an array?

| Dimensions | Example  | Terminology |     |       |        |     |       |       |     |       |  |
|------------|--|-------------|-----|-------|--------|-----|-------|-------|-----|-------|--|
| 1          | <table><tr><td>0</td><td>1</td><td>2</td></tr></table>   | 0           | 1   | 2     | Vector |     |       |       |     |       |  |
| 0          | 1  | 2           |     |       |        |     |       |       |     |       |  |
| 2          | <table><tr><td>0</td><td>1</td><td>2</td></tr><tr><td>3</td><td>4</td><td>5</td></tr><tr><td>6</td><td>7</td><td>8</td></tr></table>                               | 0           | 1   | 2     | 3      | 4   | 5     | 6     | 7   | 8     | Matrix                                     |
| 0          | 1  | 2           |     |       |        |     |       |       |     |       |  |
| 3          | 4  | 5           |     |       |        |     |       |       |     |       |  |
| 6          | 7  | 8           |     |       |        |     |       |       |     |       |  |
| 3          | <table><tr><td>0</td><td>1</td><td>2</td></tr><tr><td>3</td><td>4</td><td>5</td></tr><tr><td>6</td><td>7</td><td>8</td></tr></table>                               | 0           | 1   | 2     | 3      | 4   | 5     | 6     | 7   | 8     | 3D Array<br>(3 <sup>rd</sup> order Tensor) |
| 0          | 1  | 2           |     |       |        |     |       |       |     |       |  |
| 3          | 4  | 5           |     |       |        |     |       |       |     |       |  |
| 6          | 7  | 8           |     |       |        |     |       |       |     |       |  |
| N          | <table><tr><td>0 1 2</td><td>...</td><td>0 1 2</td></tr><tr><td>3 4 5</td><td>...</td><td>3 4 5</td></tr><tr><td>6 7 8</td><td>...</td><td>6 7 8</td></tr></table> | 0 1 2       | ... | 0 1 2 | 3 4 5  | ... | 3 4 5 | 6 7 8 | ... | 6 7 8 | ND Array                                   |
| 0 1 2      | ...  | 0 1 2       |     |       |        |     |       |       |     |       |  |
| 3 4 5      | ...  | 3 4 5       |     |       |        |     |       |       |     |       |  |
| 6 7 8      | ...  | 6 7 8       |     |       |        |     |       |       |     |       |  |



# Numpy

# Numpy

- Numpy is a python library used for working with array
- Numpy also can be used to work with linear algebra, matrix operation, and any advance math operation
- Numpy stand for = Numerical Python

How to use numpy in python ?

```
In [1]: import numpy as np
```

# Why should we use numpy ?

- Array are 50x faster than python list
- Numpy array has a lot of supported function
- Array area frequently used in data science, where speed and resource are very important

# Creating Numpy Arrays From a Python List

```
In [19]: my_list = [1,2,3]  
my_list
```

```
Out[19]: [1, 2, 3]
```

```
In [16]: np.array(my_list)
```

```
Out[16]: array([1, 2, 3])
```

```
In [20]: my_matrix = [[1,2,3],[4,5,6],[7,8,9]]  
my_matrix
```

```
Out[20]: [[1, 2, 3], [4, 5, 6], [7, 8, 9]]
```

```
In [21]: np.array(my_matrix)
```

```
Out[21]: array([[1, 2, 3],  
                [4, 5, 6],  
                [7, 8, 9]])
```

1D Array

2D Array

# Creating Numpy Arrays

## From a Python List

```
In [7]: my_list3 = [  
        [[1,2,3],[4,5,6],[7,8,9]],  
        [[10,11,12],[13,14,15],[16,17,18]],  
        [[19,20,21],[22,23,24],[25,26,27]]  
        ]
```

```
In [8]: np.array(my_list3)
```

```
Out[8]: array([[ [ 1,  2,  3],  
                [ 4,  5,  6],  
                [ 7,  8,  9]],  
              [[10, 11, 12],  
               [13, 14, 15],  
               [16, 17, 18]],  
              [[19, 20, 21],  
               [22, 23, 24],  
               [25, 26, 27]]])
```

3D Array

# Built-in Methods

## arange

```
In [22]: np.arange(0,10)
```

```
Out[22]: array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
```

```
In [23]: np.arange(0,11,2)
```

```
Out[23]: array([ 0,  2,  4,  6,  8, 10])
```

# Built-in Methods

## zeros and ones

```
In [24]: np.zeros(3)
```

```
Out[24]: array([ 0.,  0.,  0.])
```

```
In [26]: np.zeros((5,5))
```

```
Out[26]: array([[ 0.,  0.,  0.,  0.,  0.],
                 [ 0.,  0.,  0.,  0.,  0.],
                 [ 0.,  0.,  0.,  0.,  0.],
                 [ 0.,  0.,  0.,  0.,  0.],
                 [ 0.,  0.,  0.,  0.,  0.]])
```

```
In [27]: np.ones(3)
```

```
Out[27]: array([ 1.,  1.,  1.])
```

```
In [28]: np.ones((3,3))
```

```
Out[28]: array([[ 1.,  1.,  1.],
                 [ 1.,  1.,  1.],
                 [ 1.,  1.,  1.]])
```

# Built-in Methods

## linspace

```
In [29]: np.linspace(0,10,3)
```

```
Out[29]: array([ 0.,  5., 10.])
```

```
In [31]: np.linspace(0,10,50)
```

```
Out[31]: array([ 0.          ,  0.20408163,  0.40816327,  0.6122449 ,
 0.81632653,  1.02040816,  1.2244898 ,  1.42857143,
 1.63265306,  1.83673469,  2.04081633,  2.24489796,
 2.44897959,  2.65306122,  2.85714286,  3.06122449,
 3.26530612,  3.46938776,  3.67346939,  3.87755102,
 4.08163265,  4.28571429,  4.48979592,  4.69387755,
 4.89795918,  5.10204082,  5.30612245,  5.51020408,
 5.71428571,  5.91836735,  6.12244898,  6.32653061,
 6.53061224,  6.73469388,  6.93877551,  7.14285714,
 7.34693878,  7.55102041,  7.75510204,  7.95918367,
 8.16326531,  8.36734694,  8.57142857,  8.7755102 ,
 8.97959184,  9.18367347,  9.3877551 ,  9.59183673,
 9.79591837, 10.          ])
```



# Built-in Methods

## eye

```
In [11]: np.eye(4)
```

```
Out[11]: array([[1., 0., 0., 0.],  
                [0., 1., 0., 0.],  
                [0., 0., 1., 0.],  
                [0., 0., 0., 1.]])
```

# Built-in Methods

## random.rand

```
In [47]: np.random.rand(2)
```

```
Out[47]: array([ 0.11570539,  0.35279769])
```

```
In [19]: np.random.rand(5,5)
```

```
Out[19]: array([[0.46733762, 0.61821618, 0.55572844, 0.66595536, 0.82351667],  
                [0.6767309 , 0.21507597, 0.80908423, 0.31201054, 0.89075435],  
                [0.79426775, 0.19536746, 0.29059715, 0.24310793, 0.1538956 ],  
                [0.27480898, 0.0868552 , 0.46727468, 0.25064969, 0.35202803],  
                [0.09306495, 0.39282406, 0.96541148, 0.08188501, 0.54730353]])
```

# Built-in Methods

## random.randn

```
In [17]: np.random.randn(2)
```

```
Out[17]: array([1.15178134, 0.81114334])
```

```
In [21]: np.random.randn(5,5)
```

```
Out[21]: array([[ -0.61466551,  0.56820696, -0.90523534,  1.63720345,  0.23213716],
                [ -0.55540677,  1.49907936, -0.3743271 , -0.73975908, -0.49645825],
                [  0.05348141, -0.78840726, -1.33904729,  0.22485744, -1.1621428 ],
                [ -1.57131486, -0.96163608, -0.60896763, -0.05697113, -0.24200832],
                [  0.11211018, -1.78386241,  0.03627135, -1.80388622, -1.20737987]])
```

# Built-in Methods

## random.randint

```
In [50]: np.random.randint(1,100)
```

```
Out[50]: 44
```

```
In [4]: np.random.randint(1,100, 10)
```

```
Out[4]: array([ 6, 93, 20, 34, 84, 14, 21, 25, 69, 59])
```

# Attributes and Methods for Numpy Array

# Array Attributes and Methods

## shape

```
In [27]: my_list = [1,2,3]
         array_1d = np.array(my_list)

         my_list2 = [[1,2,3],[4,5,3],[7,8,9]]
         array_2d = np.array(my_list2)

         my_list3 = [
             [[1,2,3],[4,5,6],[7,8,9]],
             [[10,11,12],[13,14,15],[16,17,18]],
             [[19,20,21],[22,23,24],[25,26,27]]
         ]
         array_3d = np.array(my_list3)
```

```
In [28]: array_1d.shape
```

```
Out[28]: (3,)
```

```
In [29]: array_2d.shape
```

```
Out[29]: (3, 3)
```

```
In [30]: array_3d.shape
```

```
Out[30]: (3, 3, 3)
```

# Array Attributes and Methods

## reshape

```
In [37]: array_2d.reshape(-1)
```

```
Out[37]: array([1, 2, 3, 4, 5, 3, 7, 8, 9])
```

```
In [38]: array_2d.reshape(-1).shape
```

```
Out[38]: (9,)
```

```
In [45]: array_3d.reshape(-1)
```

```
Out[45]: array([ 1,  2,  3,  4,  5,  6,  7,  8,  9, 10, 11, 12, 13, 14, 15, 16, 17,
                18, 19, 20, 21, 22, 23, 24, 25, 26, 27])
```

```
In [46]: array_3d.reshape(-1).shape
```

```
Out[46]: (27,)
```

# Array Attributes and Methods

```
In [7]: arr = np.arange(25)  
        ranarr = np.random.randint(0,50,10)
```

```
In [8]: arr
```

```
Out[8]: array([ 0,  1,  2,  3,  4,  5,  6,  7,  8,  9, 10, 11, 12, 13, 14, 15, 16,  
               17, 18, 19, 20, 21, 22, 23, 24])
```

```
In [57]: ranarr
```

```
Out[57]: array([10, 12, 41, 17, 49,  2, 46,  3, 19, 39])
```



# Array Attributes and Methods

## reshape

```
In [9]: # Vector  
arr.shape
```

```
Out[9]: (25,)
```

```
In [66]: # Notice the two sets of brackets  
arr.reshape(1,25)
```

```
Out[66]: array([[ 0,  1,  2,  3,  4,  5,  6,  7,  8,  9, 10, 11, 12, 13, 14, 15, 16,  
                17, 18, 19, 20, 21, 22, 23, 24]])
```

```
In [69]: arr.reshape(1,25).shape
```

```
Out[69]: (1, 25)
```

# Array Attributes and Methods

## reshape

```
In [70]: arr.reshape(25,1)
```

```
Out[70]: array([[ 0],
 [ 1],
 [ 2],
 [ 3],
 [ 4],
 [ 5],
 [ 6],
 [ 7],
 [ 8],
 [ 9],
 [10],
 [11],
 [12],
 [13],
 [14],
 [15],
 [16],
 [17],
 [18],
 [19],
 [20],
 [21],
 [22],
 [23],
 [24]])
```

```
In [76]: arr.reshape(25,1).shape
```

```
Out[76]: (25, 1)
```

# Array Attributes and Methods

## reshape

```
In [49]: arr.reshape(5,5)
```

```
Out[49]: array([[ 0,  1,  2,  3,  4],  
                [ 5,  6,  7,  8,  9],  
                [10, 11, 12, 13, 14],  
                [15, 16, 17, 18, 19],  
                [20, 21, 22, 23, 24]])
```

# Array Attributes and Methods

## max, min, argmax, argmin

```
In [64]: ranarr
```

```
Out[64]: array([10, 12, 41, 17, 49,  2, 46,  3, 19, 39])
```

```
In [61]: ranarr.max()
```

```
Out[61]: 49
```

```
In [62]: ranarr.argmax()
```

```
Out[62]: 4
```

```
In [63]: ranarr.min()
```

```
Out[63]: 2
```

```
In [60]: ranarr.argmin()
```

```
Out[60]: 5
```

# Array Attributes and Methods

## dtype

```
In [52]: arr.dtype
```

```
Out[52]: dtype('int32')
```

```
In [60]: arr1 = np.array(['1', 'test', '5.0'])
```

```
In [62]: arr1.dtype
```

```
Out[62]: dtype('<U4')
```