

Practice Lab:

Install DSE Ops Center, Call to Manage Existing Cluster

- This Practice Lab is dependent on Discussion Unit 6250, where most of the objects we create in this lab were introduced.
- In this Practice Lab, we install Ops Center, the Ops Center agent, and call to manage an existing cluster.

Challenge: Overview

Prerequisites:

- Instructions are provided for Linux
- We will operate below recommended settings; 1 OS node only, minimum 8 GB RAM, 12 GB RAM preferred

Challenges 1-4:

- Make a single node DSE cluster with a real IP address
- Manually install the Ops Center agent
- Install Ops Center
- Tell Ops Center to manage the DSE cluster above



Challenge 1: Single node DSE with real IP addr

- Leverage lab instructions from 6207, Keyspace Lab
- Make certain hostname resolves
ping `hostname`
ifconfig (or Google how)
vi /etc/hosts
- Ensure firewall is disabled
(CentOs 7 below, or Google)
systemctl disable firewallld

Edits given IP addr of 172.16.119.194

cassandra.yaml

- seeds: "172.16.119.194"

listen_address: 172.16.119.194

native_transport_address:
172.16.119.194

cassandra-env.sh

MAX_HEAP_SIZE="2048M"

HEAP_NEWSIZE="200M"

JMX_PORT="7499"

dse cassandra -f -R

Challenge 2: Ops Center Agent (manual install)



- Ops Center can install its agent automatically
- But, manual install today because ..
 - Run agent in foreground, easier diagnostics
 - This is an odd install, multiple entities may try to take localhost/127.0.0.1, better control via manual install

Challenge 2: Ops Center Agent (manual install)

Create a download key
from,
[https://
academy.datastax.com/
downloads](https://academy.datastax.com/downloads)

Value used on
next page



Search 

DOWNLOAD DATASTAX 

CONTACT



MY PROGRESS

MY ACCOUNT 

[DATASTAX.COM HOME](#) [ACADEMY HOME](#) [DOCS](#)

LEARN 

[DISTRIBUTED DATA SHOW](#)

[SUCCESS SEGMENTS](#)

[COMMUNITY](#) 

Downloads Key

Create/Edit your downloads key:

Use this key with your email as credentials for downloads/updates. [Read more...](#)

SAVE KEY

Challenge 2: Ops Center Agent (manual install)

```
mkdir /opt/ops_center_agent  
cd /opt/ops_center_agent
```



Download agent via,

```
curl --user your\_name@aol.com:your\_key -L \  
ht tp://downloads.datastax.com/enterprise/datastax-agent-6.5.0.tar.gz \  
| tar xz
```

Wrong version (6.5.0) other ?

gzip: stdin: not in gzip format

tar: Child returned status 1

tar: Error is not recoverable: exiting now

Challenge 2: Ops Center Agent (manual install)



The previous command outputs files-

```
cd /opt/ops_center_agent/conf
```

```
vi ./conf/address.yaml  
  stomp_interface: 127.0.0.1  
  use_ssl: 0
```

```
cd ../bin  
./datastax-agent -f
```

Challenge 3: Ops Center install


```
mkdir /opt/ops_center  
cd /opt/ops_center
```

Download Ops Center 6.5.0 from,
<https://academy.datastax.com/quick-downloads>
(Version 6.5.0 instructions here.)

```
./bin/opscenter -f
```

<http://localhost:8888/>
Answers on both localhost and (actual IP addr)

Challenge 4: Ops Center, First steps

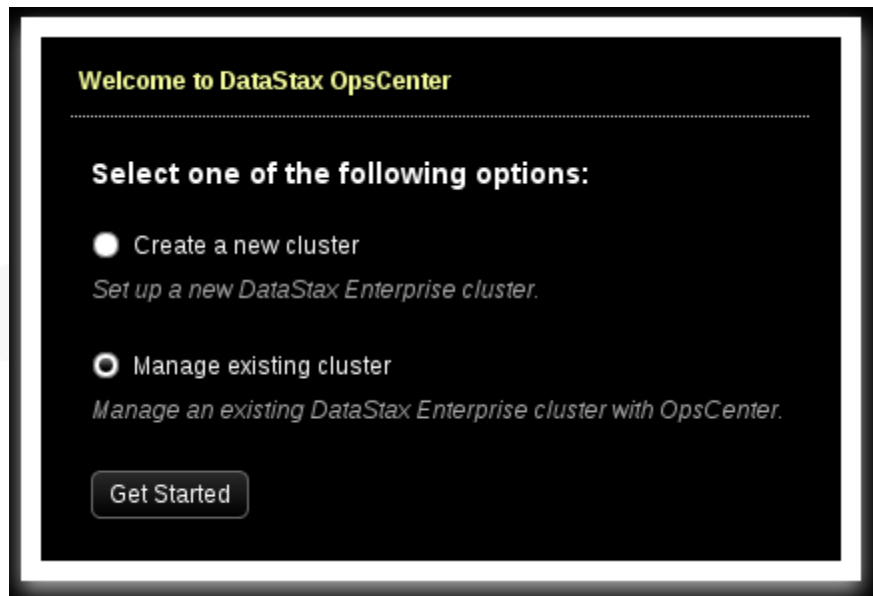

As a first time boot of Ops Center, you receive the modal dialog box shown at left-


Choose (existing), and Click, Get Started

Challenge 4:

Enter the IP address and JMX port number of the existing DSE cluster we created in Challenge 1.

No security, leave these


Click, Next

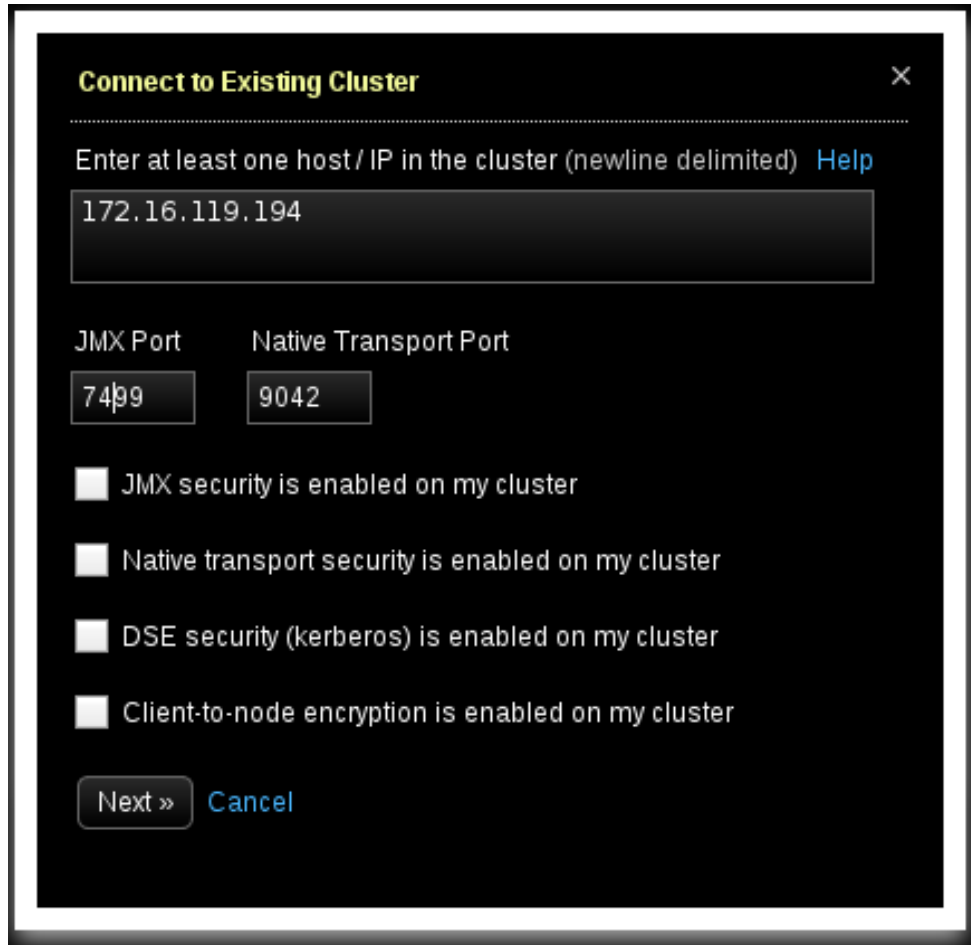

The screenshot shows a dark-themed dialog box titled "Connect to Existing Cluster" with a close button (X) in the top right corner. Below the title bar, there is a text prompt: "Enter at least one host / IP in the cluster (newline delimited) [Help](#)". A text input field contains the IP address "172.16.119.194". Below this, there are two input fields: "JMX Port" with the value "7499" and "Native Transport Port" with the value "9042". Underneath these are four unchecked checkboxes with the following labels: "JMX security is enabled on my cluster", "Native transport security is enabled on my cluster", "DSE security (kerberos) is enabled on my cluster", and "Client-to-node encryption is enabled on my cluster". At the bottom of the dialog are two buttons: "Next »" and "Cancel".

Challenge 4:

Check, Install Agents Manually, then Click Close.

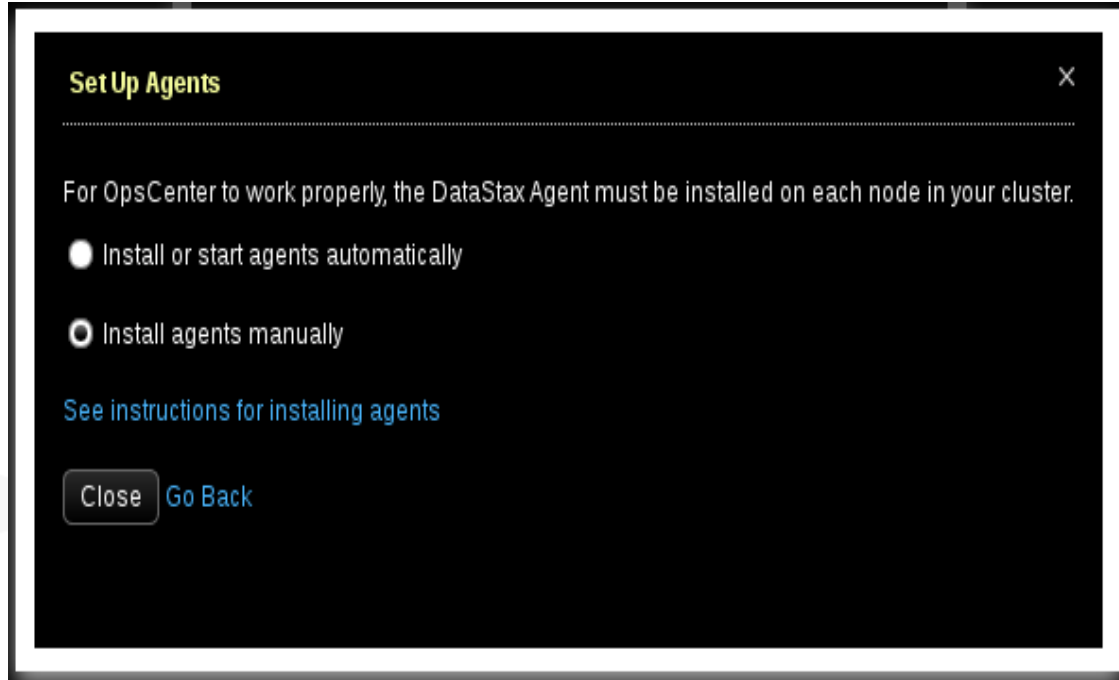

localhost:8888/opscenter/index.html

Google z Content 1 http://localhost:8081/ DataStax Studio Solr Admin Spark Master at spark:/... DSE 5.1 Resource Man... Introducing AlwaysOn ...

DATASTAX OpsCenter 6.5.0 NEW CLUSTER | ALERTS 0 | SETTINGS | HELP

Lifecycle Manager Overview my_cluster

my_cluster: Nodes 0 Alerts

DataStax Enterprise Server 6.0.0 Cluster Actions

Hide

Health

Normal 1
Medium 0
High 0
Down 0
Unknown 0

Data Size

Total Size 114 KB
Avg. Node 114 KB
+/- 0 bytes

Services

Repair
Not running

Backup
No Scheduled Backups
Recent: 0 successful, 0 failed

Performance
Table Metrics: On
Thread Pool Stats: On
Slow Query Log: On

Best Practices
Rules passed: 0
Rules failed: 0

NodeSync
NodeSync is enabled, but no tables have been configured.

PING LIST AGENTS

NAME	DATACENTER	RACK	HTTP	STOMP	JMX	STORAGE DSE	MONITORED DSE	LAST KNOWN VERSION	LAST INSTALL S
Healthy (1 Agent)									
Agents are healthy.									
The following agents are installed and connected.									
rhost00.grid	DCn	RACn	✓	✓	✓	✓	✓	6.5.0	

Challenges 1-4: Success

Practice Lab:

Lessons Learned



