

Practice Lab:


DSE Cluster Creation

- This Practice Lab has no specific preceding Discussion Unit.
- In this Practice Lab, **members of the class each create one node** that will belong to a single DSE cluster.
- Instructions in this practice lab are written for CentOS 7 using the command line, but should function for most Linux distros.

Challenge: Create a DSE Cluster

Prerequisites:

- That each attendee is on the same subnet
 - We are likely using non route-able private network addresses
 - That means your node must be on your base OS. Else, **you** are responsible for figuring out port forwarding/similar; (not the fastest path)
- All work done as 'root'

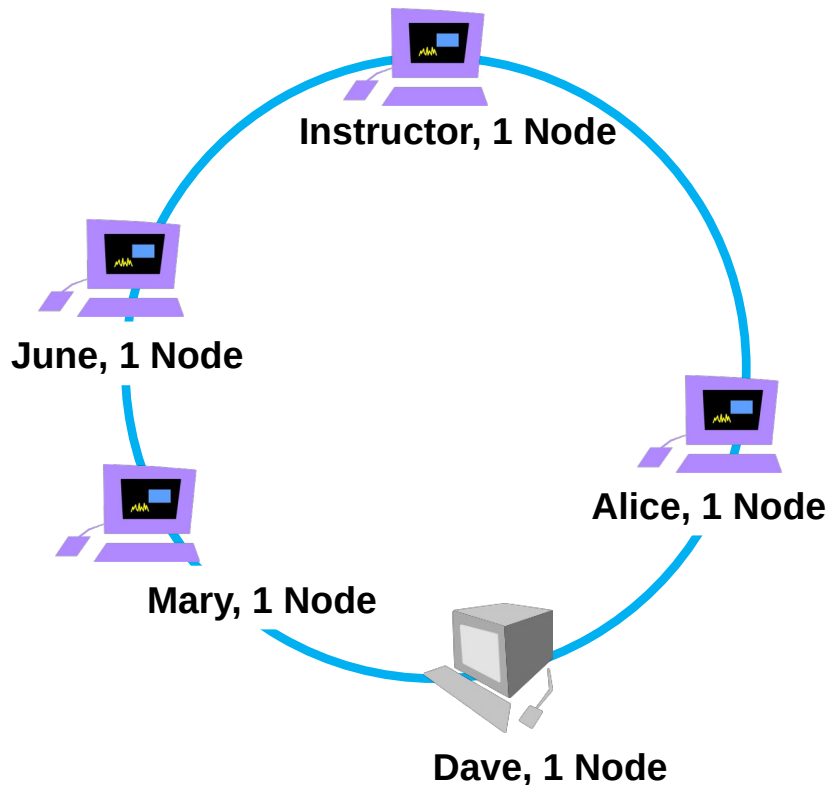

Challenge: Create a DSE Cluster, You will receive a spreadsheet

	A	B	C	D	E	F	G
1	User	IP	Cluster	DC	Rack	Workload	
2	Tony	10.200.25.39	BootCamp19	Red	Leader	SearchAnalytics + Graph	Seed Node
3	Sourav	10.200.21.59	BootCamp19	Red	One	SearchAnalytics + Graph	
4	James			Red	Two		
5	Dave			Red	Three		
6	Don	10.200.20.163	BootCamp19	Red	Four		
7	Amit	10.200.22.29	BootCamp19	Gold	Leader		
8	Fred	10.200.22.245	BootCamp19	Gold	One	SearchAnalytics + Graph	
9	Naushad	10.200.25.190	BootCamp19	Gold	Two		
10	Alicia	10.200.24.15	BootCamp19	Gold	Three		
11	Farrell			Gold	Four		

Challenge 1: You are done When ..



You are done when:

- nodetool reports that you have joined the cluster and are healthy; you're balanced, other
- Feel free to communicate with other attendees. If a Slack channel is available for the class, use Slack/other.

Practice Lab:

Lessons Learned



