

| ш | ш |
|---|---|

- Chrome Remote Desktop □□□□
- Archlinux 🖂 🖂 🖂 🖂 🖂 🖂 🖂 🖂 🖂
- Linux 🔲 Chrome 🔠 🖟 Windows/ OS X 🖂 🖂

| • Bonus[][][][] |
|------------------|
| |
| |
| |
| Xorg |
| ssh X forwarding |
| |

NAT ANDANA NAT ANDANDANDANDANDANDANDANDANDANDAN N □□□□□ Chrome Remote Desktop □□□□□

Chrome Remote Desktop □□



Chrome Remote Desktop [][]

| Google remote-desktop |
|--|
| TOUTH TO THE STATE OF THE STATE |
| 33333333333333333333333333333333333333 |

| 00000000000000000000000000000000000000 |
|--|
| Ubuntu 12.10 |
| |
| chrome-remote-desktop Windows/OS |
| X 🛮 🔻 🖂 🖂 🖂 Remote Desktop Host Controller 🖂 archlinux |
| [archlinuxcn] ODOODOODOODOODOO ALIR OO |

\$ pacman -Ss chrome-remote-desktop archlinuxcn/chrome-remote-desktop 40.0.2214.44-1 Allows you to securely access your computer over the Internet thro ugh Chrome.

groupadd [[] ID "chrome-remote-desktop"

Please create ~/.config/chrome-remotedesktop folder manually, if it doesn't exist, or else you can't use CRD. The needed files are created by the Chrome app, inside the chrome-remote-desktop folder, after Enabling Remote Connections. To {enable,start} the service use systemctl -user {enable,start} chrome-remote-desktop

You may need to create a ~/.chromeremote-desktop-session file with commands to start your session

Go to

https://support.google.com/chrome/answer/1 649523 for more information.

| ☐ chror | |
|------------------|---|
| 1 top | \$ /opt/google/chrome-remote-desktop/chrome-remote-desk add-user |
|] | ~/.config/chrome-remote-desktop |
| 1 | \$ mkdir ~/.config/chrome-remote-desktop |
| x. | |
| 1 2 3 4 | \$ cat ~/.chrome-remote-desktop-session #!/bin/bash startxfce4 \$ chmod 755 .chrome-remote-desktop-session |
| | |
| | 我的计算机 Z yang-z800 |

如果您想使用 Chrome 远程桌面来访问此计算机,就必须后用远程连接。


____ Archlinux ___ chromium ___ aur/google-

启用远程连接

| chrome |
|--|
| 32 Linux Chrome Remote Desktop |
| PIN Google |
| 我的计算机 |
| yang-z800 |
| farseerfc-vaio-arch |
| |
| 1 \$ ls .config/chrome-remote-desktop2 chrome-profile host#8cfe7ecfd6bb17955c1ea22f77d0d800.json pulseaudio#8cfe7ecfd6 |
| systemdsystemctluser enable _ |
| 1 \$ systemctluser start chrome-remote-desktop.service |
| chrome-remote-desktopXorg [|

| 6008 | farseerfc | 20 | 0 | 97448 | 11384 | 2888 S | 0.0 | 0.1 | 0:00.00 | /usr/bin/python2 /opt/google/chrome-remote-desktop/chrome-remote-desktopsta |
|------|-----------|----|---|-------|-------|---------|-----|-----|---------|---|
| 6033 | farseerfc | 20 | 0 | 465M | 41224 | 23408 S | 0.0 | 0.5 | 0:18.73 | /opt/google/chrome-remote-desktop/chrome-remote-desktop-hosthost-config= |
| 6032 | farseerfc | | | 18788 | | 2672 S | 0.0 | 0.0 | 0:00.00 | /bin/bash /home/farseerfc/.chrome-remote-desktop-session |
| 6034 | farseerfc | 20 | | 18788 | 3072 | 2648 S | 0.0 | 0.0 | 0:00.00 | /bin/sh /etc/xdg/xfce4/xinitrc /etc/X11/xinit/xserverrc |
| 6040 | farseerfc | | | | | 17340 S | | | 0:00.12 | └ xfce4-session |
| 6079 | farseerfc | | | 18436 | 3004 | 2676 S | 0.0 | 0.0 | 0:00.01 | - stalonetray |
| 6014 | farseerfc | 20 | | | 92664 | 18752 S | 0.0 | | 0:04.04 | Xvfb :20 =auth /home/farseerfc/.Xauthority -nolisten tcp -noreset -screen C |
| 897 | farseerfc | | | | | 0.5 | 0.0 | 0.0 | 0.00 00 | (sd-pam) INTERESTINE |

htop [][][] chrome-remote-desktop [][][][][] Xorg

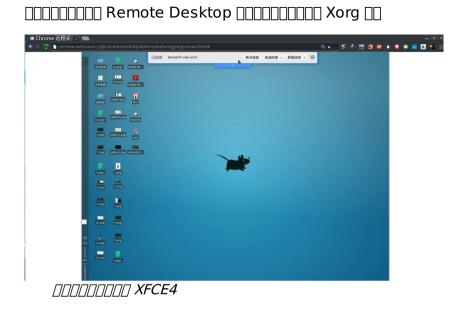

| Linux 🛮 🖺 🗎 | Chrome [] [] |
|-------------|--------------|
| Windows/ | OS X 🛮 🗎 🗎 |

| 0000000 X 000000 Linux0000000000000000000 X |
|--|
| |
| |
| Chrome Linux Host Controller beta |
| □ Ubuntu 12.04 □ 12.10 □14.04□□□□□ <u>Bug</u> □□□□□□□□□□□□□□□□ |
| $\sqcap \sqcap$ |

Bonus | | | | | | | | | |

□□□□ Chrome □□□□ App

