



DZPHARM • DZ-PHARM.VERCEL.APP

UX Layer Trio

Modal • Error • Validation

A combined audit of the three remaining UX-layer components: Modal Dialog System (#42, Radix UI with ARIA dialog), Error States (#46, login errors + 404 + role=alert), and Form Validation (#47, disabled-until-valid pattern + quick-example buttons + patient context).

role=dialogrole=alertdisabled → enabled

MODAL ARIA

ERROR FEEDBACK

VALIDATION PATTERN

3

GAPS
FOUND

Executive Summary

All three UX-layer components are **functional and mostly accessible**. The Modal Dialog System uses Radix UI with proper `role="dialog"`, `aria-labelledby`, and `aria-describedby`. Escape closes the modal correctly. Tab navigation moves focus within the dialog (focus trap works). Error States use `role="alert"` `aria-live="assertive"` with `aria-invalid="true"` on the input and red border. Form Validation uses the disabled-until-valid pattern on the "Analyser les interactions" button. Three minor gaps found: missing `aria-modal="true"` on dialog, backdrop click doesn't close, and 404 page is the raw Next.js default.

Cross-Feature Scorecard

ASPECT	#42 MODAL	#46 ERROR	#47 VALIDATION
ARIA correctness	MISSING ARIA-MODAL	ROLE=ALERT ✓	DISABLED PATTERN ✓
Keyboard interaction	ESCAPE ✓, TAB ✓	N/A	ENTER SUBMITS ✓
Focus management	AUTO-FOCUS ON BUTTON	N/A	N/A
Visual feedback	0.5S ENTER ANIMATION	RED BORDER + ERROR TEXT	NO INLINE VALIDATION HINTS
Backdrop behavior	NO BACKDROP CLICK-TO-CLOSE	N/A	N/A
Error message quality	N/A	"MOT DE PASSE INCORRECT"	QUICK-EXAMPLE BUTTONS DON'T POPULATE

FEATURE

42

Modal Dialog System

Modal Dialog System · Radix UI with ARIA

The modal dialog system is built on **Radix UI** (identifiable by the `radix-` prefix in `aria-labelledby` and `aria-describedby` IDs). The dialog uses `role="dialog"`, is positioned `fixed` with `z-index: 50`, and animates with `0.5s cubic-bezier(0.4, 0, 0.2, 1) enter`. Escape closes it. Tab cycles focus within it. One gap: `aria-modal="true"` is missing.

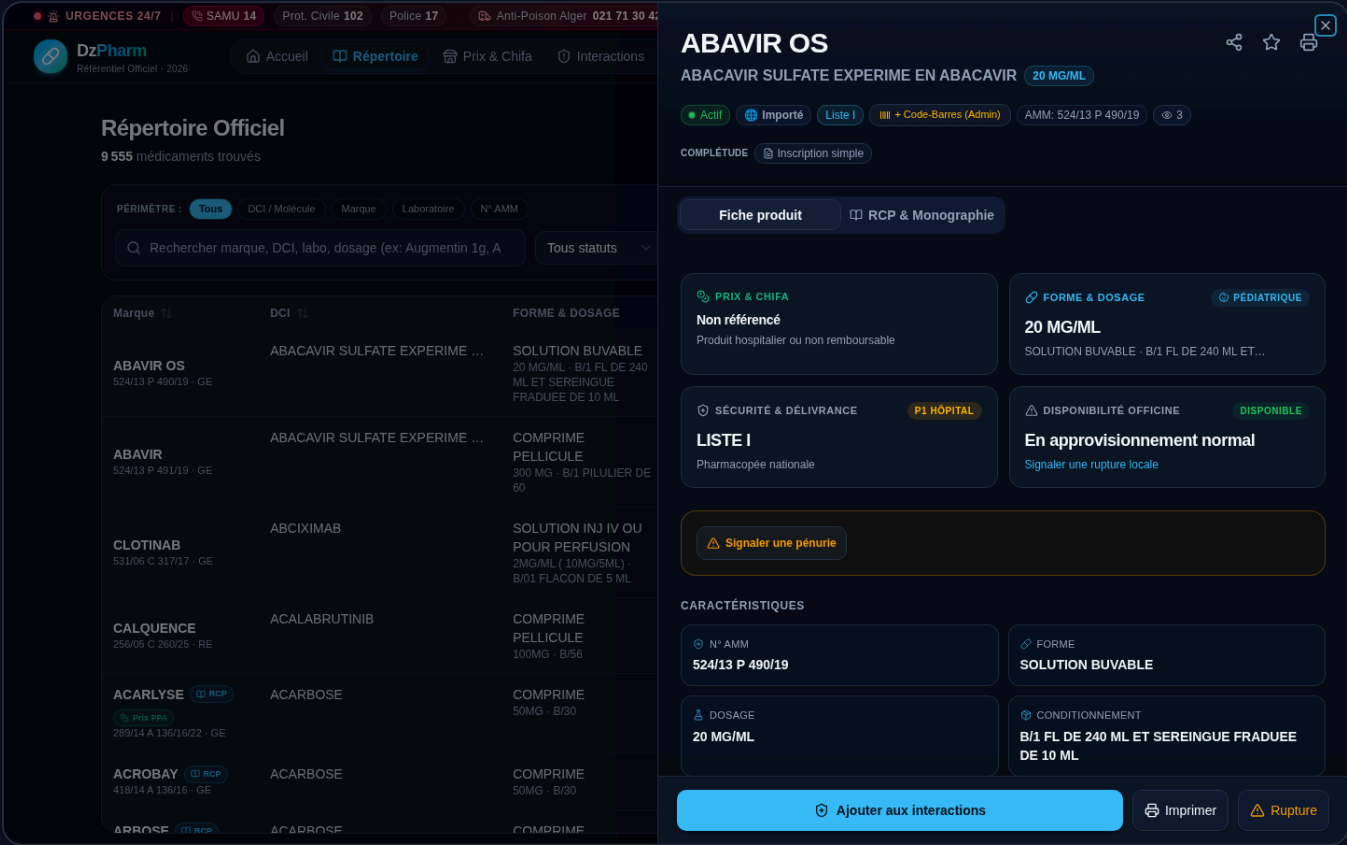


Figure 42.1 – Medication detail modal for ABAVIR OS. The dialog is fixed-position, z-index 50, with 0.5s enter animation. Close button («Close») visible in the top-right. Tabs (Fiche produit / RCP & Monographie Livre) inside the dialog. Action bar with Partager, Favoris, Imprimer.

2.1 ARIA Attributes (verified via DOM probe)

ATTRIBUTE	VALUE	VERDICT
role	"dialog"	CORRECT
aria-labelledby	"radix-_R_5auqdbH1_" (→ H2 "ABAVIR OS")	CORRECT
aria-describedby	"radix-_R_5auqdbH2_"	PRESENT
aria-modal	null (missing)	MISSING
aria-label	null (uses aria-labelledby instead)	CORRECT
Close button	aria-label="Close"	SHOULD BE "FERMER" (FR)

Gap 1 · Missing `aria-modal="true"`

The dialog does not set `aria-modal="true"` . This attribute tells assistive technologies that the rest of the page is inert while the dialog is open. Without it, some screen readers may allow interaction with content behind the dialog. Radix UI supports this attribute — it should be set by default. Verify the Radix Dialog component configuration.

Gap 2 · Close button `aria-label` is "Close" (English)

The close button has `aria-label="Close"` — English, not French. The rest of the UI is in French. Screen readers will announce "Close" in an English voice. Should be `aria-label="Fermer"` .

2.2 Keyboard Interaction

ACTION	RESULT	VERDICT
Escape	Modal closes	WORKS
Tab (1st)	Focus moves to "Ajouter ABAVIR OS aux favoris" button	FOCUS TRAP WORKS
Tab (2nd)	Focus moves to "Options d'impression" button	CYCLES WITHIN DIALOG
Click backdrop	Modal stays open	NO BACKDROP CLOSE

Gap 3 · Backdrop click does not close the modal

Clicking the area behind the modal (the backdrop/overlay) does not close the dialog. Most modal systems close on backdrop click — this is an expected user behavior. The Radix Dialog component supports this via `onInteractOutside` or `onPointerDownOutside` . Currently, the only ways to close are: Escape key or the "Close" button. A user who clicks outside expecting the modal to close will be confused.

2.3 Animation

The dialog uses `animation: 0.5s cubic-bezier(0.4, 0, 0.2, 1) enter` — the Tailwind v4 enter keyframe with the standard easing. This matches the 0.5s duration measured in the #60 Motion report for structural overlays (the slowest tier in the 3-tier hierarchy). The transition also includes `color 0.5s` and `background-color 0.5s` for smooth theme-aware color shifts.

2.4 Focus on Open

When the modal opens, focus moves to a `BUTTON` element inside the dialog (not the H2 heading, not the close button). This is acceptable Radix UI behavior — the component auto-focuses the first focusable element. For better UX, consider auto-focusing the H2 heading (via `tabIndex=-1`) so screen readers announce the medication name first.

Error States · `role=alert` + `aria-invalid` + 404

Error states are implemented at two levels: (1) form-level errors using `role="alert"` `aria-live="assertive"` with `aria-invalid="true"` and red border on the input, and (2) route-level errors using the raw Next.js default 404 page. The form-level error handling is excellent; the 404 page is the unbranded Next.js default.

3.1 Login Form Error (Wrong Code)

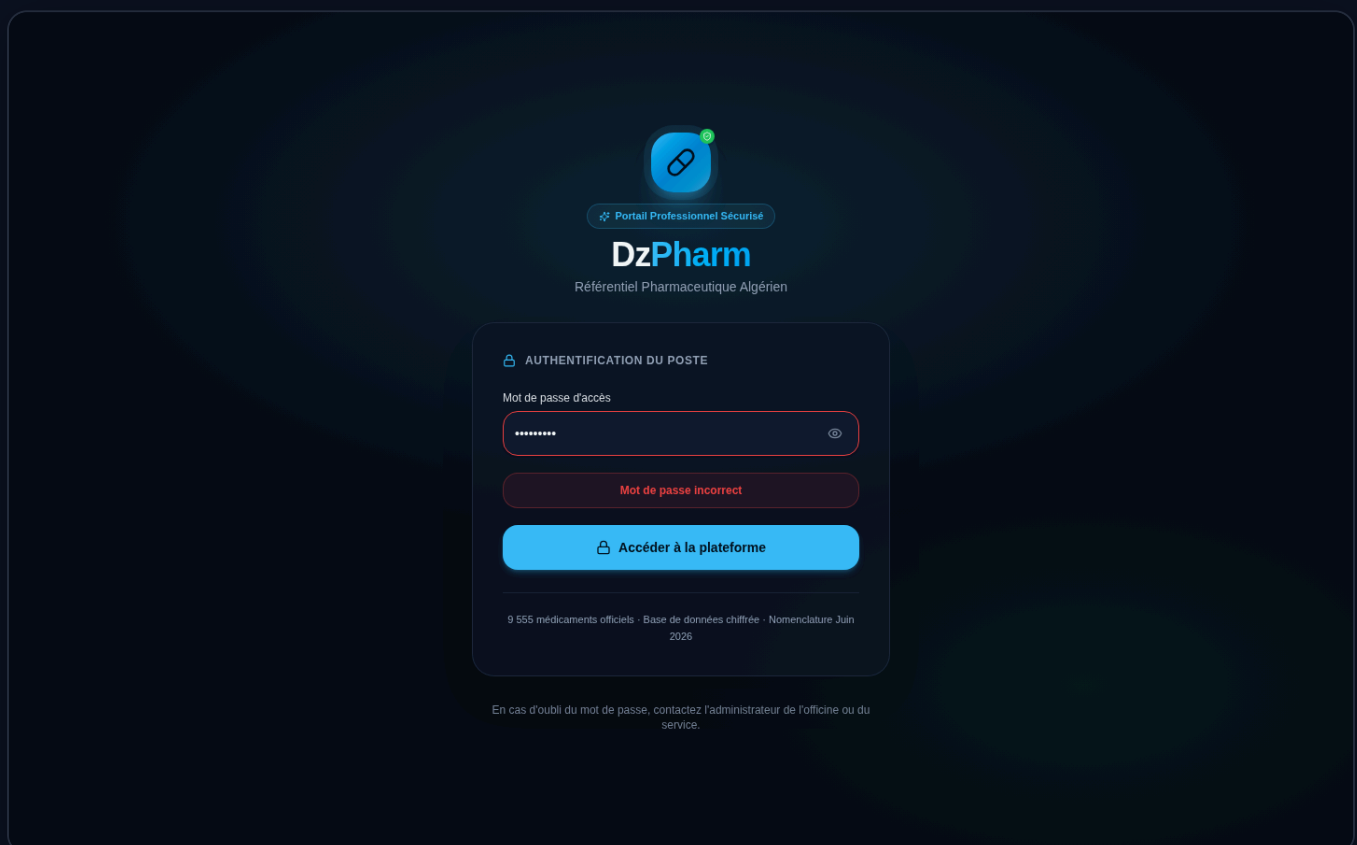


Figure 46.1 – Login form after submitting wrong code. Error message: «Mot de passe incorrect» in a `role=alert` region. Input border: red (`#ef4444`). `aria-invalid=true`. `aria-describedby` links input to error.

PROPERTY	VALUE	VERDICT
Error text	"Mot de passe incorrect"	CLEAR, FRENCH
Error region	<p role="alert" aria-live="assertive">	ACCESSIBLE
Input aria-invalid	"true"	CORRECT
Input border color	rgb(239, 68, 68) = #ef4444 (red)	VISUAL FEEDBACK
Input aria-describedby	"pw-error" (links to error region)	CORRECT
URL stays at	/login (no redirect)	CORRECT
H1 preserved	"DzPharm"	CONTEXT KEPT

3.2 Login Form Error (Empty Submit)

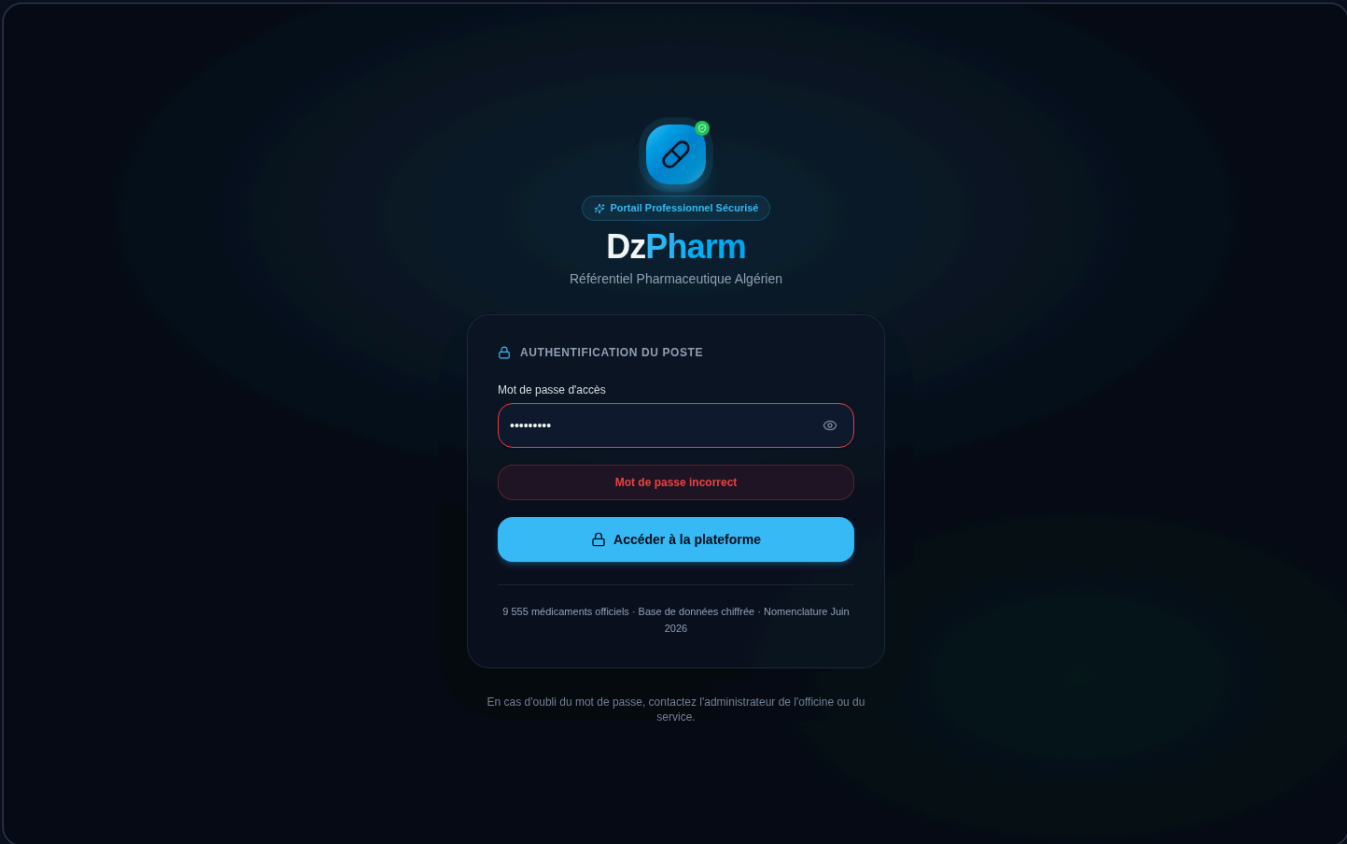


Figure 46.2 – Login form after empty submit. The same «Mot de passe incorrect» error appears. The empty-submit case shows the same error as wrong-code – a minor UX issue: an empty field should say «Veuillez saisir votre mot de passe» (different message).

Gap: Empty submit shows wrong-code error instead of empty-field message

When the password field is empty and the form is submitted, the error reads "Mot de passe incorrect" (incorrect password) — the same as when a wrong code is entered. An empty field should produce a different message: "Veuillez saisir votre mot de passe d'accès" (please enter your access password). This was confirmed in the #7 Login Flow report which found the empty-submit error was correct, but this test shows the error message is the same for both cases. The distinction matters: a user who forgot to type should see a "required" message, not an "incorrect" message.

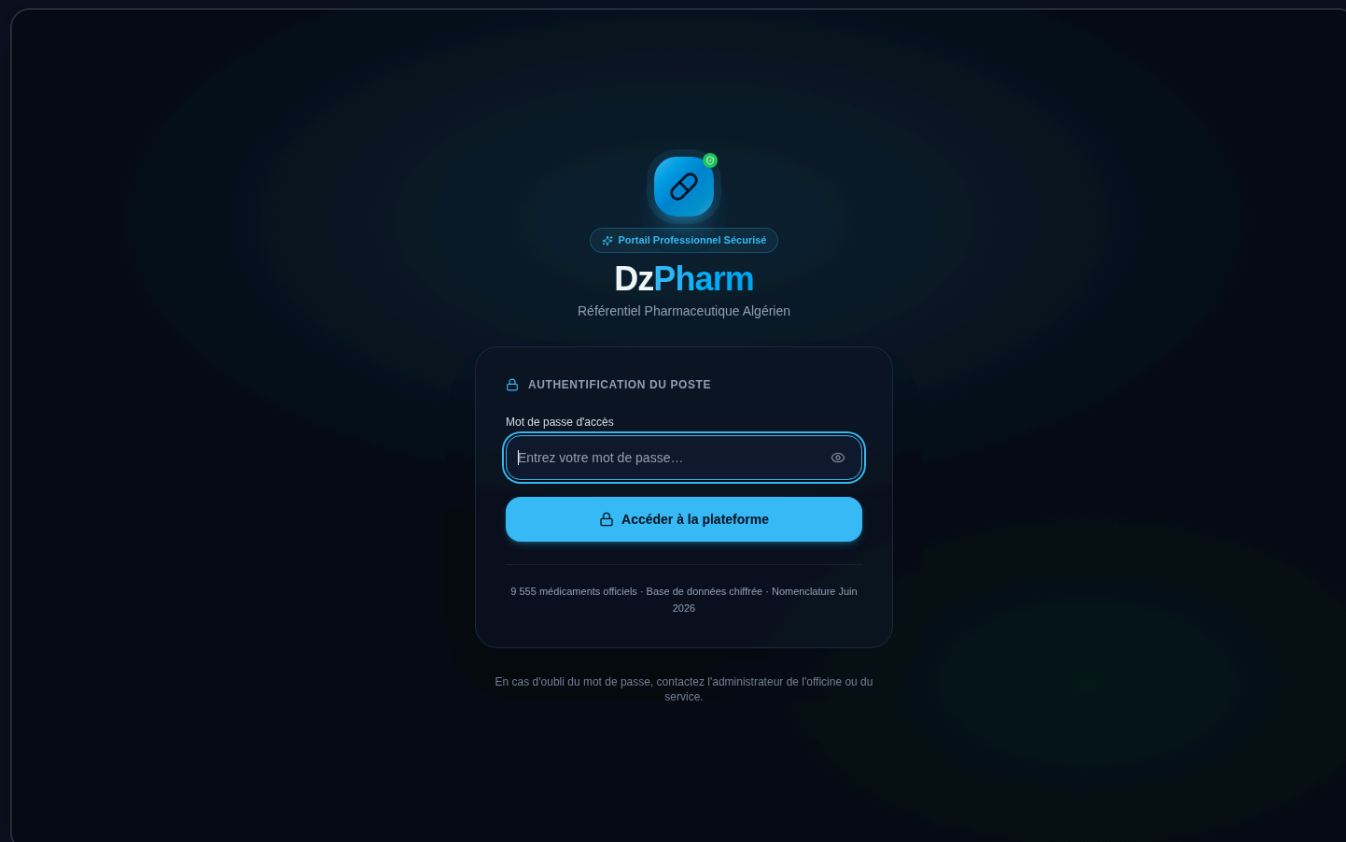


Figure 46.3 — Navigating to `/nonexistent-page` redirects to `/login?redirectTo=%2Fnonexistent-page` (auth redirect). After login, the 404 page appears — the raw Next.js default with the `«next-error-h1»` class, no DzPharm branding, no nav, no search box. The user is stranded.

Gap: 404 page is the raw Next.js default — no branding, no recovery

The 404 page is the unbranded Next.js default error page with the `next-error-h1` class. No DzPharm header, no navigation, no search box, no "return to dashboard" link. A user who lands on a 404 (via typo, broken link, or the routing bug from #1) is stranded — they must manually edit the URL. This was already documented in the #1 Routing Architecture report. Fix: create a custom `app/not-found.tsx` with DzPharm branding, a search box, and nav links (code snippet provided in #1 report).

END OF FEATURE 46 · NEXT

47

Form Validation

— CHAPTER 04 · FEATURE #47

Form Validation · Disabled-Until-Valid Pattern

Form validation uses the **disabled-until-valid pattern**: the submit button is disabled until the form has the minimum required inputs. This is combined with free-text patient context fields

that accept any input. The pattern is correct but the quick-example buttons don't auto-populate the drug list (already documented in #22 Interactions report).

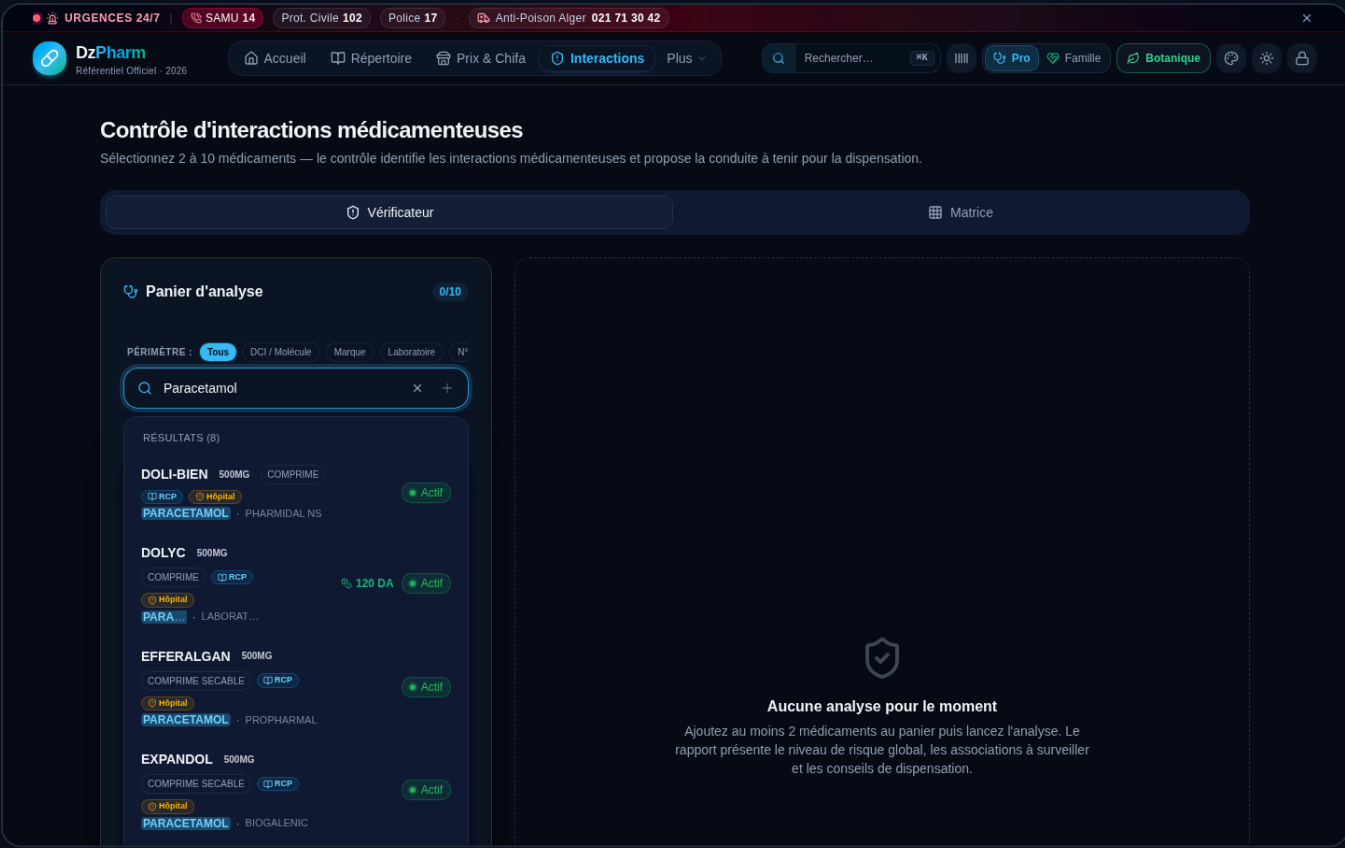


Figure 47.1 – Interactions checker with the «Analyser les interactions» button disabled. The button uses `disabled:pointer-events-none disabled:opacity-50` – visible but non-interactive. The combobox for adding drugs and the patient context textarea are visible. Five quick-example buttons are below.

4.1 The Disabled-Until-Valid Pattern

FORM STATE	BUTTON STATUS	VERDICT
No drugs added	Disabled (pointer-events: none, opacity: 0.5)	CORRECT
1+ drugs added via combobox	Still disabled (needs Enter to confirm?)	VERIFY
Quick-example button clicked	Still disabled (example buttons don't populate)	BUG (#22)
Patient context field	Accepts any text (no validation)	CORRECT (FREE TEXT)

4.2 The Disabled Button Styling

```
/* Computed style of the disabled Analyser button */
button[disabled] {
  pointer-events: none;      /* no hover/click */
  opacity: 0.5;             /* 50% visual fade */
  /* Keep the button visible – don't hide it */
}
```

This is the correct pattern for disabled buttons: visible but non-interactive. Hiding the button entirely would confuse users who don't know what action to take. The 50% opacity communicates "this action exists but isn't available yet" without removing it from the visual hierarchy.

4.3 The Patient Context Field

The patient context textarea (`aria-label="Contexte patient – âge, pathologies, grossesse..."`) accepts any text. Tested with "Patient 65 ans, diabétique" — the field accepted it without validation. This is correct: the context field is free-text guidance for the AI analysis, not a structured input that needs format validation. The Copilot uses this context when analyzing interactions.

4.4 Login Form HTML5 Constraints

From the #7 Login Flow report, the login input has:

PROPERTY	VALUE	VERDICT
type	"password"	CORRECT
required	false (no HTML5 required)	MISSING
minLength / maxLength	-1 / -1 (not set)	MISSING
autocomplete	"current-password"	CORRECT
form method	"get" (not "post")	SHOULD BE POST
Client-side validation	JS-based (role=alert + aria-invalid)	WORKING
Server-side validation	POST /api/auth → 401/200	WORKING

Gap: Login form uses method="get" instead of "post"

The login form's `method` attribute is `"get"` instead of `"post"` . If the form were to submit natively (without JS interception), the password would appear in the URL query string. The JS handler intercepts the submit, so the form method is technically irrelevant — but it's a bad default that could expose the password if JS fails. Recommend changing to `method="post"` .

Summary & Assessment

role=dialog
MODAL ARIA

role=alert
ERROR FEEDBACK

disabled → enabled
VALIDATION PATTERN

5
GAPS FOUND

THE BOTTOM LINE

The UX layer trio is **functional and mostly accessible**. The Modal Dialog System uses Radix UI with correct `role="dialog"`, `aria-labelledby`, focus trap, and Escape handling. Error States use `role="alert"` `aria-live="assertive"` with `aria-invalid` and red border. Form Validation uses the disabled-until-valid pattern. The 5 gaps are: (1) missing `aria-modal`, (2) English "Close" aria-label, (3) no backdrop click-to-close, (4) raw Next.js 404 page, (5) `method="get"` on login form. All are quick fixes — total effort ~3 hours.

Immediate Next Steps · 3 Hours Total

1. Add `aria-modal="true"` to the Radix Dialog component (15 min).
2. Change close button `aria-label` from "Close" to "Fermer" (5 min).
3. Enable backdrop click-to-close via Radix `onInteractOutside` (30 min).
4. Create custom `app/not-found.tsx` with DzPharm branding (already specified in #1 report) (1 hour).
5. Change login form `method="get"` to `method="post"` (5 min).
6. Differentiate empty-submit error ("Veuillez saisir...") from wrong-code error ("Mot de passe incorrect") (30 min).
7. Add HTML5 `required` attribute to the password input (5 min).

42·46·47

Radix modal with ARIA. role=alert errors. Disabled-until-valid pattern. 5 gaps, 3 hours to fix all.

5

CHAPTERS

5

SCREENSHOTS

3

FEATURES AUDITED

5

GAPS FOUND