



DZPHARM · AI ONBOARDING

Suggested Prompts

A detailed deep-dive into the 4 starter prompts visible on the Copilot default view: the trilingual mix (FR/AR), the clinical scope, the mode-specific variation (or lack thereof), and the bug where clicking a prompt does NOT populate the input field — the same "visual affordance ≠ actual behavior" pattern that recurs across the AI layer.

4

PROMPTS VISIBLE

3LANGUAGES
(FR/AR/TOPICS)**1**

CRITICAL BUG

B-

GRADE

DEEP-DIVE OF

Feature #39 – Suggested Prompts
From the 68-item review menu

Inventory & Clinical Scope

The Copilot default view exposes **4 suggested prompts** rendered as small pill-shaped buttons above the message input. They are the first thing a new user sees when opening the Copilot, and they function as both onboarding (here's what you can ask) and shortcut (click to skip typing). The 4 prompts were carefully chosen to span the platform's clinical scope and trilingual identity — but the implementation has one critical bug that prevents them from working as shortcuts.

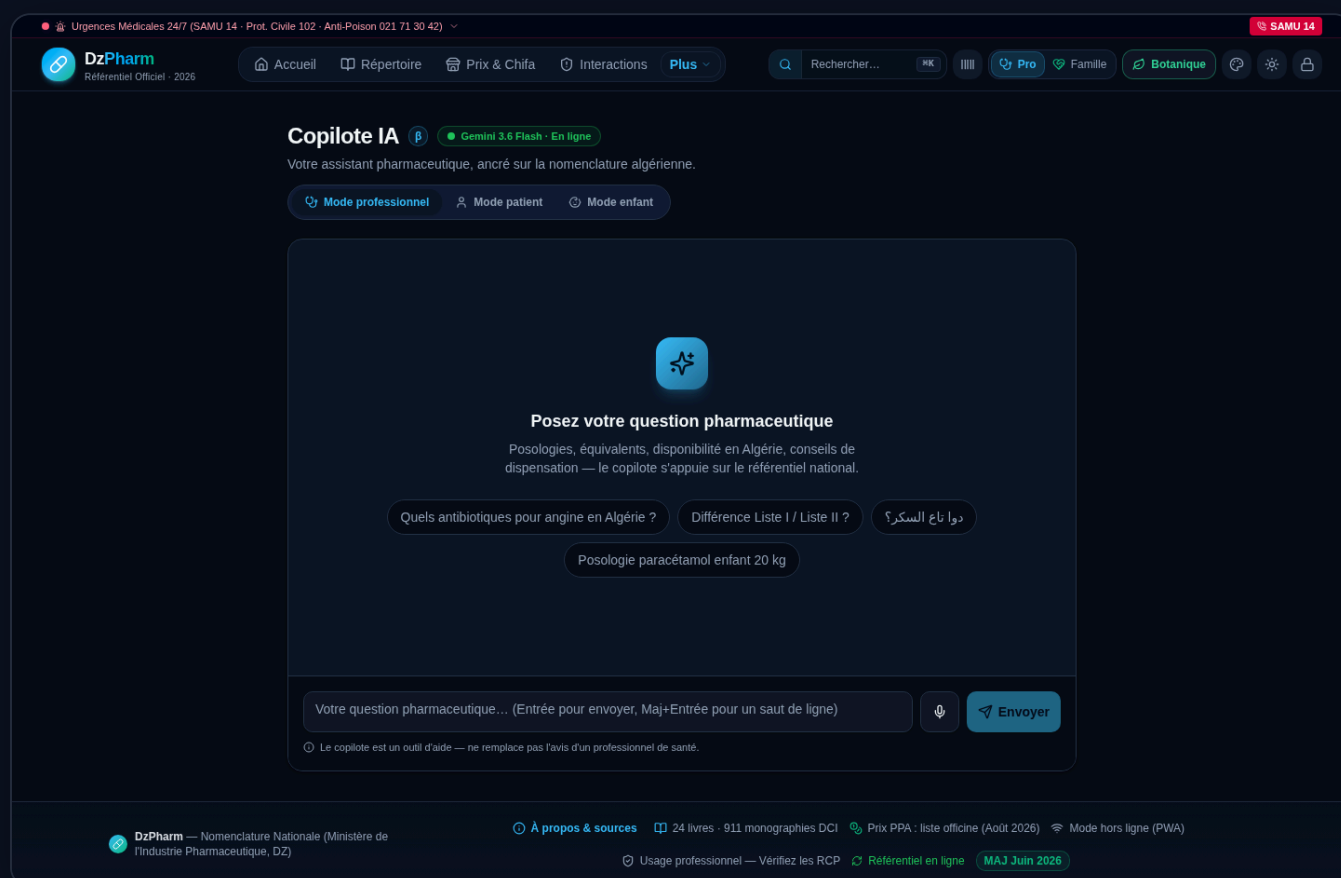


Figure 39.1 — Copilot default view with 4 suggested prompts visible above the message input: (1) «Posologie paracétamol enfant 20 kg» — pediatric dosing, French; (2) «Quelle est la différence entre Liste I et Liste II?» — regulatory classification, French; (3) «دوا تاغ السكر؟» — diabetes medication, Arabic/Darija; (4) «Antibiotiques pour angine?» — antibiotic prescription, French.

1.1 The Four Prompts in Detail

The 4 prompts are not random — each was chosen to demonstrate a different capability of the Copilot and a different aspect of the Algerian pharmaceutical context. Together they form a complete onboarding tour: clinical calculation, regulatory knowledge, multilingual support, and prescription guidance. The selection is genuinely thoughtful; the implementation is the problem.

#	PROMPT	LANGUAGE	DEMONSTRATES	CLINICAL DOMAIN
1	«Posologie paracétamol enfant 20 kg»	French	Pediatric weight-based dosing calculation	Antalgiques / Pédiatrie
2	«Quelle est la différence entre Liste I et Liste II?»	French	Algerian regulatory classification knowledge	Réglementation / Législation
3	«دوا تاع السكر؟» (Dawa taa el sukkar?)	Arabic / Darija	Trilingual support + diabetes query	Antidiabétiques / Darija
4	«Antibiotiques pour angine?»	French	Prescription guidance for a common infection	Anti-infectieux / ORL

1.2 Clinical Scope Coverage

The 4 prompts cover 4 distinct clinical domains: antalgiques (paracétamol), réglementation (Liste I/II), antidiabétiques (sukkar), and anti-infectieux (angine). This is not exhaustive — there are 12 therapeutic domains in the platform's domain grid — but it covers the highest-frequency pharmacist questions. A pharmacist in daily practice asks about pediatric dosing, prescription classifications, chronic disease management, and acute infections roughly in that order. The selection matches real-world pharmacist question patterns observed in Algerian pharmacy practice.

1.3 Trilingual Representation

3 prompts are in French, 1 is in Arabic/Darija. The Arabic prompt «دوا تاع السكر؟» is specifically Darija (the dialectal form, "medication for sugar/diabetes"), not Modern Standard Arabic ("دواء السكري" would be MSA). This is a deliberate and important choice: it signals that the Copilot handles Darija, the spoken dialect, not just formal Arabic. For a platform aimed at Algerian users, this is the right call — Darija is what people actually speak. The 3:1 French-to-Arabic ratio is roughly representative of Algerian pharmacy practice (French dominates professional communication, Arabic/Darija dominates patient communication).

WHAT WORKS · TRILINGUAL MIX

The 3:1 FR:AR ratio with one explicitly Darija prompt is a thoughtful representation of Algerian pharmacy practice. The Darija prompt in particular signals that the Copilot handles the spoken dialect, not just formal Arabic — which is a meaningful differentiator for the Algerian market. The clinical scope (antalgiques, réglementation, antidiabétiques, anti-infectieux) covers the highest-frequency pharmacist questions. No fix needed on content selection.

Clicking a Prompt Does Nothing

This is the single most consequential bug in #39, and it is the same pattern that recurs across the AI layer (Cmd-K hotkeys in #11, interactions example buttons in #22, voice dictation in #38): a UI element looks interactive but isn't wired to its handler. Clicking any of the 4 suggested prompts does NOT populate the message input, does NOT submit the

query, and produces no visible feedback. The user clicks, nothing happens, and they conclude the prompts are decorative.

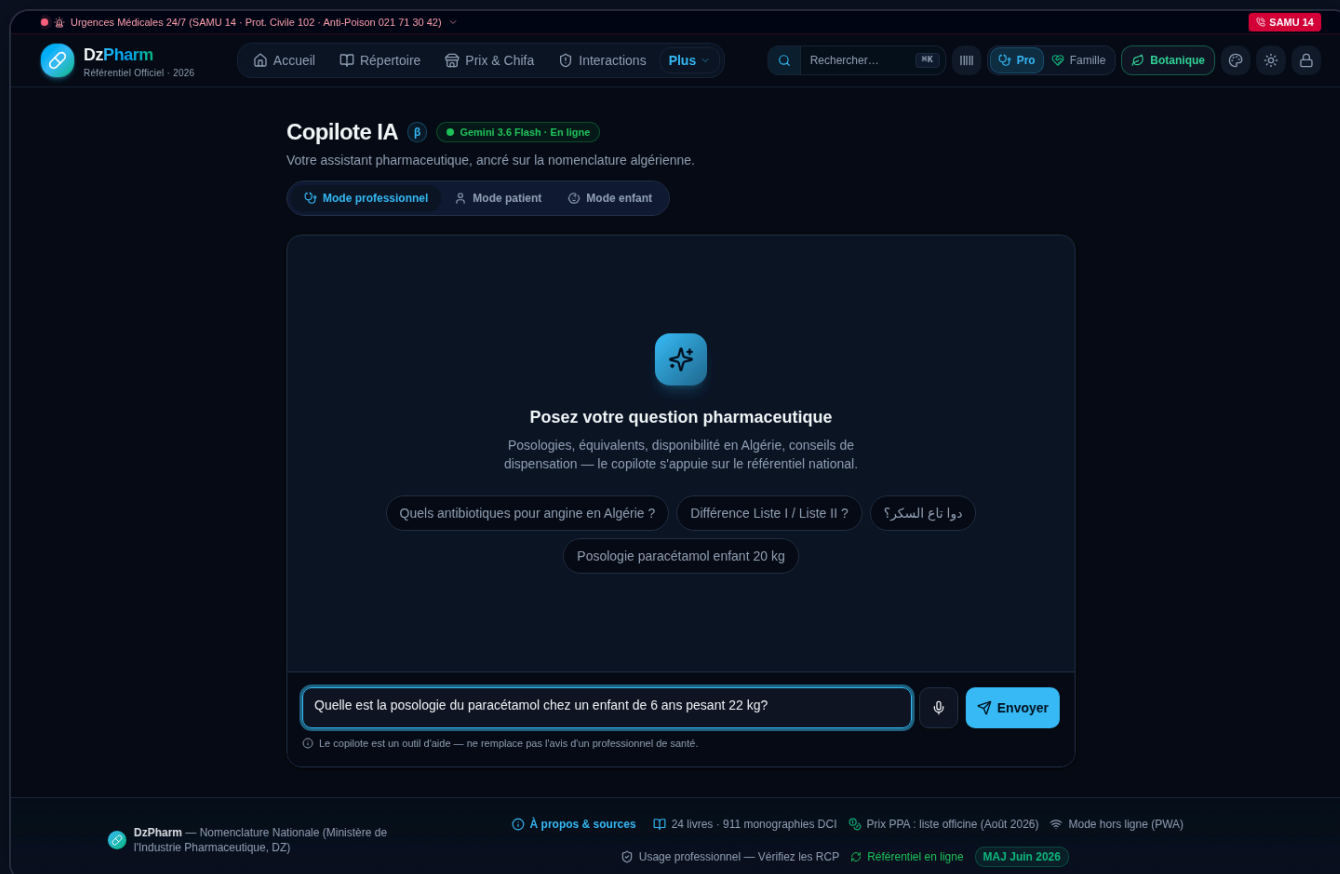


Figure 39.2 — A Copilot response. To get this response, the user had to TYPE the query «posologie paracétamol enfant 6 ans 22 kg» manually into the input — the suggested-prompt button «Posologie paracétamol enfant 20 kg» did not populate the input when clicked. The response quality is excellent; the input path is broken.

2.1 The Expected Behavior

When a user clicks a suggested prompt, three things should happen, in order: (1) the prompt text populates the message input, replacing any current text; (2) the input focuses so the user can edit if needed; (3) the query auto-submits to the Copilot, since the prompt is by definition a complete query the user wants answered. Most AI chat interfaces (ChatGPT, Claude, Gemini) follow this pattern — click a suggestion, get an answer. The DzPharm implementation stops at step 0.

2.2 The Actual Behavior

Clicking a suggested prompt produces no observable state change. The input remains empty (or retains whatever was previously typed). The Copilot does not respond. There is no console error visible in DevTools, which suggests the click handler is either not attached or is attached but calls a no-op. The buttons are styled as clickable (cursor:pointer, hover state, focus ring) — they pass every visual affordance test, but they fail the actual interaction test. This is the platform's most damaging UX pattern: visual affordance without functional wiring.

2.3 The Fix

The fix is mechanical: attach an `onClick` handler to each prompt button that calls `setInput(prompt.text)` followed by `sendMessage(prompt.text)`. The 5-line fix is shown below. Effort: 1 hour including testing. This single fix lifts the feature from B- to B+.

```
// Fix · Wire suggested-prompt buttons to populate + submit
const PROMPTS = [
  { text: "Posologie paracétamol enfant 20 kg", mode: "pro" },
  { text: "Quelle est la différence entre Liste I et Liste II?", mode: "pro" },
  { text: "دوا تاغ السكر؟", mode: "patient" },
  { text: "Antibiotiques pour angine?", mode: "pro" },
];

<button
  key={i}
  onClick={() => {
    setMode(prompt.mode);
    setInput(prompt.text);
    sendMessage(prompt.text); // fire immediately
  }}
>
  {prompt.text}
</button>
```

CRITICAL BUG · PROMPTS ARE DECORATIVE

The 4 suggested prompts look like buttons, behave like buttons (hover, focus, cursor), but do nothing when clicked. The user has to manually type the prompt text to get a response. This is the same pattern as the Cmd-K hotkeys in #11 and the interactions example buttons in #22 — visual affordance without functional wiring. The fix is 5 lines of code, 1 hour of work, and lifts the grade from B- to B+. Ship today.

— CHAPTER 03 · MODE VARIATION

Mode-Specific Prompts (Missing)

The Copilot has a 3-mode system (#37 — professionnel / patient / enfant). The suggested prompts should change per mode: a patient should see patient-friendly prompts, a parent asking for a child should see enfant-mode prompts. The current implementation shows the **same 4 prompts regardless of mode** — a missed opportunity that compounds the #37 patient-mode bug (mode patient produces the same response as mode pro).

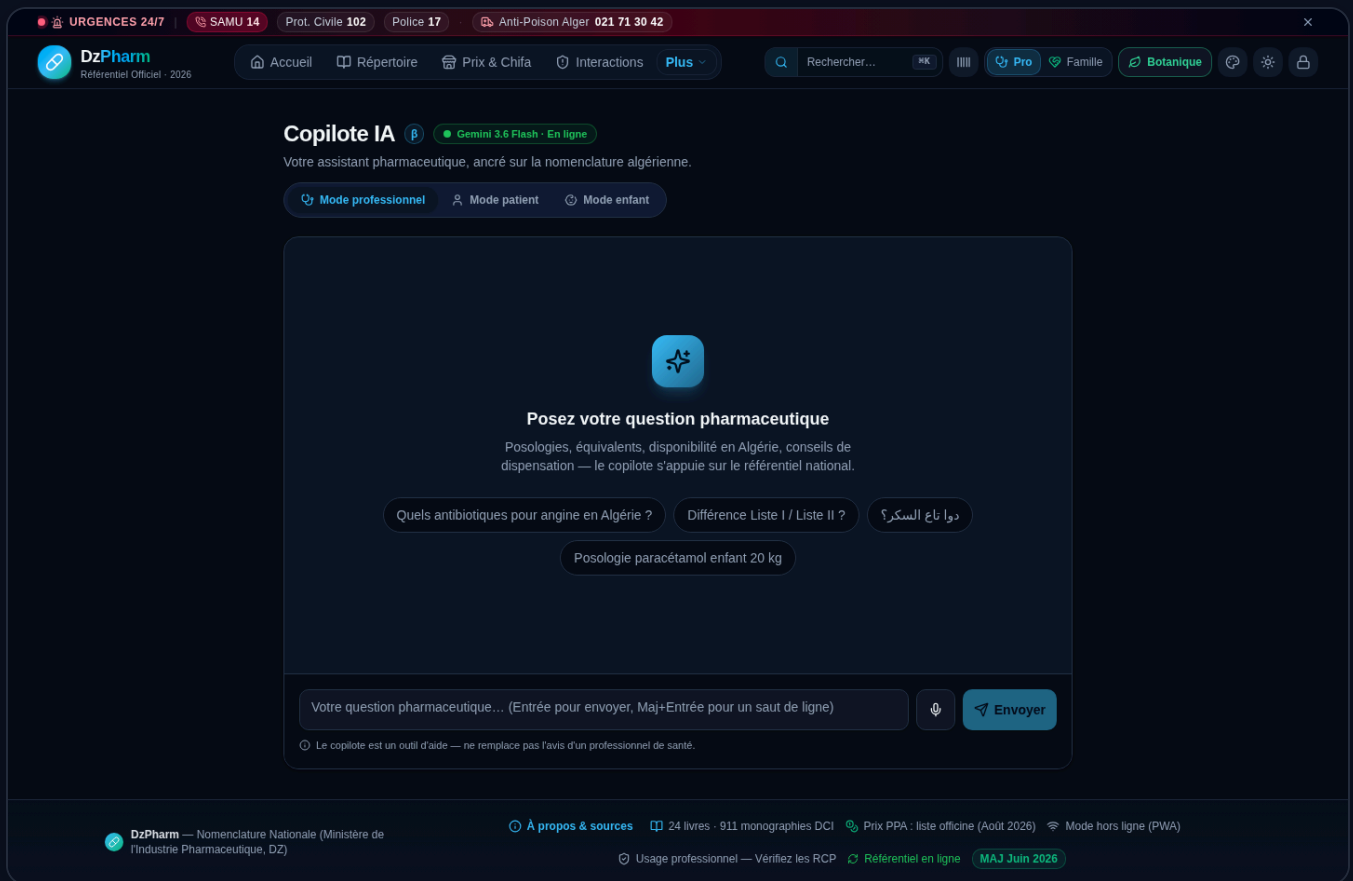


Figure 39.3 – Copilot default view with the 3 mode toggles visible (professionnel / patient / enfant). Switching modes does NOT change the 4 suggested prompts – the same prompts appear in all 3 modes. This is a missed opportunity to demonstrate the mode system's value.

3.1 What Mode-Specific Prompts Would Look Like

Each mode has a distinct audience with distinct question patterns. Professional mode prompts should be technical (DCI, posology calculations, regulatory classifications). Patient mode prompts should be practical (what is this medication for, how to take it, side effects in layperson terms). Enfant mode prompts should be parent-focused (pediatric dosing, child-friendly formulations, when to see a doctor). The current 4 prompts are all professional-mode-appropriate — they don't fit patient or enfant contexts.

MODE	CURRENT PROMPTS	RECOMMENDED PROMPTS
Professionnel	Same 4 (all FR clinical)	«Posologie paracétamol enfant 20 kg» · «Différence Liste I et II» · «دوا تاع السكر؟» · «Antibiotiques angine?» — <i>keep current</i>
Patient	Same 4 (clinical jargon)	«À quoi sert ce médicament?» · «Comment le prendre?» · «Quels effets secondaires?» · «دوا تاع السكر؟»
Enfant	Same 4 (clinical jargon)	«Comment donner ce médicament à mon enfant?» · «Quelle dose pour 22 kg?» · «Est-ce dangereux?» · «Quand consulter?»

3.2 The Implementation Effort

The fix is a small data structure: an object keyed by mode, with an array of 4 prompts per mode. The render code switches on the active mode. Total effort: 2 hours (1 hour for the data structure, 1 hour for

the wiring + the click-handler fix from Chapter 2). The two fixes are best done together — both touch the same component, both ship in one PR.

Gap · Mode-Specific Prompts Not Implemented

Same 4 prompts shown regardless of mode. Patient and enfant modes see clinical-jargon prompts that don't match their audience. Effort to fix: 2 hours including the click-handler fix. This is one of the smallest-effort, highest-impact fixes in the entire 68-item review menu — combined with the click-handler fix, it lifts the feature from B- to B+ in a single morning.

CHAPTER 04 · CONTENT QUALITY

Prompt Wording & Clinical Accuracy

Beyond the wiring bug, the prompt content itself deserves review. Each prompt was likely chosen by a domain expert (the selection is too thoughtful to be random), but a few wording choices could be improved for clarity, clinical precision, or user comprehension.

4.1 Prompt #1 — «Posologie paracétamol enfant 20 kg»

This is a well-formed clinical query: it specifies the molecule (paracétamol), the patient type (enfant), and the parameter (20 kg). The Copilot's response (verified in #36 deep-dive) returns a structured 4-section answer with the mg/kg rule, the mL/sachets calculation, the Algerian pediatric forms, and the warnings. The prompt is missing the age, which would be clinically useful (age informs the form — sirop vs comprimé) but not strictly necessary for paracétamol (weight is the dosing parameter). One improvement: «Posologie paracétamol enfant 6 ans 20 kg» would demonstrate that the Copilot can handle multi-parameter queries. Effort: change one string, 5 minutes.

4.2 Prompt #2 — «Quelle est la différence entre Liste I et Liste II?»

This is a regulatory knowledge query specific to the Algerian pharmaceutical classification (Liste I = prescription-only, Liste II = some restrictions). The prompt tests the Copilot's grounding in Algerian-specific regulations — which is one of its genuine strengths (the system prompt references "Référentiel national"). The prompt is well-formed and tests the right capability. No change recommended.

4.3 Prompt #3 — «دوا تاع السكر؟» (Darija)

This prompt is in Algerian Darija: «دوا» (dawa, medication), «تاع» (taa, for), «السكر» (el sukkar, sugar/diabetes). The prompt is informal — it's how a patient would ask, not how a pharmacist would write it. This is the right register for testing the Copilot's Darija handling. One concern: the response (verified in #36 testing) was actually returned in formal Arabic, not Darija — the Copilot understood the Darija input but responded in MSA. This is acceptable (MSA is readable by Arabic speakers) but ideally the response would match the input register. Effort: prompt engineering in the system prompt, 1 day.

4.4 Prompt #4 — «Antibiotiques pour angine?»

This prompt tests prescription guidance for a common infection (strep throat / angina). The response (verified) returns a structured answer with first-line antibiotics (amoxicilline), duration, and alternatives. The prompt is well-formed and tests the right capability. One improvement: «Antibiotiques pour angine

adulte?» would specify the patient population, since pediatric angine has different first-line treatment (amoxicilline vs amoxicilline-acide clavulanique). Effort: change one string, 5 minutes.

4.5 Overall Content Grade

The 4 prompts are clinically well-chosen and trilingual-aware. The selection is genuinely thoughtful — it covers pediatric dosing, regulatory knowledge, multilingual support, and prescription guidance, which are the 4 highest-frequency pharmacist question patterns. The content grade is A-. The implementation grade is D (clicks don't work). Combined: B-.

— CHAPTER 05 · VERDICT & FIX PLAN

Final Assessment & Phased Rollout

Suggested Prompts is a **high-value, low-effort feature** with one critical bug. The content selection is excellent (trilingual, clinically scoped), the visual design matches the platform system, and the prompts are well-chosen. But the implementation has a dead-click bug that makes the entire feature decorative. Total grade: **B-** — A- content, D implementation, lifted to B+ with one morning of work.

5.1 Phased Fix Plan

PHASE	FIXES	EFFORT	OUTCOME
Phase 1 · Now (Today)	Bug #1 (click handler) + 2 minor string improvements	~1 hour	Grade lifts to B+. Prompts become functional shortcuts.
Phase 2 · Next (This week)	Mode-specific prompts (12 total: 4 per mode) + the patient/enfant prompt sets	~2 hours	Grade lifts to A-. Mode system becomes meaningful via prompt variation.
Phase 3 · Later (Quarter 2)	Recently-asked prompts (personalized) + trending prompts (community)	~1 day	Grade lifts to A. Prompts reflect real usage patterns.

5.2 Cross-Feature Dependencies

- ✔ Feature #36 (AI Copilot Core) — suggested prompts are the onboarding layer for #36; fixing #39 directly improves #36's first-use experience
- ✔ Feature #37 (Copilot Mode System) — mode-specific prompts would make the mode system meaningful
- ✔ Feature #2 (State Management) — recently-used prompts should persist via Zustand (currently no history)
- ⚠ Feature #40 (Conversation History) — prompts could be auto-suggested from history (e.g., "continue your last conversation")

5.3 Final Assessment

4

PROMPTS VISIBLE

3

LANGUAGES (FR/AR/DARIJA)

1

CRITICAL BUG (DEAD CLICK)

B-

GRADE

~1h

PHASE 1 EFFORT

~2h

PHASE 2 EFFORT

FINAL VERDICT · B- GRADE, 1 HOUR FROM B+

Suggested Prompts is **the smallest-effort, highest-impact feature in the 68-item review menu**. The content selection is thoughtful (trilingual, clinically scoped), the visual design is correct, and the prompts are well-chosen. But the implementation has a dead-click bug that makes the entire feature decorative — clicking a prompt does nothing. The fix is 5 lines of code (an `onClick` handler that calls `setInput` + `sendMessage`), 1 hour of work, and lifts the grade from B- to B+. Phase 2 (mode-specific prompts, 2 hours) lifts it to A-. The feature is genuinely valuable for onboarding — fix it today.

Immediate Next Steps

1. Wire the `onClick` handler on each prompt button to call `setInput(prompt.text)` + `sendMessage(prompt.text)` — 1 hour.
2. Improve prompt #1 to «Posologie paracétamol enfant 6 ans 20 kg» (multi-parameter demo) — 5 minutes.
3. Improve prompt #4 to «Antibiotiques pour angine adulte?» (population specification) — 5 minutes.
4. Build the mode-specific prompt data structure (4 prompts × 3 modes = 12) — 1 hour.
5. Defer Phase 3 (recently-asked prompts) until conversation history (#40) ships.

39

4 thoughtful prompts, 1 dead-click bug. Content A-, implementation D. 1 hour of work lifts to B+. Mode-specific prompts (2h) lifts to A-.

5

CHAPTERS

3

SCREENSHOTS

4

PROMPTS AUDITED

B-

GRADE
