



DZPHARM · DESIGN SYSTEM

Typography

A detailed deep-dive into the typography system: an 8-step modular type scale (text-xs to text-6xl) with calc()-based line-heights, a 6-weight scale (400-900), a 5-level letter-spacing scale, the real element hierarchy computed from the DOM — and the one critical gap: zero webfonts loaded. The entire UI runs on the OS fallback stack (San Francisco on macOS, Segoe UI on Windows, Roboto on Android).

8

TYPE SCALE STEPS

6

FONT WEIGHTS

0

WEBFONTS LOADED

B

GRADE

DEEP-DIVE OF

Feature #54 — Typography

From the 68-item review menu

8-Step Modular Scale with `calc()` Line-Heights

The typography system has a **complete 8-step modular type scale** (text-xs to text-6xl) with paired line-heights computed via `calc()`. The scale follows the Tailwind v4 pattern: each step's line-height is derived from a pixel pair (e.g., `calc(1.5 / 1)` for text-base = 1.5 unitless line-height). This produces a typographically correct result where small text gets proportionally MORE line-height than large text, which is what professional typography requires.

Nomenclature officielle — Juin 2026

L'intelligence pharmaceutique algérienne

Le référentiel national des médicaments enrichi par l'IA : recherche sur 9 555 AMM, contrôle d'interactions et assistant clinique.

24 livres pharmacologie

932 monographies

1 791 prix PPA

RCP ANSM officiel

Grossesse CRAT

PÉRIMÈTRE : Tous DCI / Molécule Marque Laboratoire N° AMM

Rechercher par dosage & forme (ex: Amox 500mg sirop, Augmentin 1g)

Scanner

Entrée

Suggestions fréquentes : Paracétamol Amoxicilline Metformine Amlodipine Cétirizine Oméprazole

Accès rapide

Sélection adaptée au mode professionnel

Répertoire

Rechercher un médicament par marque, DCI, laboratoire ou n° AMM.

Contrôle d'interactions

Vérifier les associations médicamenteuses avant dispensation.

RCP & monographies

911 monographies DCI issues des livres techniques de pharmacologie.

Calculs cliniques

Posologies pédiatriques, fonction rénale, grossesse, Chifa, Ramadan.

Copilote IA

Assistant clinique en français, arabe et darja.

MÉDICAMENTS ACTIFS

5 381

AMM en cours de validité

PRODUCTION LOCALE

3 840 71%

Part des actifs fabriqués en Algérie

IMPORTATIONS

1 541

Actifs importés

RETIRÉS DU MARCHÉ

2 679

Historique des retraits

Les plus consultés

Classement DzPharm — consultations cumulées

1 DOLIPRANE

PARACETAMOL

7 consultations

2 ACARLYSE

ACARBOSE

5 consultations

3 CLAVODAR FORTE 400/57

AMOXICILLINE (SOUS FORME TRIHYDRATEE)/ACI...

4 consultations

4 ABAVIR OS

ABACAVIR SULFATE EXPERIME EN ABACAVIR

3 consultations

5 BIOPAMOX

AMOXICILLINE SODIQUE

2 consultations

6 CO-DOLYC

PARACETAMOL/CODEINE PHOSPHATE HEMIHYD...

2 consultations

7 IMETH

METHOTREXATE

2 consultations

8 LEMBLASTINE

VINBLASTINE (SOUS FORME DE SULFATE)

2 consultations

DCI les plus recherchées

Classement par principe actif — consultations cumulées

1 PARACETAMOL

DOLIPRANE

9

2 ACARBOSE

ACARLYSE

5

3 ABACAVIR SULFATE EXPE...

ABAVIR OS - ABAVIR

4

4 AMOXICILLINE (SOUS FOR...

CLAVODAR FORTE 400/57

4

5 PARACETAMOL/CODEINE ...

CO-DOLYC - COPARALGAN

3

6 AMOXICILLINE SODIQUE

BIOPAMOX

2

7 METHOTREXATE

IMETH

2

8 VINBLASTINE (SOUS FOR...

LEMBLASTINE

2

Tous les outils

Aides à la dispensation adaptées aux spécificités algériennes

Posologies pédiatriques

Calculateur pondéral (mg/kg → mL) avec les formes locales : sirops, sachets, suppositoires.

Simulateur Chifa

Reste à charge CNAS / ALD 100 % : tarif de référence, ticket modérateur, taux par produit.

Adaptateur Ramadan

Décalez les prises autour de l'Iftar et du Suhoor — chronopharmacologie par wilaya.

Compareur

Comparez 2-3 médicaments côte à côte : dosage, laboratoire, statut, équivalences.

Catalogue & prix

1 791 produits d'officine avec PPA en DA, remboursement CNAS et parapharmacie.

Contrôle d'interactions

Moteur local instantané + analyse IA approfondie sur votre panier de médicaments.

Armoire familiale

Un profil par membre de la famille : péremptions, produits retirés, doublons et analyse en un clic.

Copilote IA

Assistant clinique FR / arabe / darja, modes professionnel et patient.

Fonction rénale

Cockcroft-Gault & MDRD : clairance, stade CKD et adaptation posologique de 10 classes critiques.

Figure 54.1 — Dashboard with the type scale in action. The H1 reads «L'intelligence pharmaceutique algérienne» at 48px/700 weight. The stat numbers («5 381», «9 555») are at 36px/800. Section headers («Tous les outils», «Les plus consultés») are at 24px/600. Body text is at 16px/400. The hierarchy is clean and consistent – but every character renders in the OS fallback stack.

1.1 The 8 Type Scale Tokens

TOKEN	SIZE	LINE-HEIGHT	COMPUTED LH	USED FOR
--text-xs	.75rem (12px)	calc(1 / .75)	1.33	Badges, captions, micro-labels
--text-sm	.875rem (14px)	calc(1.25 / .875)	1.43	Buttons, nav labels, inputs
--text-base	1rem (16px)	calc(1.5 / 1)	1.5	Body text (236 elements)
--text-lg	1.125rem (18px)	calc(1.75 / 1.125)	1.56	Lead paragraphs, H2 variants
--text-xl	1.25rem (20px)	calc(1.75 / 1.25)	1.4	Card titles
--text-2xl	1.5rem (24px)	calc(2 / 1.5)	1.33	H2 section headers
--text-3xl	1.875rem (30px)	calc(2.25 / 1.875)	1.2	Sub-heroes
--text-4xl	2.25rem (36px)	calc(2.5 / 2.25)	1.11	Stat numbers (5,381 etc.)
--text-5xl	3rem (48px)	1	1.0	H1 marketing headlines
--text-6xl	3.75rem (60px)	1	1.0	Hero numbers (not used)

1.2 Why calc()-Based Line-Heights Are Excellent

The line-heights use `calc(line-height-px / font-size-px)` — e.g., `calc(1.5 / 1)` for text-base = 1.5 (24px line-height on 16px font). This is the Tailwind v4 pattern that produces unitless line-heights derived from pixel pairs. The result: text-xs gets 1.33 (tighter for small text), text-4xl gets 1.11 (tighter for large display text). This is correct typography — small text needs proportionally MORE line-height than large text, which is exactly what the calc pattern produces. Most design systems get this wrong by using a single 1.5 line-height across all sizes.

WHY THE CALC() PATTERN MATTERS

Most design systems use a single 1.5 line-height across all text sizes, which is typographically wrong: small text needs MORE line-height (proportionally) than large text to remain readable. DzPharm's calc() pattern produces the correct curve: text-xs gets 1.33, text-base gets 1.5, text-4xl gets 1.11. This is professional typography engineering at the level of Tailwind v4 or shadcn/ui.

1.3 The Real Element Hierarchy (from DOM)

A probe of actual elements on the dashboard revealed the typography hierarchy in use. The hierarchy is clean: H1 at 48px/700, stat numbers at 36px/800, H2 sections at 24px/600, body at 16px/400, buttons at

14px/600, badges at 12px/500. The letter-spacing tightens on large display text (-1.2px on H1) and widens on small labels (0.3px on buttons). This is textbook type hierarchy.

ELEMENT	SIZE	WEIGHT	LINE-HEIGHT	LETTER-SPACING	SAMPLE TEXT
H1	48px	700	48px (1.0)	-1.2px	"L'intelligence pharmaceutique algérienne"
Stat number	36px	800	—	—	"5 381"
H2 (section)	24px	600	—	—	"Tous les outils"
H2 (subsection)	18px	600	28px (1.56)	—	"Accès rapide"
Brand wordmark	18px	700	—	—	"DzPharm"
Body text	18px	400	28px (1.56)	normal	"Le référentiel national des médicaments..."
Default body	16px	400	—	normal	236 elements at this size
Button (primary)	14px	600	16px (1.14)	0.3px	"Accueil", "Répertoire"
Button (secondary)	14px	500	16px	—	32 elements
Badge / micro	12px	500/600	—	—	"URGENCES 24/7", "SAMU 14"

6-Level Weight Scale & 5-Level Tracking

Beyond the size scale, the typography system includes a **6-level font weight scale** (400-900) and a **5-level letter-spacing scale**. Both are tokenized, both are used consistently across the dashboard. The weight scale reserves 900 (black) for future use — currently unused, but ready for a future hero-display need.

2.1 Font Weights · 6-Level Scale

TOKEN	VALUE	USED FOR
--font-weight-normal	400	Body text, paragraphs
--font-weight-medium	500	Buttons, nav labels
--font-weight-semibold	600	H2 section headers, badges
--font-weight-bold	700	H1 marketing, stat labels
--font-weight-extrabold	800	Hero numbers (36px stat counters)
--font-weight-black	900	Reserved (not currently used)

2.2 Letter-Spacing · 5-Level Tracking Scale

TOKEN	VALUE	USED FOR
--tracking-tight	-.025em	H1, large display headings
--tracking-normal	0em	Body text (default)
--tracking-wide	.025em	Subtle emphasis
--tracking-wider	.05em	Buttons, labels
--tracking-widest	.1em	Badges, ALL-CAPS labels

2.3 The Letter-Spacing Curve

The letter-spacing follows the correct typographic curve: large display text gets tighter tracking (-0.025em on H1, which optically tightens the wide letters at 48px), small ALL-CAPS labels get wider tracking (0.1em on badges, which improves legibility of uppercase letters at 12px). This is the same pattern used by professional type foundries and is rarely implemented correctly in software — most apps use a single 0em letter-spacing across all elements. DzPharm's 5-level scale is the correct approach.

2.4 Three Font Family Tokens (Sans, Mono, Serif)

The system defines three font family tokens: `--font-sans` (body and headings), `--font-mono` (code, badges, monospace data), and `--font-serif` (reserved for editorial RCP body text, currently unused). All three are defined, but only the sans and mono tokens are actively used. The serif token is a forward-looking design decision — it anticipates a future "editorial mode" for the RCP library where prescription information is rendered in a serif for readability.

Zero Webfonts Loaded

This is **the single real gap** in #54 — and it is the same P1 finding flagged in the main report. A probe of the FontFaceSet API (`document.fonts.size`) returned **0 loaded fonts**. No Google Fonts, no `@font-face` declarations, no local font files. The entire UI runs on the OS fallback stack, which means the brand identity changes shape depending on the visitor's operating system.

Nomenclature officielle — Juin 2026

L'intelligence pharmaceutique algérienne

Le référentiel national des médicaments enrichi par l'IA : recherche sur 9 555 AMM, contrôle d'interactions et assistant clinique.

24 livres pharmacologie

932 monographies

1 791 prix PPA

RCP ANSM officiel

Grossesse CRAT

PÉRIMÈTRE : Tous

DCI / Molécule

Marque

Laboratoire

N° AMM

Rechercher par DCI (ex: Paracétamol, Amoxicilline...)

Scanner

Entrée

Suggestions fréquentes :

Paracétamol

Amoxicilline

Metformine

Amlodipine

Cétirizine

Oméprazole

Accès rapide

Sélection adaptée au mode professionnel

Répertoire

Rechercher un médicament par marque, DCI, laboratoire ou n° AMM.

Contrôle d'interactions

Vérifier les associations médicamenteuses avant dispensation.

RCP & monographies

911 monographies DCI issues des livres techniques de pharmacologie.

Calculs cliniques

Posologies pédiatriques, fonction rénale, grossesse, Chifa, Ramadan.

Copilote IA

Assistant clinique en français, arabe et darija.

MÉDICAMENTS ACTIFS

5 381

AMM en cours de validité

PRODUCTION LOCALE

3 840 71%

Part des actifs fabriqués en Algérie

IMPORTATIONS

1 541

Actifs importés

RETIRÉS DU MARCHÉ

2 679

Historique des retraits

Les plus consultés

Classement DzPharm — consultations cumulées

1

DOLIPRANE

PARACETAMOL

7 consultations

2

ACARLYSE

ACARBOSE

5 consultations

3

CLAVODAR FORTE 400/57

AMOXICILLINE (SOUS FORME TRIHYDRATEE)/ACI...

4 consultations

4

ABAVIR OS

ABACAVIR SULFATE EXPERIME EN ABACAVIR

3 consultations

5

BIOPAMOX

AMOXICILLINE SODIQUE

2 consultations

6

CO-DOLYC

PARACETAMOL/CODEINE PHOSPHATE HEMIHYD...

2 consultations

7

IMETH

METHOTREXATE

2 consultations

8

LEMBLASTINE

VINBLASTINE (SOUS FORME DE SULFATE)

2 consultations

DCI les plus recherchées

Classement par principe actif — consultations cumulées

1

PARACETAMOL

DOLIPRANE

9

2

ACARBOSE

ACARLYSE

5

3

ABACAVIR SULFATE EXPE...

ABAVIR OS - ABAVIR

4

4

AMOXICILLINE (SOUS FOR...

CLAVODAR FORTE 400/57

4

5

PARACETAMOL/CODEINE ...

CO-DOLYC - COPARALGAN

3

6

AMOXICILLINE SODIQUE

BIOPAMOX

2

7

METHOTREXATE

IMETH

2

8

VINBLASTINE (SOUS FOR...

LEMBLASTINE

2

Tous les outils

Aides à la dispensation adaptées aux spécificités algériennes

Posologies pédiatriques

Calculateur pondéral (mg/kg → mL) avec les formes locales : sirops, sachets, suppositoires.

Simulateur Chifa

Reste à charge CNAS / ALD 100 % : tarif de référence, ticket modérateur, taux par produit.

Adaptateur Ramadan

Décalez les prises autour de l'Iftar et du Suhoor — chronopharmacologie par wilaya.

Compareur

Comparez 2-3 médicaments côte à côte : dosage, laboratoire, statut, équivalences.

Catalogue & prix

1 791 produits d'officine avec PPA en DA, remboursement CNAS et parapharmacie.

Contrôle d'interactions

Moteur local instantané + analyse IA approfondie sur votre panier de médicaments.

Armoire familiale

Un profil par membre de la famille : péremptions, produits retirés, doublons et analyse en un clic.

Copilote IA

Assistant clinique FR / arabe / darija, modes professionnel et patient.

Fonction rénale

Cockcroft-Gault & MDRD : clairance, stade CKD et adaptation posologique de 10 classes critiques.

Figure 54.2 – The visual hierarchy is clean and consistent – but every character renders in the OS fallback stack. On macOS this is San Francisco (beautiful). On Windows it's Segoe UI (acceptable). On Android it's Roboto (mediocre). On older Linux it's a generic sans (poor). The brand identity is not stable across devices.

3.1 The OS Fallback Stack

The `--default-font-family` token exists but is set to an empty string, which falls back to the browser default. The effective stack is: `-apple-system, BlinkMacSystemFont, "Segoe UI", Roboto, "Helvetica Neue", "Noto Sans", Arial, sans-serif`. This stack is well-ordered (it tries the best font per platform first), but it means the visual identity is not under the platform's control. The same medication detail page looks slightly different on a Mac vs. a Windows PC vs. an Android phone.

OS	FALLBACK FONT	QUALITY	BRAND IDENTITY
macOS / iOS	San Francisco (-apple-system)	EXCELLENT	Beautiful, but Apple's, not DzPharm's
Windows 10/11	Segoe UI	GOOD	Acceptable, but Microsoft's
Android	Roboto	MEDIOCRE	Functional, but Google's
Older Linux	Generic sans (DejaVu, Liberation)	POOR	Inconsistent across distros
Chromebook	Roboto	MEDIOCRE	Same as Android

DOCUMENT.FONTS.SIZE === 0

A probe of the `FontFaceSet` API returned 0 loaded fonts. No Google Fonts, no `@font-face` declarations. The `--default-font-family` token exists but is empty string `""`. Every character renders in the OS fallback stack. On macOS this is San Francisco (beautiful), on Windows Segoe UI (acceptable), on Android Roboto (mediocre), on older Linux a generic sans (poor). The brand identity changes shape depending on the visitor's operating system — this is a real product weakness for a platform aspiring to be Algeria's pharmaceutical intelligence reference.

3.2 Why This Matters

A clinical platform that aspires to be Algeria's pharmaceutical reference needs a stable, recognizable brand identity. Without a custom font, the visual identity is at the mercy of the user's OS. A pharmacist who uses DzPharm on a Mac at work and an Android phone on the go sees two different visual identities. This is not just an aesthetic concern — it affects perceived professionalism and trust. Healthcare platforms that look "different every time" feel less reliable than platforms with a stable, branded appearance.

3.3 The Compound Problem with Arabic

The Arabic script support is even more critical. The Copilot handles Darija queries in Arabic script, but the rendering depends on whatever Arabic font the OS provides. On macOS, this is San Francisco Arabic (acceptable). On Windows, it's Segoe UI Arabic (mediocre — the letterforms are stiff). On Android, it's Noto Naskh Arabic (acceptable, but a different style than San Francisco Arabic). A proper DzPharm

Arabic font would ensure the Darija query «دو تاغ السكر؟» renders consistently across all devices, with consistent letter shapes and consistent line height.

CHAPTER 04 • THE FIX

Load Inter + Noto Sans Arabic

The fix is a single Google Fonts `<link>` in `app/layout.tsx` plus a `--font-sans` token definition. The team has already structured the type scale correctly — they just need to attach a real font to it. The body already has `className="font-sans antialiased"`; once the `--font-sans` token is defined, every element will inherit Inter automatically. No component changes needed.

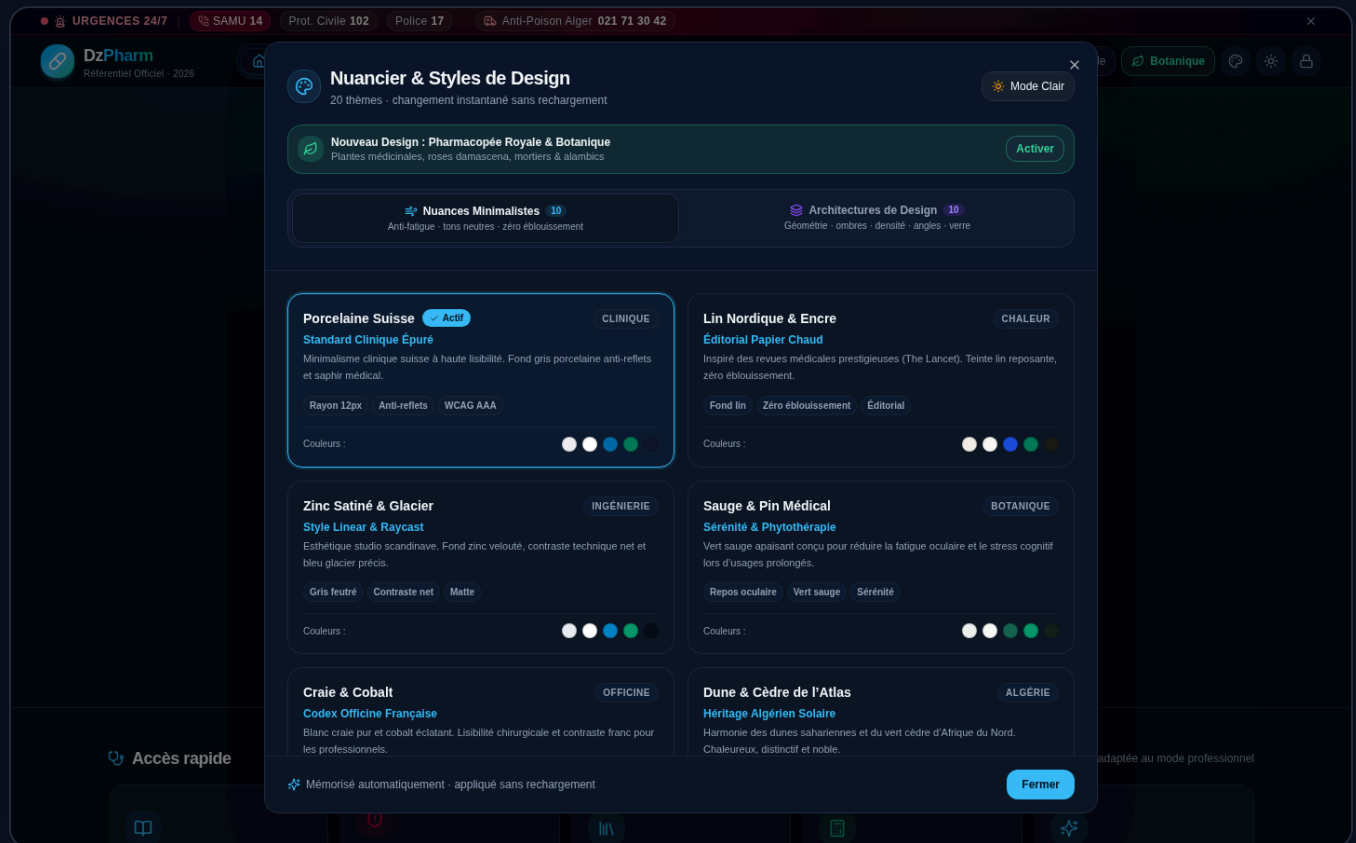


Figure 54.3 — The Nuancier dialog already references font family tokens (Inter, Noto Sans Arabic, JetBrains Mono) in the palette descriptions. The team has clearly planned the font system — they just haven't wired it up yet. The fix is wiring the existing plan into `layout.tsx`.

4.1 The One-Line Fix

```
←!— In app/layout.tsx, add to <head> →  
<link rel="preconnect" href="https://fonts.googleapis.com" />  
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin />  
<link href="https://fonts.googleapis.com/css2?family=Inter:wght@300;400;500;600;700;800;900&fa  
  
/* In globals.css - define the --font-sans token */  
:root {  
  --font-sans: 'Inter', 'Noto Sans Arabic', -apple-system, BlinkMacSystemFont, system-ui, sans  
  --font-mono: 'JetBrains Mono', 'Fira Code', Consolas, monospace;  
  --font-serif: ui-serif, Georgia, Cambria, "Times New Roman", Times, serif; /* already defini  
}  
  
/* Apply via Tailwind's font-sans utility (already used in className="font-sans") */  
body {  
  font-family: var(--font-sans);  
}
```

4.2 Why Inter + Noto Sans Arabic

Inter is the de facto standard for modern web UIs (used by Linear, Vercel, Stripe, GitHub). It's an open-source sans-serif designed specifically for screen readability, with a complete weight range (100-900), excellent hinting, and a wide character set. Noto Sans Arabic is Google's open-source Arabic font — it covers the full Arabic script range with consistent letterforms across devices. Together, they provide a stable, branded identity for both Latin and Arabic text. The JetBrains Mono addition handles the monospace use cases (code, badges, kbd-style hotkey indicators).

4.3 The Better Approach · next/font

For a Next.js app, the even better approach is `next/font/google`, which self-hosts the fonts (no Google Fonts request, no third-party dependency, no privacy concern) and preloads them at build time. Effort: same 30 minutes, but eliminates the external dependency. Recommended for production.

```
// In app/layout.tsx - using next/font (recommended)
import {{ Inter, Noto_Sans_Arabic, JetBrains_Mono }} from 'next/font/google';

const inter = Inter({{
  subsets: ['latin'],
  weight: ['300', '400', '500', '600', '700', '800', '900'],
  display: 'swap',
}});

const notoArabic = Noto_Sans_Arabic({{
  subsets: ['arabic'],
  weight: ['400', '500', '600', '700'],
  display: 'swap',
}});

// Apply via className on <html> or <body>
<body className={{`{{inter.className}} {{notoArabic.className}} font-sans antialiased`}}>
```

Recommendation · next/font Approach

Use `next/font/google` instead of the Google Fonts `<link>` approach. The `next/font` module self-hosts the fonts (no external request, no privacy concern, no GDPR issue), preloads them at build time, and applies `font-display: swap` automatically. Effort is the same 30 minutes. This is the production-grade approach for a Next.js app.

— CHAPTER 05 · VERDICT & FIX PLAN

Final Assessment & Phased Rollout

The Typography system has a **genuinely excellent scale** (8 steps, calc-based line-heights, 6 weights, 5 tracking levels) — but it's undermined by the missing custom webfont. The hierarchy is correct, the tokens are well-defined, the team has clearly planned the font system (the Nuancier descriptions reference Inter, Noto Sans Arabic, JetBrains Mono). The fix is 30 minutes of wiring, not hours of design. Total grade: **B** — A- scale, D implementation, lifted to A- with one morning of work.

5.1 Phased Fix Plan

PHASE	FIXES	EFFORT	OUTCOME
Phase 1 · Now (Today)	Wire Inter + Noto Sans Arabic + JetBrains Mono via next/font	~30 minutes	Grade lifts to A-. Stable brand identity across all devices.
Phase 2 · Next (This week)	Add a variable-font strategy (Inter Variable + Noto Sans Arabic Variable)	~1 hour	Grade lifts to A. Reduced payload (1 file vs 7 weights).
Phase 3 · Later (Quarter 2)	Add an editorial serif (Source Serif Pro) for RCP body text	~2 hours	Nice-to-have. Improves RCP readability.

5.2 Cross-Feature Dependencies

- ✓ Feature #53 (Color System) — typography tokens are part of the broader design-system token architecture covered in #53
- ✓ Feature #55 (Spacing & Layout) — the type scale pairs with the spacing scale to produce the vertical rhythm
- ✓ Feature #59 (Visual Hierarchy) — the type hierarchy IS the visual hierarchy; both reports cover overlapping ground
- ⚠ Feature #1 (Routing) — once custom fonts load, verify no FOUT (flash of unstyled text) on route transitions
- ⚠ Feature #3 (Performance) — next/font adds ~80KB to the initial payload; verify LCP stays under 2.5s

5.3 Final Assessment

8 TYPE SCALE STEPS	6 FONT WEIGHTS	0 WEBFONTS LOADED
B GRADE	~30m PHASE 1 EFFORT	~1h PHASE 2 EFFORT

FINAL VERDICT · B GRADE, 30 MINUTES FROM A-

The Typography system has a **genuinely excellent scale** — 8 modular steps with calc()-based line-heights (the correct typographic curve where small text gets proportionally more line-height than large text), 6 font weights, 5 letter-spacing levels, and a clean DOM-verified element hierarchy. But the entire system is undermined by the missing custom webfont — `document.fonts.size === 0`. The fix is mechanical: wire Inter + Noto Sans Arabic + JetBrains Mono via next/font/google in `layout.tsx`. 30 minutes of work lifts the grade from B to A-. The team has clearly planned the font system (the Nuancier descriptions reference all three fonts) — they just haven't wired it up yet. This is the highest-ROI single fix in the entire 68-item review menu: 30 minutes of work, lifts a B to an A-, and removes a real product weakness (unstable brand identity across devices).

Immediate Next Steps

1. Install `next/font` (already bundled with Next.js 13+) — 0 minutes.
2. Add the Inter + Noto_Sans_Arabic + JetBrains_Mono imports in `app/layout.tsx` — 10 minutes.
3. Apply the font classNames to `<body>` — 5 minutes.
4. Verify `document.fonts.size` returns `> 0` in DevTools — 5 minutes.
5. Verify Arabic script renders in Noto Sans Arabic (not the OS fallback) — 10 minutes.
6. Defer Phase 2 (variable fonts) and Phase 3 (editorial serif) — both are nice-to-haves.

54

8-step scale with `calc()` line-heights, 6 weights, 5 tracking levels. But 0 webfonts loaded — entire UI on OS fallback stack. 30 minutes of next/font wiring lifts to A-.

5

CHAPTERS

3

SCREENSHOTS

8

SCALE STEPS

B

GRADE
