
Query Tree

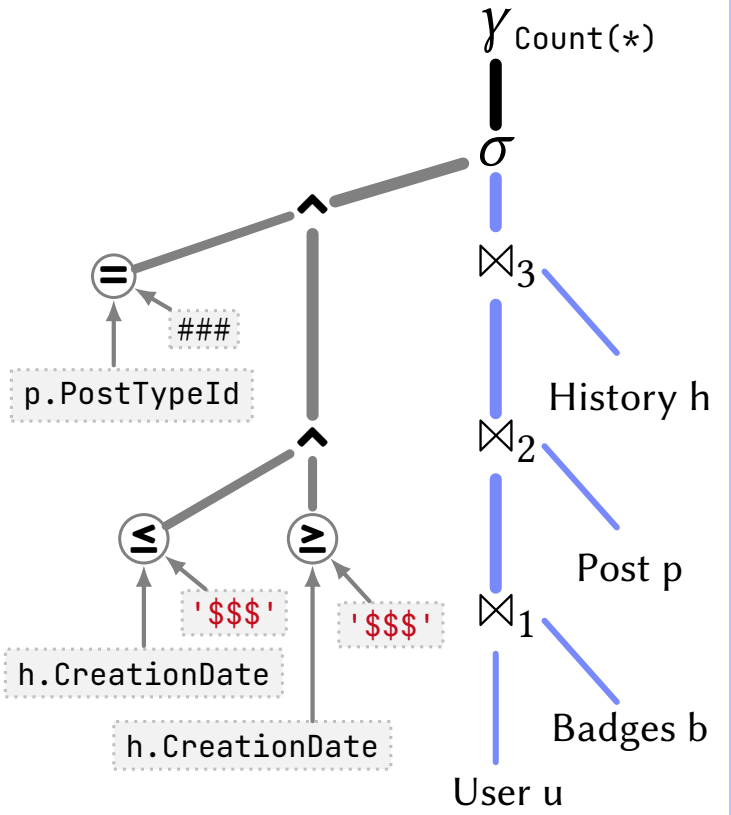

Projected Metadata

Table User

tuples:	40,325
cols :	14
index :	id
PK :	id
FK :	--

Table Badges

tuples :	79,851
cols :	4
indices:	id, userid
PK :	id
FK :	userid

Table History

tuples :	303,187
cols :	9
indices :	id,postid,userid
PK :	id
FKs :	postid, userid
CreationDate:	timestamp without time zone

Table Post

tuples :	91,976
cols :	21
indices :	id,parentid, owneruserid,
:	lasteditoruserid
PK :	id
FKs :	parentid, owneruserid,
:	lasteditoruserid
PostTypeId:	integer, min=1, max=7,
:	distinct count = 7

Inferred Rules

◆ Dead code & redundant ops

1. **Users** table is not filtering
2. three other tables already reference **users.Id**

◆ Duplicate joins

3. each table has many rows per **user**:
   - Users⟶History=1:N
   - Users⟶Posts=1:N
   - Users⟶Badges=1:N

◆ Predicates for index use

4. **History.CreationDate** is a range filter
5. index exists on:
   - History(userid)
   - History(postid)

◆ Heuristic join reordering

6. History×Posts×Badges×Users
7. join small relations

◆ Collapse nested aggregates

8. only `COUNT(*)` is returned