Republic of the Philippines
Western Mindanao State University
College of Computing Studies
DEPARTMENT OF COMPUTER SCIENCE
Zamboanga City

HULI-KAMOTE: CAMERA-BASED MULTI-VIOLATION DETECTION AND NON-CONTACT APPREHENSION SYSTEM FOR URBAN TRAFFIC ENFORCEMENT IN ZAMBOANGA CITY

A Thesis Presented to the Faculty of

Department of Computer Science

College of Computing Studies

In Partial Fulfillment of the Requirements for the Degree of

Bachelor of Science in Computer Science

JEHANA H. KAIRAN

EMMAN NICHOLAS BLABE B. IDULSA

FATIMA SHEENA SHARIFA T. ABUBAKAR

Researchers

Marjorie A. Rojas

Adviser

Republic of the Philippines
Western Mindanao State University
College of Computing Studies
DEPARTMENT OF COMPUTER SCIENCE
Zamboanga City

Approval Sheet

The Thesis attached hereto, entitled **"HULI-KAMOTE: CAMERA-BASED MULTI-VIOLATION DETECTION AND NON-CONTACT APPREHENSION SYSTEM FOR URBAN TRAFFIC ENFORCEMENT IN ZAMBOANGA CITY"**, prepared and submitted by **JEHANA H. KAIRAN, EMMAN NICHOLAS BLABE B. IDULSA, FATIMA SHEENA SHARIFA T. ABUBAKAR**, in partial fulfillment of the requirements for the degree of Bachelor of Science in Computer Science, is hereby **recommended for Oral Examination**.

MARJORIE A. ROJAS
Adviser

APPROVED by the Oral Examination Committee on _____ with a rating of **PASSED**.

ODON A. MARAVILLAS JR.
Chairperson

LUCY F. FELIX SADIWA	**MARJORIE A. ROJAS**
Member	Member

ACCEPTED in partial fulfillment of the requirements for the degree of **BACHELOR OF SCIENCE IN COMPUTER SCIENCE**

MR. JAYDEE C. BALLAHO, MIT
Head, Department of Computer Science

ENGR. MARK L. FLORES, PhD
Dean, College of Computing Studies

Acknowledgment

<This section recognizes the persons and organizations who assisted the researchers in the completion of the thesis. Acknowledgments should be expressed simply and tactfully.>

Abstract

<A concise and factual abstract is required. The abstract should state briefly the research problem/gap, research objectives, methodology, the principal results with number values and major conclusions. An abstract is often presented separately from the manuscript; hence, it must be able to stand alone, preferably typed in one paragraph and should be at least 200 words but not to exceed 350 words and single space.>

Keywords: <Immediately after the abstract, a maximum of 5 keywords should be provided indicating the scope of the paper. They should be arranged in alphabetical order>

Table of Contents

Approval Sheet i

Acknowledgment ii

Abstract iii

Table of Contents iv

List of Figures vi

List of Tables vii

List of Appendices viii

CHAPTER I INTRODUCTION 1

Background of the Study 1

Statement of the Problem 3

Objectives 3

Scope and Limitations 4

Significance of the Study 7

Definition of Terms 10

CHAPTER II REVIEW OF RELATED LITERATURE 14

Motorcycle Violations 14

Car Violations 16

Detection Studies 18

Tracking Studies 20

OCR (Optical Character Recognition) 21
Synthesis 23
Conceptual Framework 30
CHAPTER III METHODOLOGY 33
Research Design 33
Data Collection 36
Algorithmic Framework 45
Evaluation Metrics and Performance Benchmarking 51
Testing and Evaluation 53
Descriptive Interpretation Intervals 56
Ethical Considerations and Data Anonymization 57
Institutional Data Request and Consent 57
Mandatory Anonymization Loop 58
CHAPTER IV RESULTS AND DISCUSSION 59
CHAPTER V CONCLUSION AND RECOMMENDATIONS 60
Conclusion 60
Recommendations 60
References 61

List of Figures

Figure 1: Conceptual Framework of the HULI-KAMOTE Automated Traffic Enforcement Platform..... 31

Figure 2: Operational Flowchart of the Modular Traffic Violation Detection..... 34

List of Tables

Table 1: Definition of Terms 10

Table 2: Review Matrix of Literature 23

Table 3; Traffic Violation Detection Matrix 40

Table 4: Range of Mean Scores and Qualitative Interpretations for the Four-Point Likert Scale 56

List of Appendices

Appendix A: Data Collected 65

Appendix B: System Design 68

Appendix C: Evaluation Tool 71

Appendix D: Relevant Source Code 75

Appendix E: Ethical Clearance 76

Appendix F: Plagiarism Report 77

Appendix G: Research Critique and Editing Certificate 78

Appendix H: Curriculum Vitae 79

Appendix I: Informed Consent 80

CHAPTER I

INTRODUCTION

Background of the Study

In recent years, road safety in Zamboanga City has reached a critical point. According to reports from the Philippine Information Agency, traffic-related accidents are rising because of increased vehicle usage and a widespread culture where people do not follow traffic laws. Physical checkpoints and on-the-ground enforcers are commonly employed by local authorities, but this manual operation is very limited due to unpredictable weather, lack of personnel, and the physical risks that traffic operators on busy roads confront, leaving large stretches of the city with little to no enforcement and riders free to ignore the rules.

Despite local ordinances like the strict "No Helmet, No Travel" policy under City Ordinance No. 248, also known as the Revised Traffic Code for Zamboanga City, and Republic Act No. 10054, also known as the Motorcycle Helmet Act, a significant number of riders still travel daily without headgear, often carrying multiple passengers, and this pattern of ignoring the rules does not stop at helmets. This reckless behavior is where the name "kamote riders" comes from, used locally to describe motorists who consistently ignore road rules in ways that put others at risk. For how many months, a Facebook page called "Zamboanga Idiot Drivers" became a regular topic of conversation because it was being shared everywhere. It went viral from actively posting pictures of motorcycle riders caught breaking rules on Zamboanga roads. What was alarming aside from the violations

caused was that concerns about privacy were raised by the people who saw some of the posts that contained recognizable pictures of the people involved without their knowledge. The same reckless pattern is not limited to motorcycle riders. Car drivers contribute to the same problem, with violations such as going against the flow of traffic, illegal parking, and illegal turning, among others.

Deploying an untested system on an actual road was not something we could responsibly do within a thesis timeline. Our adviser recommended keeping the study within a simulation setup so we could verify that the detection logic works before any live deployment is considered. The system is built so that a live camera can be connected in the future, but all testing for this study was done using pre-recorded footage and controlled video input only.

To address this gap, this study proposes a local offline dashboard that automatically flags detected violations, logs the violation type, source camera, confidence score, and a captured frame for each event. Also, the system emails a notification when a violation is recorded. It records the accumulated violations per vehicle by using a demerit point counter and it provides an option for motorists to file an appeal to a separate portal. The system runs on local hardware and does not connect to any government enforcement database. No record it produces is submitted to any agency or used in actual enforcement.

Statement of the Problem

Traffic violations in Zamboanga City are not always recorded consistently because manual monitoring depends on the presence, location, and availability of traffic personnel. As a result, violations that occur outside an enforcer's presence go unrecorded, and the kamote behavior behind them goes unaddressed and keeps going. Without an automated way to detect, notify, and document these violations, there is also no basis for tracking repeat offenders or giving motorists a structured way to dispute a flag.

Specifically, this study aims to answer the following questions:

1. What traffic and driving violations can the system detect from video input?
2. How does the system notify, record, and allow review of detected violations?
3. How accurately does the system log and organize detected violations?
4. What are the limits of the system's performance under simulation conditions?

Objectives

The general objective of this study is to develop HULI-KAMOTE, a prototype designed with an architecture to support live camera implementation for detecting multiple traffic and driving violations.

Specifically, this study aims to:

- To gather and prepare a video dataset covering both traffic and driving violations for motorcycles and cars;
- To build and train a detection model that catches multiple violation types at once and follows how a vehicle moves across frames, with each detection tagged to the specific camera that captured it;
- To integrate violation flagging, plate number reading, email notification, user appeal function, and demerit point tracking into a two-interface dashboard with an Admin view for LTO personnel and a Violator Portal for motorists; and
- To evaluate detection performance and logging accuracy under simulation conditions, and gather feedback from LTO personnel as the target users through a live demonstration.

Scope and Limitations

The system built for this study is a prototype that processes traffic video by identifying selected violations, reading the plate number, assigning a violation case number, and storing the results in a local dashboard. The dashboard has two sides, an Admin Dashboard for LTO personnel and traffic enforcers to review flagged violations, and a Violator Portal where a registered motorist can check their records and file an appeal. When a violation gets logged, the system sends an email notification automatically, and accumulated violations per plate number are tracked through a demerit point counter inside the dashboard. Rather than testing on a live road, this study keeps all testing within simulation, recorded footage, and

controlled video input. This architecture is built to support a live camera connection in the future, but that is not what this study tests.

The target users of this system are LTO personnel and local traffic enforcers in Zamboanga City. They are the ones expected to use the Admin Dashboard and serve as evaluators when the system is demonstrated.

Two vehicle types are covered, specifically motorcycles and cars. The violations selected between motorcycles and cars are almost the same: counterflow driving, illegal parking, illegal turn, disregarding traffic signs, and no visible plate number. Additional violations for motorcycles are no helmet, missing side mirror, and overloading. The panel also requested the inclusion of signal light violations, red light running, Swerving, No seatbelt, and pedestrian lane obstruction. These are being considered as extended targets, but whether they make it into the final prototype depends on what the hardware can handle during development. In selecting the primary categories, we considered whether the violation was visible in a single frame or whether it could be inferred from how a vehicle moves across a short sequence of frames. Each detected violation is also tagged to the specific camera that captured it.

For the video material, we will pull from different sources depending on what is available. Pre-recorded traffic footage will be formally requested from barangay offices in Zamboanga City, starting with Barangay Baliwasan, and other barangays will also be approached if that request is delayed or if more footage is needed. Traffic footage from the Metropolitan Manila Development Authority (MMDA) will

also be requested through the electronic Freedom of Information (eFOI) Portal. GTA V gameplay recordings will be used as a synthetic source since they produce controlled road scenarios without capturing real people. Public datasets from COCO, Kaggle, and Roboflow Universe will supplement these. If none of the above becomes available, the researchers will record the footage themselves. The target is at least 3,000 images, annotated through Roboflow with an 80/10/10 training split.

Only what is necessary to log the violation will be stored. Faces and personal information of the drivers are not included in the records. The system is tested offline using local computing resources. It does not connect to any government enforcement database or make final enforcement decisions. Email notifications, appeal records, and demerit points are all contained within the prototype and carry no legal weight. Nothing the system logs is used in official enforcement.

The study has several limitations. Because no camera was deployed on an actual public road, the system's output reflects only what occurs under the selected simulation and controlled-footage conditions. Video quality also affects detection accuracy, particularly when footage is blurry, dark, highly compressed, small in the frame, angled, or blocked. Reading the plate number becomes especially difficult under those same conditions, or when the plate itself is dirty or damaged. Side mirror detection is also harder than the others because mirrors are small objects and the rider's arms often block them in the frame.

Movement-based violations, such as counterflow, also require enough frames to show the direction of travel, so a very brief wrong-way movement may not be detected. Because some footage may come from outside Zamboanga City, including GTA V scenes and MMDA recordings, the results may not fully reflect traffic patterns specific to the city.

Significance of the Study

Camera-based traffic detection is not new, but a locally-built and simulation-tested version with documented results is something that did not exist for the City of Zamboanga before this study. The groups listed below each have a different reason to find it useful, ranging from local traffic offices looking at what detection could look like in practice, to future researchers who need a working local example to build from.

For LTO personnel and related agencies, LTO staff are the target users of this system and will take part in the evaluation once the prototype is completed. They will review the system through a live demonstration and their feedback will be documented using the FURPS model and System Usability Scale. What they say during the evaluation will be recorded and may be referenced in future discussions about traffic monitoring, though any actual use may still require legal and policy clearance from other agencies. If this system is ever implemented, personnel would not need to be in the field at all times and the workload becomes more manageable through the dashboard.

For Zamboanga traffic enforcers, when there is no enforcer present because of bad weather, shortage of manpower, or roads that cannot be covered all at once, the system serves as a surveillance tool that can record and monitor in their place. It is not meant to replace them, it just fills in the gaps they cannot physically be at.

For motorists and commuters, they are the ones that share the road daily, they will be the direct beneficiaries. Although it does not get that far yet, but showing that automated detection is technically buildable here using available local tools is the first step. If kamote behavior gets caught more consistently someday because of systems like this, roads become safer and traffic moves better for everyone using them.

For the College of Computing Studies community, the presented research becomes a reference for future students who want to work on traffic monitoring in Zamboanga City. This documents the entire setup, from dashboard design to detection logic, so the next team working on something similar will not have to start from nothing.

For future researchers, the full workflow including the detection logic, tracking thresholds, dashboard design, email notification, appeal feature, and demerit system is all built out here as a starting point for Philippine traffic detection research. The existing documentation can be further developed upon by anyone wishing to expand this work.

Definition of Terms

Some of the terms below have broader meanings outside this study. What follows is how each one is defined for the purposes of HULI-KAMOTE and its testing setup.

Table 1: Definition of Terms

Term	Definition
1. Admin Dashboard	The LTO staff-facing interface where detected violations are reviewed, managed, and monitored.
2. Bounding Box	A rectangular marker drawn by the detection model around a detected object, such as a vehicle, rider, helmet, plate, or traffic sign.
3. Captured Frame	The selected video frame saved by the system to show the visible basis of a detected violation for reviewer checking.
4. Computer Vision	A field of computing that allows software to process images or video and identify objects, patterns, or actions.
5. Counterflow	A movement-based violation where a vehicle travels against the expected flow of traffic in a lane or road segment.
6. Dashboard	The local web interface where the system displays detected violations, evidence frames, timestamps, vehicle data, and review status.
7. DeepSORT	A tracking method used to follow the same detected vehicle across multiple frames and maintain its assigned track identity.
8. Demerit Point System	A dashboard feature that accumulates violation counts per vehicle plate number.

Term	Definition
9. EasyOCR	An optical character recognition tool used in this study to attempt reading visible license plate characters from cropped plate images.
10. eFOI Portal	A Philippine government website where anyone can file formal requests for public documents online, where MMDA footage request is submitted.
11. False Negative	A case where the system fails to detect a violation that is actually present in the video.
12. False Positive	A case where the system marks a violation even though the violation is not actually present.
13. FastAPI	A Python-based backend framework running on localhost that connects the detection pipeline to the Flutter dashboard.
14. Flutter	The frontend framework used to build the HULI-KAMOTE dashboard, including both the Admin Dashboard and Violator Portal views.
15. Ground Truth	The manually checked reference label used to compare whether the system output is correct during evaluation.
16. HULI-KAMOTE	The prototype developed in this study for detecting selected traffic violations and organizing them in a dashboard.
17. Kamote	A commonly used local term for a driver who consistently ignores traffic rules, practices, and puts others at risk.
18. License Plate Recognition	The process of locating and reading the characters on a vehicle plate from an image or video frame.
19. Live Camera Input	A camera that feeds video directly into the system as it happens, in real time. The architecture of HULI-KAMOTE supports this kind of input, but all testing in

Term	Definition
	this study used pre-recorded footage and controlled video only.
20. Logging and Organization Accuracy Rate	An integration metric that checks whether the system correctly records the violation type, vehicle identity, plate result, and evidence frame for a ground-truth event.
21. mAP@50	mAP@50 is the score we used to see how well the detection model was doing overall. A detection only counts as a hit if the box the model drew overlaps with the actual object by at least 50%.
22. MMDA	The Metropolitan Manila Development Authority manages traffic and urban development in Metro Manila. Traffic footage from MMDA was one of the sources requested for use in this study.
23. OCR	Optical character recognition, or the conversion of visible text in an image into machine-readable characters.
24. Simulation-Based Testing	Testing performed using controlled video, generated scenes, or replayed footage instead of live deployment on public roads.
25. SMTP Server	The email protocol used to send automated violation notifications to registered motorists when a violation is logged.
26. Track ID	A temporary identity assigned by the tracking module to a vehicle while it appears in the video sequence.
27. Traffic Violation	A selected road-rule violation included in the scope of this prototype, such as missing helmet, illegal parking, counterflow, or no visible plate.
28. Violator Portal	The motorist-facing dashboard view where a registered user can check their violation records and file an appeal.

Term	Definition
29. YOLO	An object detection model family used to locate and classify objects in images or video frames.

CHAPTER II

REVIEW OF RELATED LITERATURE

Motorcycle Violations

After grouping the related studies into their common themes, we noticed that motorcycle violations are harder to catch on camera because of their size and the conditions they are usually captured in. Motorcycles are smaller than cars, so cameras can miss them easily, especially when they are hidden behind bigger vehicles. That is why the systems proposed by different researchers do not perform the same way, some work well while others struggle, depending on the model they used.

One study that stood out is the one by Nishant et al. [5], where the researchers built an AI system that checks whether riders are wearing a helmet, with an added feature that also detects if the motorcycle has no side mirrors. Their main focus was really on catching helmetless riding, and the side mirror detection was more of a bonus feature, but it still counts as one of the few studies that touched on side mirror detection under motorcycle violations. This study might be the closest to what we are trying to build, since they combined both helmet and side mirror detection. The problem though is that the system struggles to detect side mirrors accurately because mirrors are small, come in different shapes, and can easily be blocked by the rider's body. This tells us that side mirror detection could also be a challenge for our own system, not only because of the different

shapes and sizes of motorcycles here in the Philippines, but also because the results may not hold up if we use datasets that were not tested locally.

Looking at local studies, there is one that focused on detecting riders who are not wearing a helmet properly, conducted in Makati City using a YOLOv5-based model [6]. Their system sorts riders into four groups: those wearing a full-face helmet, those wearing a half-face helmet, those wearing an improper helmet such as a bicycle cap, and those not wearing any helmet at all. By classifying riders this way, the model was able to perform well overall. However, the system still makes some mistakes and confuses the categories because the dataset used was not balanced, meaning some helmet types had a lot more sample images than the others.

Aside from the challenge of detecting side mirrors, another common issue among the studies is detecting violations at night or in low-light conditions. Two studies tackled this problem. The first is by Bose et al. [7], who added a feature that enhances dark video footage before running detection, using a YOLOv8-based system built to catch three types of two-wheeler violations. Their system was designed to detect helmetless riding, triple riding, and dangerous driving maneuvers, and most of these violations overlap with what we plan to detect, except for the dangerous driving part. The downside of their system is that it can still miss violations or make mistakes when riders wear caps or unusual headwear, since the AI sometimes mistakes these items for actual helmets.

The second study, by Deshpande et al. [8], took a different approach compared to the ones mentioned earlier. It used a two-stage system built for a smart city setup in India, where the motorcycle violation is detected first, followed by reading the vehicle's license plate. To do this, they used DetectNet_v2 to locate the riders, then applied YOLOv8 together with OCR to read the plate number in real time. The issue with their system is that it can still miss detections under low-light or blocked conditions, and it also struggles to localize riders accurately when many motorcycles are packed closely together, causing the tracking boxes to overlap.

Looking at all the studies gathered under motorcycle violations, most of them still feel incomplete compared to what we are trying to build. They do not really address the main purpose behind building a multiple-violation detection system. This is because most studies only focus on detecting helmetless riding and reading plate numbers, and while a few attempted side mirror detection, the results were often inaccurate. So far, no study has looked into detecting motorcycles that are illegally parked, making illegal turns, going against the flow of traffic, carrying excess passengers, or disregarding traffic signs.

Car Violations

Car-related violations feel more surprising compared to motorcycle violations. How can a big and visible vehicle still commit a violation, knowing that it can easily be caught on camera? Is it because drivers feel confident that the

detection models will fail to notice them, or is it simply because of weather conditions that make the detectors less accurate?

One study showed that its system does not perform well when the weather is bad or when lighting is poor, since these conditions make vehicles harder to see. This was the study by Dede et al. [1], who built a mobile app that catches six types of bad driving behavior, including running red lights, illegal parking, and tailgating. Their system was able to identify violations and log plate numbers, which shows that mobile AI-based enforcement can still work outside of a fully controlled setup. However, their system only generates one violation log per detection event, which means that a motorcycle running a red light without a helmet and with a covered plate would still count as just a single log entry.

Another study, by Ong et al. [2], used fixed CCTV cameras instead, relying on actual footage to catch red-light running and illegal overtaking. The accuracy was reasonably good, and it did not need any new hardware, but the system still could not cover the range of violations that enforcers deal with on a daily basis. A system built around only one or two violation types will likely miss the rest. For example, a vehicle could park illegally, cross a lane marking, and be missing a side mirror all at the same time, but these would count as three separate incidents that the system might not fully capture.

There are also studies that focus more on classifying and identifying road users rather than the violations themselves. One example is the study by Ke et al. [3], which centered on monitoring roads and traffic. They combined background

modeling and SORT tracking with a custom trigger method to detect vehicles, and even built a classifier to sort road users into types such as cars, trucks, and buses. However, their AI classifier is resource-heavy, meaning it cannot process every video frame unless the trigger framework selectively skips some frames. Their system also experiences low accuracy when it fails to tell apart similar features between vehicle types, sometimes grouping a vehicle into the wrong category.

The second study, by Polu [4], centers around car recognition using a YOLO-based detection model. He proposed an AI-powered violation detection system that catches four specific problems: signal jumping, overspeeding, lane violations, and unauthorized vehicle movement. According to the study, tracking accuracy can drop during heavy traffic since too many vehicles can block the camera's view, and the system also struggles with poor visibility at night. This shows that future researchers still need to improve low-light image processing for these systems to work properly in the dark.

Detection Studies

When it comes to detection studies related to traffic violations, most of them rely on YOLO models. Looking closer, different YOLO versions were used across the studies, and each version performs differently depending on which one was chosen. YOLO versions are a lot like new generations of smartphones, they all do the same basic job of detecting objects, but each new version tends to be faster, smarter, and more accurate than the last.

One example is the study by Jin et al. [9], where the team used an older version, YOLOv4, to identify and track the same vehicle as it moved across multiple surveillance cameras. However, they found that the model struggled to correctly identify or track vehicles whenever they were blocked or hidden by other cars.

On the other hand, a study by Manoj et al. [10] showed that a newer version, YOLOv8, handled vehicle identification better by grouping vehicles into four main categories: two-wheelers, three-wheelers, four-wheelers, and large vehicles. By organizing vehicles this way, the system was able to classify them properly even when a vehicle was blocked or partially hidden, since it could still be sorted into its correct category.

Another study used an older version, YOLOv5, to detect Chinese license plate characters under natural and complex environments [11]. However, their system had trouble accurately recognizing characters from provinces other than Anhui, since the training data used was not balanced. This suggests that YOLOv5-based models tend to miss vehicles that are very small or heavily blocked from view.

In contrast, a study by Aboah et al. [12] tried to catch violations under visually complex conditions such as occlusion and difficult camera angles, using YOLOv8, and found that it could still detect accurately even when the weather changed.

Tracking Studies

Tracking a vehicle is a different challenge compared to simply detecting one. This is why picking the right tracking tool matters, since it decides whether the system can properly identify and follow a vehicle instead of just following it blindly.

One study used the ByteTrack method, which had a weakness of following every detected vehicle even when the detector itself was not confident about the detection. This was the study by Liu et al. [13], who tracked vehicle flow across four classes, cars, buses, vans, and others. They used ByteTrack to capture the distinct appearance of each vehicle, but found that the system struggled to maintain a clear and stable image due to the complexity of the traffic environment.

Meanwhile, a study by Zhao et al. [14] used DeepSORT as their tracking method and found that it could use a vehicle's movement and appearance together to keep the same ID across frames, proving that DeepSORT can maintain the correct ID even when vehicles overlap. Their system also extracted multi-vehicle motion data, which shows that this tracking method is more reliable for tracking individual vehicles compared to a method like ByteTrack that tracks almost everything the detector picks up.

For tracking multiple vehicle classes at once, one study used the BoT-SORT algorithm to track cars, buses, trucks, and motorcycles [15]. However, their system slows down as more vehicles appear in the frame, which lowers the processing speed. Even though it is better at keeping the correct ID when vehicles

overlap or when the camera itself is moving, a system that needs stable ID tracking may still be better off using DeepSORT.

This is why the study by El-alami et al. [16] is more relevant to what we are building, since they used the DeepSORT algorithm to track and detect multiple vehicles in urban traffic. Their results show that DeepSORT can describe what a vehicle looks like and use that description to recognize the same vehicle again even after it was lost from view.

Another study used STC-SORT to detect multiple object positions, but it was mainly designed to keep the vehicle's movement smooth and consistent rather than to maintain its ID [17]. One downside of this tracking method is that it is not widely adopted yet, so the available support and documentation are still limited.

One limitation we noticed across the studies is that most of them were conducted in traffic conditions that are different from what we usually see on Philippine roads.

OCR (Optical Character Recognition)

Detecting a violation in a video frame is only half of the job for a traffic enforcement system. Without a readable license plate attached to that violation, there is no way to know which vehicle was actually involved.

The study by Satya et al. [18] used an OCR engine to read license plate text after enhancing the image quality of the detected vehicles. They found that OCR works well for plate recognition since reading text from images is exactly

what it is built for. Without OCR, a system would only know where the plate is located, not what it actually says.

On the other hand, a study by Alvar, Uyanik, and Bajic [19] developed a system that detects elements in a traffic scene while protecting license plate privacy through a privacy-preserving method. They noted, though, that if the privacy setting is too strict, the system ends up lowering the quality of the plate images on purpose, making them hard or even impossible to read. This is a reminder that if we ever use a similar method to enhance our plate images, we need to be careful of this same weakness.

Research Gap and Synthesis

Each study reviewed in this chapter addressed a specific problem within traffic monitoring and violation detection. Some focused on a single violation type, like helmet non-compliance or red-light running. Others developed ways to read license plates, track vehicles across frames, or classify driver behavior. On their own, each of these contributions is well-supported by their results.

Although studies such as Dede et al. [1] and Ong et al. [2] for car-related violations, and Tomas and Doma [6] for motorcycle-related violations, were able to detect individual violations, their methods still leave a gap since no single system detects multiple violations across both cars and motorcycles at the same time.

Most of the reviewed studies were built around only one violation type or one vehicle class. The closest study to a combined approach was able to detect helmet non-compliance, missing side mirrors, and plate numbers together, but this

was limited to motorcycles only, captured from a single fixed camera angle, with no continuous tracking and no coverage of car-related violations.

While the detection and tracking studies proved that their models worked, they were mostly deployed under foreign conditions or as live systems, which leaves a gap for offline, simulation-based testing designed specifically for local Zamboanga traffic conditions.

Taken together, the combined studies still feel insufficient, since most of them lack the ability to detect multiple violations from both cars and motorcycles within an offline simulation setting. This gap is what pushes us to build an offline prototype that can detect the following violations: no helmet, overloading, no plate number, counterflowing, and no side mirrors as the primary scope, along with failure to use signal lights, beating the red light, blocking the pedestrian lane, illegal parking, illegal u-turn, reckless driving, and no seatbelt as the extended scope, modeled specifically after Zamboanga City traffic conditions.

Synthesis

Table 2: Review Matrix of Literature

Study	Problem	Algorithm	Dataset	Evalation	Strength	Limitations
[1]	Inefficiency of fixed traffic cameras	YOLOv5 + strongSORT +	YouTube + GoPro dash	Detection accuracy, LP	Demonstrates mobile AI enforcem	Single-camera angle;

Study	Problem	Algorithm	Dataset	Evalation	Strength	Limitations
	and manual policing in detecting widespread, multi-type traffic violations	WPOD-NET with MobileNet	cam footage	recognition rate	ent feasibility	bandwidth dependent
[2]	High cost, intensive maintenance, and inefficiency of traditional traffic violation detection methods (radar guns/sensors).	YOLOV8 + DeepSORT + Canny Edge Detection and Hough Transform.	Real-world CCTV traffic video footage collected from online repositories	Overall accuracy of 91.28% achieved by YOLOv8x.	Automation of both lane detection and traffic light state recognition without manual intervention.	High vulnerability to vehicle occlusion, causing incomplete lane/stop line detection.
[3]	High resource constraint	SORT + Multi-thread	Real-world traffic	Achieved an average of	Highly efficient, decentral	Inability to access or publish the

Study	Problem	Algorithm	Dataset	Evalation	Strength	Limitations
	s on edge computing devices	parallel system + Random Forest	surveillance video footage	15.3 frames per second (FPS) on a Raspberry Pi 4 edge device	ized multi-tasking edge intelligence	original verification data
[4]	High urban congestion, road accidents, and fatalities worsened by traffic violations.	YOLO + Spatiotemporal anomaly detection	CCTV Footage	98.2% achieved for vehicle identification	Complete end-to-end framework	Decreased detection accuracy and frequent missed detections
[5]	Human inconsistencies associated with manual traffic rule enforcement.	YOLOv8 + EasyOCR	Custom curated traffic image database	Exceptional precision for Number Plate (0.981) and solid returns for No Helmet (0.883)	Novel introduction of automated rear-view mirror compliance tracking	Limited geographic data focus
[6]	High road accidents and fatalities in the Philippines involving motorcycle riders	YOLOv5	Custom field data	Successful classification of 791 out of 809 total detected motorcycle riders	Highly efficient YOLOv5s frame to balance execution speed	Data imbalances and sample size inconsistencies

Study	Problem	Algorithm	Dataset	Evalation	Strength	Limitations
[7]	Hard to detect two-wheeler traffic violations under low-light conditions	YOLOv8 + SMTP	Custom LoLTV dataset	Precision, Recall, Accuracy, Time per detection	First two-wheeler violation dataset tailored for low-light scenarios	Model misclassifies non-helmet headwear as helmets
[8]	High fatality rates from motorcycle accidents.	Two-stage deep learning pipeline	Custom dataset of 1,715 images.	Precision, Recall, Accuracy, mAP50	High real-time object detection precision.	High training/validation simulation times.
[9]	Tracking traffic loads	YOLOv4 + Kalman Filter + Hungary Algorithm	Custom Jiubao Bridge dataset	Multi-camera: >92.5% accuracy	Adaptive lane division optimizes positioning without extra math	Susceptible to occlusions/blocked cars

Study	Problem	Algorithm	Dataset	Evalation	Strength	Limitations
[10]	Vehicle detection, classification, and counting for urban traffic surveillance	YOLOv8 + OpenCV	Custom dataset of 349 total images	Real-time testing via smartphone camera webcam	High recall rate (0.92) for large vehicles	Inaccuracies when counting multiple categories of vehicles simultaneously
[11]	License plate degradation in complex, unconstrained environments	YOLOv5 + PDLPR	CCPD + PKUData	Intersection Over Union (IOU)	No manual image correction or character segmentation needed	Limited type recognition due to training data
[12]	Lack of real-time performance in existing systems	YOLOv8 + SCAN clustering algorithm + TTA	2023 NVIDIA AI City Challenge	mean Average Precision (mAP)	High precision across diverse visual environments	Computational overhead
[13]	Traditional methods face poor small object detection	MSN-YOLOv8n + ByteTrack	UA-DETRAC subset	mAP50, MOTA, MOTP, IDF1, FP, FN, IDS, and FPS	Reduced parameters; good edge/small object handling	Struggles with environment changes like lighting and weather.
[14]	Degradation of dynamic weighing accuracy	SSD model + DeepSORT + GPS-based camera	Real traffic surveillance video from	MAE, RMSE, Accuracy and Recall	High detection accuracy (93.6%) and processi	High computational resource consumption

Study	Problem	Algorithm	Dataset	Evalation	Strength	Limitations
			Tongchuan City, Shaanxi Province		ng speed (66.3 FPS)	
[15]	Heavy reliance of traffic surveillance on manual observation	EfficientDet + BoT-SORT	Real-world traffic video	Vehicle Count per Frame	Stable identification of multiple overlapping	Evaluation restricted to an unspecified single video source
[16]	Inefficiency of sequential processing in two-stage object detectors	YOLOv5 + DeepSORT	Locally collected traffic video dataset	Processing Time per Frame (ms) relative to vehicle count	Exceptional scalability with near-constant frame processing times as traffic load spikes	Restricted validation on a single localized data source
[17]	Static, context-agnostic rule-based data	STC-SORT	VisDrone + UAVDT	Evaluated on MOTA, MOTP, IDF1, IDSW, MT, ML, FP,	Strong small-object and scale-variant detection	Scaling limits deployment

Study	Problem	Algorithm	Dataset	Evalation	Strength	Limitations
				FN, and FPS		
[18]	High computational demands of traditional ALPR systems	YOLOv8 + OCR	CCPD + UFPR-ALPR + RodoSol-ALPR	mAP@0.5, mAP@0.5:0.95, Precision, Recall, F1-score, Recognition Rate, and FPS	Enhanced OCR accuracy by up to 5.1% under low light	System struggles to generalize to uncommon license plate formats
[19]	Privacy threats from vehicle tracking	YOLOv3 + Modified information-theoretic "privacy fan"	Cityscapes dataset	mean Intersection over Union (mIoU), Root Mean Square Error (RMSE), and Character Recognition Accuracy (CRA)	Effectively balances privacy with utility	Requires selective input resolution scaling

Conceptual Framework

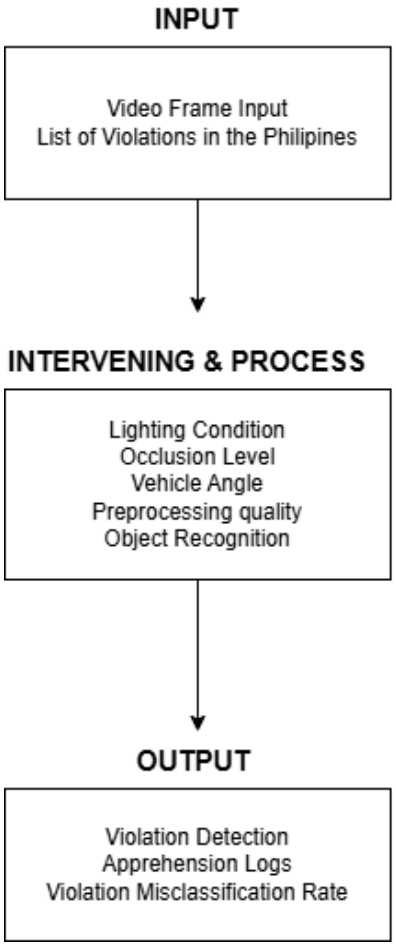


Figure 1: Conceptual Framework of the HULI-KAMOTE Automated Traffic Enforcement Platform

The conceptual framework of the HULI-KAMOTE is structured around the Input-Process-Output (IPO) model.

The input stage takes in raw video frames along with the list of traffic violations recognized in the Philippines, particularly the top 20 violations identified by the LTO. The system's overall performance depends heavily on this input. If the video frames are unclear or the violation list is incomplete, the rest of the system has nothing accurate to build on.

The processing stage is where the actual work happens. This is where the system handles conditions such as poor lighting, vehicles hidden behind other vehicles, and plates captured at low angles. These conditions are expected to affect the system's performance since they are common realities on Philippine roads.

The output stage is where the system produces its final results: the violation record (vehicle type, violation type, and plate number if readable), the apprehension logs for every captured violation, and the violation misclassification rate, which shows how often the system misclassifies a vehicle or a violation.

CHAPTER III

METHODOLOGY

Research Design

This study uses Applied and Simulation-Based Empirical Research Design to develop our project HULI-KAMOTE, which is a functional and automated non-contact apprehension software platform. We are to engineer a working software system instead of relying solely on theoretical modeling in order to fulfill a concrete enforcement mandate. As for the evaluation of the platform's efficacy, we will use actual pre-recorded traffic video traces taken from our sources which is done under a controlled, offline simulated environment; This approach of simulating the process of violation detection, allows us to benchmark the system's detection accuracy and logging the fidelity against traffic violators. Furthermore, due to the offline nature of conducting our tests, we can maintain strict compliance with the Data Privacy Act (R.A.10173) by not exposing live citizens to active surveillance.

To ensure modularity of our system, we organized the development of HULI-KAMOTE into three distinct phases. This approach allows us to modify or enhance parts of the pipeline without needing to start all over again. This is due to the nature of models that might be changed in the future for alternatives or the release of new and much more reliable models, which may be used in this system for better efficacy and performance.

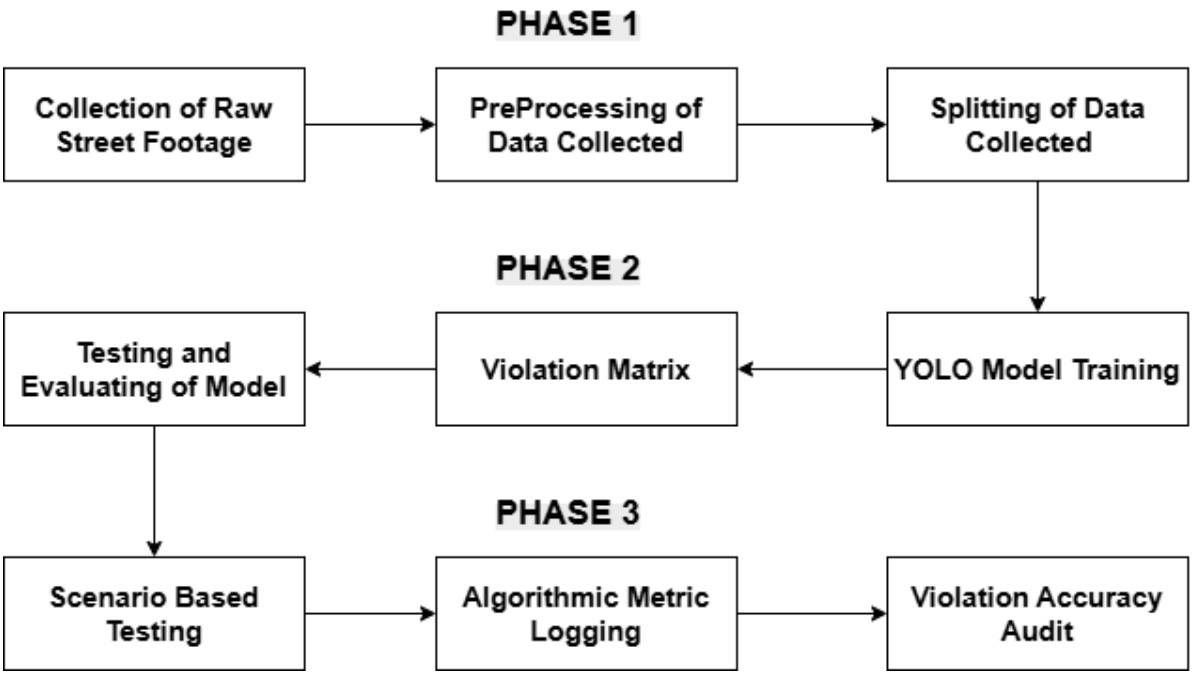


Figure 2: Operational Flowchart of the Modular Traffic Violation Detection Methodology

Phase 1: Input Preparation and Data Gathering

Initially, we focus on gathering the raw data for our system. We will prioritize institutional data from Barangay Baliwasan CCTV footages in the area, and the existing CCTV footages taken from MMDA to ensure that our models; when trained; will demonstrate effectiveness based on the Philippine road information. Since data privacy is a must, we are to comply with Republic Act 10173 by enforcing mandatory anonymization loop. We will apply Gaussian blurring to the faces of our riders and the plates of the uninvolved motorists or vehicles before

any annotation will be done, to ensure data privacy is protected even during the training stage of our chosen models.

Phase 2: System Development and Pipeline Integration

In this phase, we will build the core detection and tracking logic of our system. We are to base our software logic on our manually created Violation Matrix; which is composed of collected violations from existing traffic enforcement data in the Philippines; to ensure we can maintain consistency with the legal standards of the Zamboanga City Traffic Management Office. Modular Architecture is purposely done in each phase: Stage 1 handles the missing helmets, number of passenger for motor vehicles, along with the absence of plate number. Stage 2 uses the DeepSORT model to track the vehicle's path across the frame for violations such as illegal turning, illegal parking, counterflowing, and running on red traffic light. Stage 3 is where the extraction of license plate characters will occur upon passing the previous violation detection. With this integrated setup, it allows the system to resolve behavioral violations like counterflow while reading the violator's plate number characters.

Phase 3: Technical Audit and Expert Validation

This phase actually measures if the system is ready for road deployment. We will use the Logging and Organizational Accuracy Rate (LOAR) as our main scoreboard. This is designed to be stricty on a purpose that if a system detections violation but logs the wrong plate number, it would be worse than useless in a real

deployment and would result to false positives like ticketing oan innocent drive which may compromise the trust on our system. Additionally, we are to conduct a qualitative validation with Land Transportation Office (LTO) personnel whom of which is qualified and authorized for ticketing road violators by allowing them to interact in our dashboard and provide a verdict for its usability and effectiveness for actual deployment.

Data Collection

To train and evaluate our model, we chose to prioritize locally sourced video footages instead of generic datasets because the success of our system (HULI-KAMOTE) depends on catching violations that are unique to Zamboanga City. We aim to make our models adapt to the mixtures of vehicle found in our roads like motorcycles, jeepneys, tricycles whilst making it focus on motorcycles and car vehicles specifically. Hence, our data is being taken from three sources:

1. Barangay Baliwasan CCTV Data

Our main source is the closed-circuit television (CCTV) network from the main Office of the Punong Barangay Baliwasan by formally requesting their stored footages that accurately captures local street geometries and local traffic data flow. We are to provide our own local storage device as high quality uncompressed videos will consume a lot of space. By doing this, we aim to ensure that data acquisition from the barangay will not place a burden upon their digital infrastructure.

2. MMDA Historical Video Traces

This is our secondary source by which, we aim to acquire with our utmost capacity to acquire from the Metropolitan Manila Development Authority. Acquiring such data might take longer which could compromise our target deadline for this project, which explains why it is our second option for this study. But, acquiring such extremely high-density intersection scenes, it will train our models to be exposed with more demanding vehicle occlusion and much more higher vehicle counts than what our standard local footage from the barangay will provide.

3. Contingency Field Recording

If neither of our first two sources would every be available in worst case scenarios, we will resort to manual field recording; which serves as our insurance policy for this project and as a fallback plan. We intend to explicitly select sites in Zamboanga City that are known for high violation frequencies to increase our chances of acquiring data that we can train for our model as it requires real violation from within the footages we acquire in order to recognize violations. This should guarantee that our footages will represent an accurate perspective of a law enforcement, and it should allow us to capture "kamote" drivers safely for road violations.

Automatic Tagging Process

Upon extraction of frames from our acquired footage, we need to draw bounding boxes for every single frames of which vehicles are detected on our data which will be used to train our model. This process of manual annotation drastically slows down the development. Hence, we are to utilize an existing open-vocabulary Vision-Language Model named Grounding DINO to automatically annotate our raw footages. Grounding DINO will generate preliminary bounding boxes targeting the vehicles and license plates. This should save the researchers hundreds of hours for manual annotation.

The researchers are to be part in this process by visually verifying the accuracy of each bounding boxes. In this strict review phase, we are to assign the designated label class from our defined taxonomy. Incase of false negatives from the automated scripts, we will manually annotate the frames to ensure all necessary frames that require bounding boxes were annotated. In this exact phase, we are to set cross-frame tracking anchors which serves as a unique identifier that allows DeepSORT algorithm to trace the tracked vehicle across the sequential video frames. However, maintaining the identity track will be our main hurdle considering the dense traffic condition in Zamboanga City, hence, we will initialize a new track anchor upon a vehicle entering the frame and would retain that anchor until the vehicle leaves the camera frame or is covered by visual occlusion from a larger vehicle like trick or jeepneys.

Structured Label Taxonomy

In this study, we are to use our defined specific class taxonomy for annotation, organized by vehicle type for all training and evaluation:

Motorcycle Vehicle Classes:

• helmet_on — Rider's head region detects the presence of a helmet covering the crown, with chin strap discernible.

• helmet_off — Rider's head region has no helmet or covered only by non-protective headwear (cap, bandana, or similar).

• rider_bounding_box — Bounding box enclosing the primary rider seated at the front of the motorcycle.

• pillion_bounding_box — Bounding box enclosing any additional passenger seated behind the primary rider. Multiple pillion_bounding_box instances on a single motorcycle frame indicate an excess passengers or overloading violation (more than one pillion passenger is present beyond the vehicle's licensed two-occupant capacity).

• license_plate_zone — Bounding box localized to the motorcycle's rear or front-mounted license plate region, used as the input crop for the automated license plate character recognition engine.

Car Vehicle Classes:

• car_bounding_box — Bounding box enclosing the full vehicle body of a detected private automobile, defining the spatial region within which all carspecific sub-region classifiers operate.

• license_plate_zone — Bounding box localized to the car's rear or front license plate mounting position, used as the input crop for the automated license plate character recognition engine.

Traffic Violation Identification and Technical Detection Matrix

Below is the table inventory that this study plan to target, depending on the data we may collect. It is organized by its label classes, followed by the sample images to visualize the violation and the challenges to build it.

Table 3; Traffic Violation Detection Matrix

Classes to be Detected & Legal Basis	Sample Images	Implementation / Computer Vision Challenges
MOTORCYCLE — No Helmet / R.A. 10054 (Motorcycle Helmet Act of 1993): helmet_off, rider_bounding_box		Low resolution makes it hard to see where a helmet ends. Our model often confuses dark bandanas or backward caps with actual helmets, which creates detection errors. If a passenger's arm or a large delivery box blocks the rider's head, the system will lose the target zone entirely.

MOTORCYCLE — No Side Mirror / R.A. 4136 (Land Transportation and Traffic Code), Sec. 34: mirror_absent, rider_bounding_box		Side mirrors are small to see in the camera that's why there are difficulties when trying to detect if a mirror is missing. What more is that objects near the handlebars, such as brake levers and colorful decorations can be mistaken for mirrors.
MOTORCYCLE — Excess Passengers / Overloading / R.A. 4136, Sec. 54(f): rider_bounding_box, pillion_bounding_box (count > 1)		Excess passengers mean that there is an additional person who is sitting in the motorcycle and since when riders are sitting close together, the system may mistake it as one person only. The same as large sacks of rice or heavy bags carried on motorcycles because motorcycles in Zamboanga often carry those. It is also difficult to separate multiple riders when the motorcycle is moving fast because the image becomes blurry.

MOTORCYCLE — Counterflow / Driving Against the Flow / R.A. 4136, Sec. 45(b): Spatial-temporal tracking trajectory across annotated lane direction zones		When counterflowing, the riders are often blocked by a truck or a large vehicle from the camera's view, making the system lose track of it and fail to detect the violation.
MOTORCYCLE — Illegal Turns / R.A. 4136, Sec. 42(d); MMDA Regulation No. 96-009: Spatial-temporal trajectory analysis across annotated turn-restriction zones		Footages from older barangays are often low in quality, making turn detection more difficult. This could also make the system have difficulties telling the difference between an illegal turn and a rider who is only changing a position to avoid a pothole.

MOTORCYCLE — Illegal Parking / R.A. 4136, Sec. 51; Local Ordinance No. SP-1160: Stationary vehicle persistence within annotated no-parking zones		The system may mistake a motorcycle dropping off a passenger as parked motorcycles in a single frame. Frequent short stops may also cause the system to detect the parking violation incorrectly.
MOTORCYCLE — Disregarding Traffic Signs / R.A. 4136, Sec. 42(a): Trajectory crossing a stop-line or signal-state zone during a restricted signal phase		Riders often approach a stop-line and decelerate without actually crossing. These "creeping" behaviors at Zamboanga intersections produce proximity-based false positives where the system thinks a violation is about to happen.
MOTORCYCLE — No Plate Number / R.A. 11235 (Motorcycle Crime Prevention Act); R.A. 8750 (Seat Belts Use Act of 1999 analog for plates): license_plate_zone returns null character output from the automated license plate character recognition engine		Plates that are covered in mud after a rainy weather or hidden under a mudguard may make it hard to see in the camera. It is also small and difficult to read that the system may produce uncertain results that need to be checked manually.

CAR — Illegal Turns / R.A. 4136, Sec. 42(d); MMDA Regulation No. 96-009: Spatiotemporal trajectory arc across annotated turn-restriction ROI		The system may mistake the vehicle that was only changing lanes or making a legal wide turn as illegal turning when it is not. This may cause the system to detect a violation when there is none.
CAR — Illegal Parking / R.A. 4136, Sec. 51; Local Ordinance No. SP-1160: Stationary persistence within no-parking ROI		Double-parked vehicles often block each other so the system may find it hard to identify which one is violating the no-parking rule.
CAR — Disregarding Traffic Signs / R.A. 4136, Sec. 42(a): Centroid crossing stop-line during restricted signal phase		Large vehicles may slowly move past the stop line even when the driver is trying to stop properly. To prevent the large vehicles such as trucks and vans from being incorrectly detected as violating the stop line rule, the system will track the vehicle's center instead of its front edge.

CAR — Driving Against the Flow / R.A. 4136, Sec. 45(b): Spatiotemporal directional trajectory against annotated lane-flow reference		In busy roads, drivers may back up to make space which can confuse the system because it can look like they are driving the wrong way when they are not.
CAR — No Plate Number / R.A. 8750; R.A. 4136, Sec. 18: license_plate_zone returns null output or zero-confidence character extraction		Rainy season is always the challenge when detecting license plates because most of it will get covered in mud and dirt, making it harder to capture and read. In cases like these, the system must be able to distinguish between a vehicle with no license plate and a vehicle with an unreadable plate because these situations require different violation records.

Algorithmic Framework

The pipeline of HULI-KAMOTE is structured as a three stage computational framework where the output of each phase feeds directly into the next phase. Stage One will be the scanning of each video frames to detect vehicles and identify violations. Stage Two will monitor continues spatial movement of the vehicles over a specific duration of time. Stage Three will be activated upon confirmation of

violation to extract the alphanumeric license plate characters of the vehicle. With this structure, we can isolate algorithmic errors within individual pipeline before reaching and corrupting the final administrative log.

Stage 1: Spatial Object Detection and Attribute Localization

Our main model will aim to detect all target objects within a single isolated video frames for every single frames we have. The AI will track the position of every single vehicle within the frame and their positions while simultaneously scanning for target objects like helmets and plate number for motorcycles. Our system's Boolean evaluation logic is simple enough that it flags whenever the bounding boxes fail to detect the target object that must be present like helmets. And in order to detect the number of passengers, we are to use the same mechanism of counting the number of heads for detection of helmets and allows our model to flag for overloading of passengers. The plate detection is also being implemented within the bounding box of the vehicle, and once absent, it will automatically flag the "No Plate Number" violation. Lastly, to avoid messy data being sent to the next stage, this stage uses Non-Maximum Suppression (NMS) filter to remove duplicate or overlapping detections that are targeting the same vehicle and guarantees mathematically clean and verified frame records for our temporal tracking algorithm.

Stage 2: Spatiotemporal Multi-Object Tracking

Relying on a single frame cannot verify whether the vehicle is on an illegal parking violation, or counterflowing and alike. Hence, we are to utilize DeepSORT algorithm to do the task. What it does is it tracks our target by fusing the spatial positioning of each vehicle along and remembering their exact appearance even after the model losing sight of the vehicle within a limited timeframe. This allows the system to track the movement of the and effectively flagging for any violation that requires movement tracking for cases of counter flow, illegal parking, and illegal turning. To prevent false positives, the system only flags the violation if the vehicle's wrong driving direction is sustained after a certain defined period, hence, ignoring the quick swerves in cases of avoiding potholes or road obstacles. This stage also tracks the vehicles path upon crossing the stop-line during red-light timer and flags it as red-light violation.

Stage 3: Automated License Plate Recognition and Alphanumeric Text Extraction

In this stage, the system will be translating the detected license plate zone into a much more machine-readable alphanumeric strings for vehicle identification logging. The cropped frame will first undergo under image preprocessing before optimal character recognition (OCR) to prevent unwanted results from poor quality frame resulting from severe motion blur or heavy video compression artifacts. This two-step process allows the system to effectively extract texts much more accurately by localizing first the plate number area, preventing any background noise which might in turn affect the accuracy of plate number alphanumeric character detection such as existing objects that contains texts like shop logos,

vehicle texts, and pedestrian signage. Lastly, upon successful extraction of text, the system will then merge the plate number identification with validated violation class and the results from persistent DeepSORT track ID, therefore, producing the complete legal non-contact apprehension of road violators which are logged as an evidence record in our administrative dashboard.

System Architecture And Dashboard Design

For this thesis project, a dashboard will be provided designed to help simplify the complex detection pipeline into a much more friendlier and easy to operate approach for our human operators. It will serve as the heart of our entire system where all of the processes will occur along with the necessary human intervention. The dashboard is capable of translating mathematically raw algorithmic outputs into something much more readable and verifiable evidences for ease of operation. The Traffic Officers which would validate and use this project should be able to easily understand and leverage these outputs upon actual deployment of the system, which leads us to building the system's user interface into three distinct functional areas: One will handle real-time monitoring, another will manage the logging of violation which is done automatically by the system, and the final area allows the operators to have their administrative review capabilities. A simplified version of the general data statistics and analytics page will also be provided for operators to have their insights regarding the information being outputted by the system and the statistical numbers of the road violations occurring.

Violation Detection Subsystem

This subsystem will give our operators the access to observe the software working in real time. It will process incoming video feeds from our raw footage taken from our specified sources and will immediately overlay visual metadata on the live screen for our targets. Every bounding boxes will be under visual hierarchy which are strictly color coded based on their violation severity for ease of distinct visual identification and distinguishing of violations by our operators. The display in the UI will also feature integrated label banners that explicitly shows the specific violation class along with the model's mathematical confidence score upon detection. A live status bar is also to be implemented to track the Frames Per Second (FPS) along with the active vehicle counts in each of our video frames. All of these is to aim for a smooth monitoring of our system's processes for any unwanted results, system lags, and unexpected issues that may hinder the effectiveness and efficiency of our system.

Vehicle Identification And Reecording Subsystem

Upon system detecting and confirms the violation for the physical attributes needed violation or the movement tracker violation, this would automatically be written in a database as a record, aiming for data integrity as our absolute priority during this process. This subsystem will follow a defined strict sequence to construct a valid legal log entry for our enforcers to validate. Firstly, the specific violation class and the exact millisecond timestamp will be noted down. Second, the alphanumeric plate number string extracted from our optical recognition engine

will be pulled for the records. In cases of environmental factors affecting the OCR engine to fail to identify the plate number, the system will mark it as "NO PLATE" into our database instead of a blank column box which may be verified by the enforcers. Although it may look like a software failure for our enforcers, it also, on the other hand, confirms explicitly that our system successfully did the optical check with our OCR model but hasn't found any readable texts or characters from the extracted cropped frames. Lastly, this subsystem will also map the vehicle's persistent track ID directly to the database record to ensure the logged violation connects precisely to the correct vehicle trajectory on the frame recorded.

Results Review Subsystem

This is the final area of our subsystems that would serve as a searchable archive feature for our project where the operators of the system can view every violation logged during the session run. A sorting and filtering features will be included for efficient look ups of records instead of scrolling through a long list of logged violations. This is feature or subsystem is also vital for identifying repeating "kamote" violators that habitually violates the Zamboanga's traffic laws. The operators can view the specific evidence frame; the specific moment the violation was flagged along with its tied metadata; and verify the record an apprehension notice will be issued to the violators. To abide and stay compliant with the Data Privacy Act (RA10173), we will implement the PII masking as a security protocol to prevent any raw, unasked footage to be extracted from the database; ensuring

only the masked visual evidences and plain text plate number characters are accessible to the authorized personnel.

Evaluation Metrics and Performance Benchmarking

The evaluation of HULI-KAMOTE will be based on our core question in this research: "How accurately does our system log and organize the violation in detects?" This is beyond with just checking if the detection models draw the correct boxes, identify the incorrect vehicle trajectory, extracting the plate number, rather, we measure the entire process by verifying if the system successfully converts our target video frames into an accurate database record. All records logged in the system must be complete and accurately linked for the data to be valuable.

With that, this study uses Precision and Recall to come up with an evaluation result on how well our model identifies road violations:

Precision helps us detect if our system is raising false positives. The higher the precision leads to us knowing that the flag is reliable and legally credible as false alarms or false positives results (an instance where the system flagged a violation but no violation/s has occurred) tend to result in a more burden manual review for the enforcers.

Recall helps us know if our model missed true violations (false negatives — an instance where the mode incorrectly flagged as no violation but violation does exist on that particular vehicle). A low recall score is an enforcement gap for

this study where the camera captured the violation but the model missed the detection.

Having these two parameters, we aggregate them into mean Average Precision (mAP@50)

As for our OCR character recognition, we will use **Character Error Rate (CER)** and **Word Error Rate (WER)** to test the accuracy of character extraction for our plate reading feature

Character Error Rate (CER) simply measures the accuracy at the character level whilst Word Error Rate (WER) treats the entire extracted plate string as one unit. WER is a crucial metric in this study as if a single character goes wrong, the identification might be pointed out to the wrong vehicle plate number which will result in ticketing innocent drivers.

Logging and Organizational Accuracy Rate (LOAR)

LOAR is the primary system-level benchmark of this study as it measures the proportion of violation events that happens to have been correctly recorded in our database from our total number of actual violations that the AI caught in the video. LOAR is designed to be strict in purpose by only counting the correct the records if and only if the violation type, the track ID, and the plate number character string all match at the same time. Each of the components may work as fine as they are independent based on what stage they are in, however, LOAR exposes

the final call regarding the existence of integration failures. This metric ensures that only the records with quality of evidence can pass within the system detection.

Testing and Evaluation

We will test the HULI-KAMOTE using two distinct layers: We will perform first a Technical Simulation Benchmarking by running our system against an evaluation set of annotated video frame footage we have on hand where it could provide a fair and reliable measure of the system's accuracy in detecting traffic violations under different environmental conditions. In this layer, the LOAR is only as reliable as our own manually annotated collection of frames.

The next layer is where the actual enforcements come in play which is the Third-Party Expert Validation. We will be working with the Land Transportation Office (LTO) personnel in this phase. They will be watching real-time detections happening from our system's dashboard and examine the complete records afterward. Using their authority, they are to come up with a verdict if our software is ready for the road deployment. Our evaluators will be completing a standardized form that generally targets the parameters such as the FURPS which stands for function Functionality, Usability, Reliability, Performance and Supportability. With their professional assistance, we can verify if our logs would accurately support a non-contact apprehension of road violations under the current LTO workflows.

Evaluation Criteria for Expert Validation

Criterion A - Functionality and Detection Accuracy: This criterion shall cover our detection for missing helmets, overloading passengers, missing plate numbers and alongside with other violations movement-based violations. The LTO officers will help us confirm if our software accurately isolated these evens as accurate as how a human enforcer would in actual road conditions using their authorities.

Criterion B - Reliability and Performance: This criterion will be added to measure our system's processing speed even under heavy occlusion instances where traffic gets heavy. We also would ask our experts to check if our error rates are acceptably low in preparation for deployment.

Criterion C - Usability of the Dashboard: In this criterion, we check if the user interface is simple and easy enough to interpret for the enforcers even without technical background. We will also evaluate in this criterion whether or not the evidence frames and the timestamp provided are sufficient information for documentation purposes without having the need for manual audit.

Criterion D - Evidentiary and Enforcement Value: Our evaluators will be using this section to decide if our captured video frames and plate number string characters provides proof that is required for non-contact apprehension. We will also ask them in this category to verify our logging methodology if it is compatible with the current LTO enforcement workflow

Criterion E - Data Privacy and Security: This criterion will evaluate our Data Privacy protocols and our efforts to handle Personally identifiable Information (PII) correctly. We will show to our evaluators regarding the automated face blurring and plate number masking processes along with the strict guard of mandatory censoring of footages before extraction.

Criterion F - Overall Acceptability: the final section of our evaluation will be the generally verdict of the system's potential. Our main goal is to verify if our HULI-KAMOTE is truly ready for real-time deployment. We will ask our evaluators to weigh everything they encountered within our system—along with the technical limitations—to come up with a conclusion with their expertise whether or not this tool is viable and usable for future automated non-contact apprehension of traffic violation enforcement Zamboanga City

Statistical Analysis and Analytical Approach

To process scores from our LTO evaluation forms gathered from our evaluators, we will be utilizing a structured statistical approach. This ensures that the Likert Scale ratings for instance that are given to the experts will be translated into clear and actionable conclusions for each criterion. This approach helps us make our subjective feedback forms as objective as possible through aggregating these scores and ensure that we can mathematically prove whether HULI-KAMOTE is viable for standards required for actual deployment.

Weighted Mean Computation

Every single item and criterion-level scores will be using the Weighted Mean, which mainly accounts for how each of the individual ratings are distributed across all response categories instead of treating them as equal contribution in a flat average

Descriptive Interpretation Intervals

Table 4: Range of Mean Scores and Qualitative Interpretations for the Four-Point Likert Scale

Weighted Mean Range	Qualitative Descriptor	Operational Interpretation
3.50 – 4.00	Highly Acceptable	Fully meets enforcement and operational standards in this criterion, no modification required. Suitable for deployment consideration or a live piloting phase.
2.50 - 3.49	Acceptable with Minor Revisions	Meets the core standard but has specific, addressable gaps that should be fixed before formal deployment. Revisions are incremental.
1.50 - 2.49	Acceptable with Major Revisions	Shows sufficient foundational capability but needs substantial redesign of one or more components before it's operationally suitable. Cannot pass without significant further development.
1.00 - 1.49	Not Acceptable	Does not meet the minimum operational standard in its current form. Needs a fundamental rethink of the approach for this criterion before re-evaluation.

These intervals will be applied uniformly throughout every criterion along with the acceptability score from Criterion F. In cases where any of the criterion scoring below 3.50, this becomes an action item for the researchers for the post-

evaluation development cycle, taking account of the evaluations' feedback which serves as the primary guideline for our targeted improvement.

Ethical Considerations and Data Anonymization

Having the real-world video CCTV footage from Zamboanga City means the researchers are responsible for the data privacy of every person and vehicle on each of the frames we acquired from raw footages. Republic Act 10173 is the ground basis for our data policy, and due to the fact that license plates and faces are Personally Identifiable Information (PII), the system will be employing strict protocols within its workflow from the very initial stages.

Institutional Data Request and Consent

Acquiring CCTV footage from the Office of the Punong Barangay of Baliwasan will only happen after the formal signing agreements of data-sharing process. These agreements shall act as our legal binding contract which specifies which exactly data we will be utilizing for our system, training our models, and testing, who from among our team will have access to the encrypted storage, and how are we going to handle the discarding and destroying of the footage within thirty days of our final evaluation. This request letter is treated as an opportunity to build local trust with the Barangay by explaining our data privacy protocols in the early stages all set up and ready for the entire duration of the study.

Mandatory Anonymization Loop

HULI-KAMOTE uses a mandatory PII masking feature that serves as the safety protocol of guard-wall for our database. There shall be no raw, unmasked video frame that ever enters our persistent archive by ensuring that every face detected in the footage and every license plate for non violators will have Gaussian Blurring applied upon them and have their PII protected. The only downside here would be the human error, hence, we must secure thoroughly that our scripts run effectively every single session to prevent unwanted results of failing to blur faces and saved to the database as a mistake. This protocol also ensures that the people outside of this study which are included like the by standers will have their PII also protected.

CHAPTER IV

RESULTS AND DISCUSSION

CHAPTER V

CONCLUSION AND RECOMMENDATIONS

Conclusion

Recommendations

References

[1] D. Dede, M. A. Sarsıl, O. Altıntaş, A. Shaker, and O. Ergen, "Next-gen traffic surveillance: AI-assisted mobile traffic violation detection system," arXiv preprint arXiv:2311.16179v1, Nov. 2023.

[2] C. S. Ong, T. Connie, and M. K. O. Goh, "Traffic Violation Detection Using Computer Vision Techniques," *JOIV: Int. J. Inform. Visualization*, vol. 8, no. 3-2, pp. 1515-1527, Nov. 2024.

[3] R. Ke, C. Liu, H. Yang, W. Sun, and Y. Wang, "Real-Time Traffic and Road Surveillance With Parallel Edge Intelligence," *IEEE J. Radio Freq. Identif.*, vol. 6, pp. 693-696, 2022.

[4] O. R. Polu, "AI-powered traffic violation detection using CCTV footage," *International Journal of Science and Research (IJSR)*, vol. 13, no. 3, pp. 1956–1961, Mar. 2024, doi: 10.21275/SR24038113847.

[5] N. V. HO, A. Agarwal, and M. Moharir, "A Novel AI-Driven System for Real-Time Detection of Mirror Absence, Helmet Non-Compliance, and License Plates Using YOLOv8 and OCR," in *Proc. 12th Int. Conf. Emerging Trends Eng. Technol. Signal Inf. Process. (ICETET SIP)*, Nov. 2025, pp. 1-6, arXiv:2511.12206v1 [cs.CV].

[6] J. P. Q. Tomas and B. T. Doma, "Motorcycle Helmet Detection and Usage Classification in the Philippines using YOLOv5 Algorithm," in *Proc. 5th Int. Conf. Comput. Intell. Intell. Syst. (CIIS)*, Nov. 2022, pp. 21–25, doi: 10.1145/3581792.3581796.

[7] S. Bose, M. H. Kolekar, S. Nawale, and D. Khut, "LoLTV: A Low Light Two-Wheeler Violation Dataset With Anomaly Detection Technique," *IEEE Access*, vol. 11, pp. 124951-124961, 2023, doi: 10.1109/ACCESS.2023.3329737.

[8] U. U. Deshpande *et al.*, "Computer-vision based automatic rider helmet violation detection and vehicle identification in Indian smart city scenarios using NVIDIA TAO toolkit and YOLOv8," *Front. Artif. Intell.*, vol. 8, art. no. 1582257, Jul. 2025, doi: 10.3389/frai.2025.1582257.

[9] T. Jin, X. Ye, Z. Li, and Z. Huo, "Identification and Tracking of Vehicles between Multiple Cameras on Bridges Using a YOLOv4 and OSNet-Based Method," *Sensors*, vol. 23, no. 12, p. 5510, Jun. 2023, doi: 10.3390/s23125510.

[10] M. Manoj, M. A. S, M. N. Y, S. K, Mohana, and R. K. P, "Vehicle Detection, Counting and Classification using YOLOv8 Deep Learning Model and OpenCV for Urban Traffic Management System," in *Proceedings of the 9th International Conference on Communication and Electronics Systems (ICCES)*, Bengaluru, India, 2024, pp. 2085-2090, doi: 10.1109/ICCES63552.2024.10860266.

[11] L. Tao, S. Hong, Y. Lin, Y. Chen, P. He, and Z. Tie, "A Real-Time License Plate Detection and Recognition Model in Unconstrained Scenarios," *Sensors*, vol. 24, no. 9, p. 2791, Apr. 2024. DOI: 10.3390/s24092791.

[12] A. Aboah, B. Wang, Y. Adu-Gyamfi, and U. Bagci, "Real-time Multi-Class Helmet Violation Detection Using Few-Shot Data Sampling Technique and YOLOv8," in *arXiv preprint arXiv:2304.08256*, Apr. 2023.

[13] J. Liu, Y. Xie, Y. Zhang, and H. Li, "Vehicle Flow Detection and Tracking Based on an Improved YOLOv8n and ByteTrack Framework," *World Electric Vehicle Journal*, vol. 16, no. 1, p. 13, Dec. 2024, doi: 10.3390/wevj16010013.

[14] Y. Zhao, C. Ren, S. Zhao, J. Yao, X. Li, and M. Wang, "Study of Multi-Objective Tracking Method to Extract Multi-Vehicle Motion Tracking State in Dynamic Weighing Region," *Sensors*, vol. 25, no. 10, p. 3105, May 2025. doi: 10.3390/s25103105.

[15] P. Sodegaonkar and R. A. Khan, "Vehicle Detection and Tracking using EfficientDet and BoT-SORT," *International Journal for Research in Applied Science and Engineering Technology (IJRASET)*, vol. 14, no. 4, pp. 4846-4854, Apr. 2026. Available: https://doi.org/10.22214/ijraset.2026.80273.

[16] A. El-alami, Y. Nadir, and K. Mansouri, "A Modified Lightweight DeepSORT Variant for Vehicle Tracking," *(IJACSA) International Journal of Advanced Computer Science and Applications*, vol. 15, no. 10, pp. 658-664, 2024.

[17] Z. Ma, C. Chen, J. Chen, and Y. Jiang, "STC-SORT: A Dynamic Spatio-Temporal Consistency Framework for Multi-Object Tracking in UAV Videos," *Applied Sciences*, vol. 16, no. 2, p. 1062, Jan. 2026, doi: 10.3390/app16021062.

[18] B. Satya, D. Manongga, Hendry, and A. Aminuddin, "Optimized YOLOv8 for Automatic License Plate Recognition on Resource Constrained Devices," *Engineering, Technology & Applied Science Research*, vol. 15, no. 2, pp. 21976–21981, Apr. 2025, doi: 10.48084/etasr.9983.

[19] S. Ranjbar Alvar, K. Uyanik, and I. V. Bajić, "License Plate Privacy in Collaborative Visual Analysis of Traffic Scenes," arXiv preprint arXiv:2205.01724v1, May 2022.

Appendix A: Data Collected

The letter below is being prepared for submission to the Office of the Punong Barangay of Barangay Baliwasan, Zamboanga City, to formally request traffic footage for use in this study. The request is part of the data collection process, which was ongoing at the time of writing. The researchers are also pursuing the MMDA request through the eFOI Portal and CARLA-generated footage as additional sources in case institutional footage becomes unavailable.

Western Mindanao State University
College of Computing Studies
DEPARTMENT OF COMPUTER SCIENCE
Zamboanga City

June 19, 2026

HON. MA. JAMIELY CZARINA N. CABATO
Punong Barangay / Barangay Captain
MR. MICHAEL GREGORIO
Barangay Secretary
Office of the Punong Barangay
Barangay Hall, Barangay Baliwasan
Zamboanga City

SUBJECT: FORMAL REQUEST FOR ACCESS TO CCTV FOOTAGE — ACADEMIC RESEARCH

Dear Madam/Sir:

We, the undersigned undergraduate researchers from Western Mindanao State University, respectfully submit this letter in connection with our ongoing thesis project. Under the guidance of our thesis adviser, we are reaching out directly to Barangay Baliwasan, as your closed-circuit television (CCTV) infrastructure holds the specific footage necessary to complete our study.

Our thesis is formally titled:

"HULI-KAMOTE: Camera-Based Multi-Violation Detection and Non-Contact Apprehension System for Urban Traffic Enforcement in Zamboanga City"

The study aims to develop a computer vision-based traffic violation detection system capable of identifying common road violations — including counterflow driving, illegal turning, helmet non-compliance, overloading, and missing side mirrors — using artificial intelligence technologies such as YOLOv8 object detection, DeepSORT multi-object tracking, and EasyOCR for license plate recognition. The system is designed to operate in a simulation-based environment and is intended solely for academic demonstration and evaluation.

In this regard, we humbly request permission **to obtain pre-recorded CCTV footage** from cameras maintained by Barangay Baliwasan. Specifically, we are requesting access to available footage **regardless of specific dates of recording**, as our primary objective is not to document particular incidents, but rather to capture representative, non-incident-specific structural traffic flows that will serve as the basis for our simulation calibration and model validation. We fully acknowledge that such video records are expected to be significantly large in file size, and we wish to assure your office that our research team has already prepared the necessary high-capacity storage infrastructure to accommodate large data volumes, ensuring that no strain or burden will be placed upon the barangay's own data systems or storage resources.

The footage shall be used exclusively for the following academic purposes:

Respectfully submitted,

Jehana H. Kairan
Lead Researcher
Contact Number: 0936-822-1243
Email Address: kairanjehana@gmail.com

Emman Nicholas Blabe B. Idulsa
Co-Researcher

Fatima Sheena Sharifa T. Abubakar
Co-Researcher

Noted By:


JAYDEE C. BALLAHO, MIT
Thesis Instructor
Head, Computer Science Department


MARK L. FLORES, PhD
Dean, College of Computing Studies

1091


Appendix B: System Design




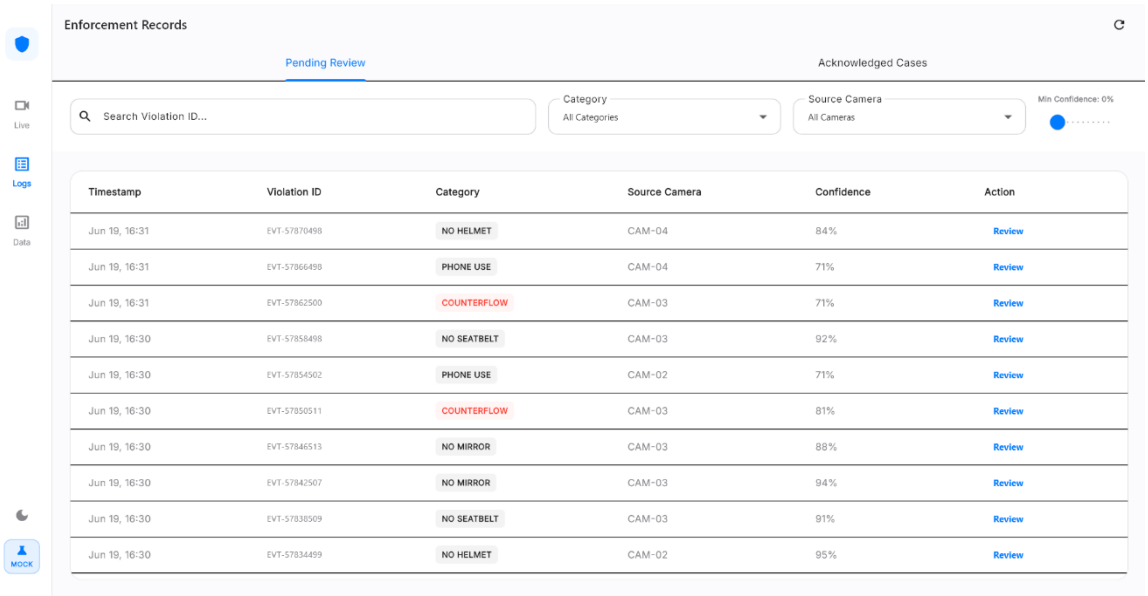

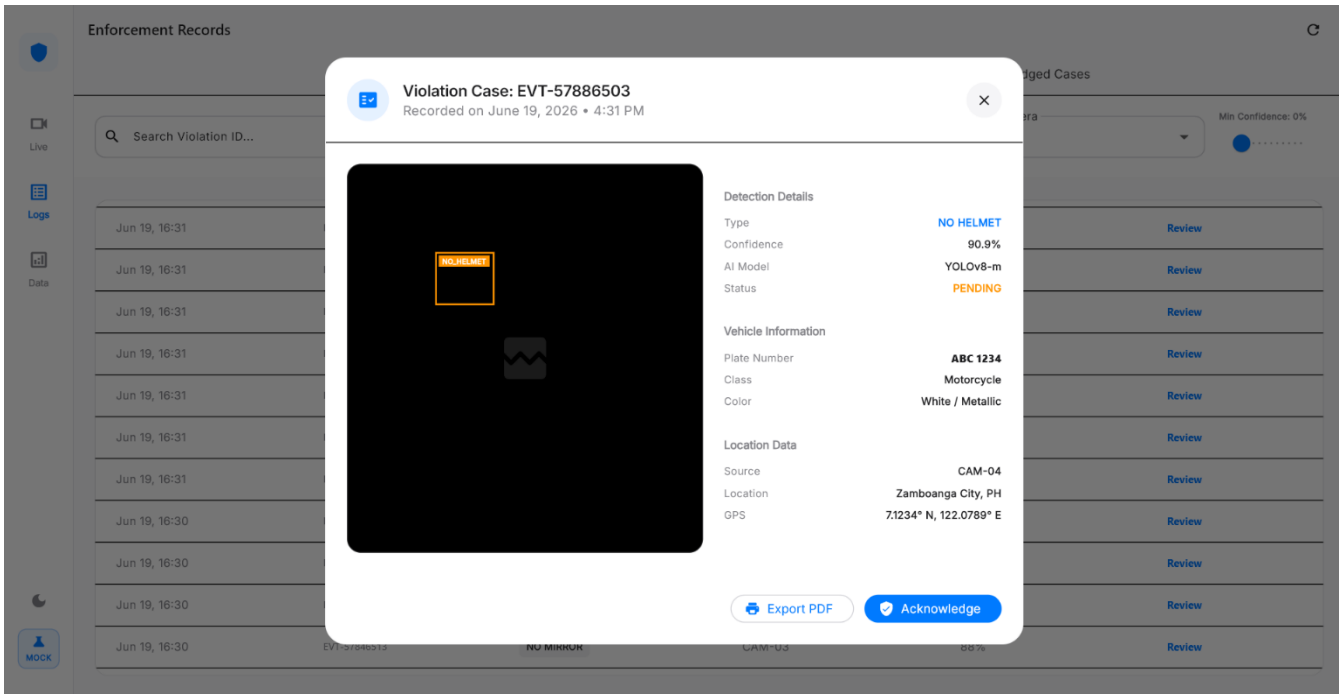
Enforcement Records
Search Violation ID...
Violation Case: EVT-57886503
Recorded on June 19, 2026 • 4:31 PM
NO_HELMET
Detection Details
Type NO HELMET
Confidence 90.9%
AI Model YOLOv8-m
Status PENDING
Vehicle Information
Plate Number ABC 1234
Class Motorcycle
Color White / Metallic
Location Data
Source CAM-04
Location Zamboanga City, PH
GPS 7.1234° N, 122.0789° E
Export PDF
Acknowledge
Review
MOCK

1094

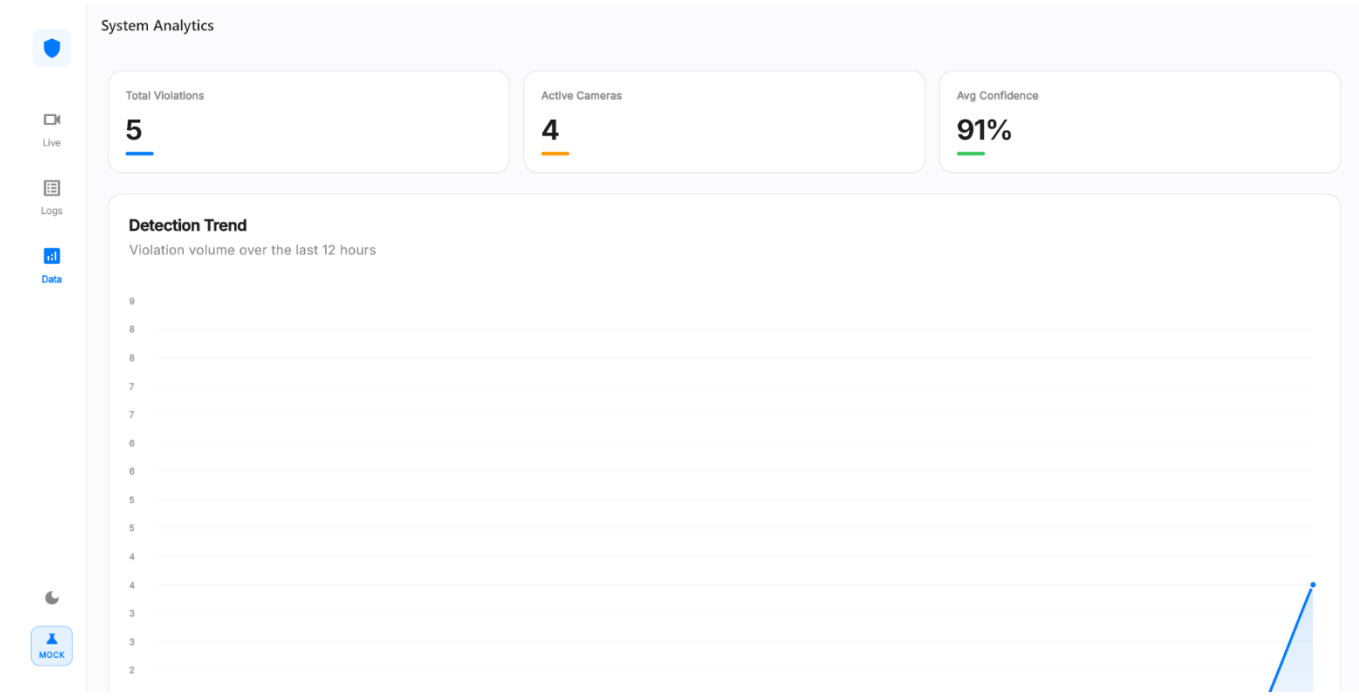
System Analytics
Total Violations
5
Active Cameras
4
Avg Confidence
91%
Detection Trend
Violation volume over the last 12 hours
Live
Logs
Data
MOCK

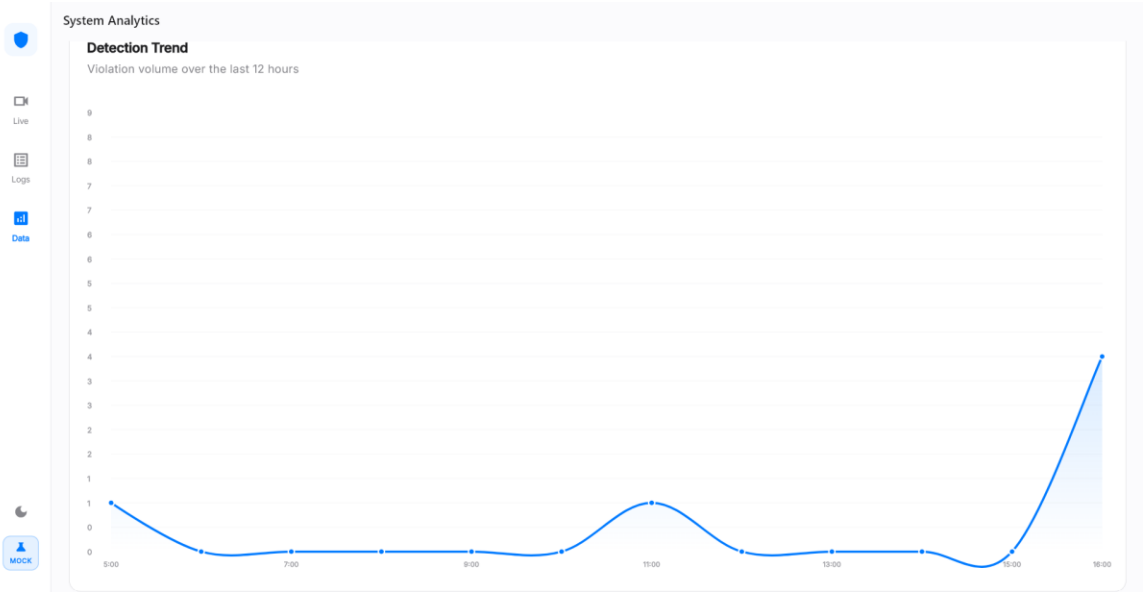
System Analytics
Detection Trend
Violation volume over the last 12 hours
Live
Logs
Data
MOCK
9
8
8
7
7
6
6
5
5
4
4
3
3
2
2
1
1
0
0
5:00
7:00
9:00
11:00
13:00
15:00
16:00

Appendix C: Evaluation Tool




Western Mindanao State University
College of Computing Studies
DEPARTMENT OF COMPUTER SCIENCE
Zamboanga City




SYSTEM EVALUATION FORM

FURPS Criteria and System Usability Scale (SUS)

(For Land Transportation Office Evaluators)

Date: _____

Research Title:	HULI-KAMOTE: Camera-Based Multi-Violation Detection and Non-Contact Apprehension System for Urban Traffic Enforcement in Zamboanga City
Proponents:	Emman Nicholas Blabe B. Idulsa, Jehana H. Kairan, Fatima Sheena Sharifa T. Abubakar
Main Objective:	
Venue/Site of Testing:	

Evaluator's Profile

Name:	
Position/Designation:	
Office/Station:	
Years in Service:	

This form is intended to gather the assessment of Land Transportation Office (LTO) personnel regarding the HULI-KAMOTE system, based on its simulated testing and demonstration. It is composed of two parts: Part I evaluates the system using the FURPS model (Functionality, Usability, Reliability, Performance, and Supportability), and Part II evaluates the system's perceived usability using the System Usability Scale (SUS). Kindly answer both parts as honestly and objectively as possible, as your assessment will be used to validate and further improve the system.

Part I. FURPS Evaluation

Rate each item using the scale below:

4 = Highly Acceptable 3 = Acceptable 2 = Needs Revision 1 = Not Acceptable

Criteria	Rating
F – Functionality	
The system accurately detects helmet non-compliance among motorcycle riders.	

Criteria	Rating
The system accurately detects other defined violations (e.g., missing side mirror, counterflow driving, illegal turning, passenger overloading).	
The system correctly reads and records the license plate of the vehicle involved in a detected violation.	
The captured evidence (frame, plate number, and violation details) would be sufficient to support a non-contact citation, similar to existing no-contact apprehension programs.	
U – Usability	
The administrative dashboard is easy to navigate and understand.	
Violation logs and captured evidence frames are presented clearly and are easy to interpret.	
The information displayed (timestamp, plate number, violation type, and evidence frame) is sufficient for documentation purposes.	
R – Reliability	
The simulated violations and results presented are realistic and representative of actual road and traffic conditions.	
The system performs consistently across the different simulated lighting and traffic conditions shown.	
The rate of false detections (false positives or false negatives) observed is within an acceptable level.	
P – Performance	
The system processes video footage and produces results within a reasonable amount of time.	
S – Supportability	
The handling of captured footage (e.g., faces, plate numbers) shows adequate consideration for data privacy.	
Access to the dashboard and violation records appears properly restricted and secured.	
The system's logging and recording method appears suitable for integration into the office's enforcement workflow.	
Overall Acceptability	
Overall, the system shows strong potential as a tool for future automated, non-contact traffic enforcement in Zamboanga City.	

Overall Recommendation

1102

Western Mindanao State University
College of Computing Studies
DEPARTMENT OF COMPUTER SCIENCE
Zamboanga City

☐ Highly Acceptable for Enforcement Use ☐ Acceptable with Minor Revisions

☐ Acceptable with Major Revisions ☐ Not Acceptable

Part II. System Usability Scale (SUS)

For each statement below, please encircle or mark the number that best reflects how strongly you agree or disagree, using the 5-point scale from Strongly Disagree (1) to Strongly Agree (5). Kindly respond to every item, even if you are not entirely certain of your answer.

No.	Statement	1 (Strongly Disagree)	2	3	4	5 (Strongly Agree)
1	I think that I would like to use this system frequently.	○	○	○	○	○
2	I found the system unnecessarily complex.	○	○	○	○	○
3	I thought the system was easy to use.	○	○	○	○	○
4	I think that I would need the support of a technical person to be able to use this system.	○	○	○	○	○
5	I found the various functions in this system were well integrated.	○	○	○	○	○
6	I thought there was too much inconsistency in this system.	○	○	○	○	○
7	I would imagine that most people would learn to use this system very quickly.	○	○	○	○	○
8	I found the system very cumbersome to use.	○	○	○	○	○
9	I felt very confident using the system.	○	○	○	○	○
10	I needed to learn a lot of things before I could get going with this system.	○	○	○	○	○

Additional Comments/Suggestions:

1103

Evaluated by:

Name:
Signature:

Prepared By:

EMMAN NICHOLAS BLABE B. IDULSA
JEHANA H. KAIRAN
FATIMA SHEENA SHARIFA T. ABUBAKAR
Researchers

Noted By:

JAYDEE C. BALLAHO, MIT
Thesis Instructor
Head, Computer Science Department


MARK L. FLORES, PhD
Dean, College of Computing Studies

1104

Appendix D: Relevant Source Code

Appendix E: Ethical Clearance

Appendix F: Plagiarism Report

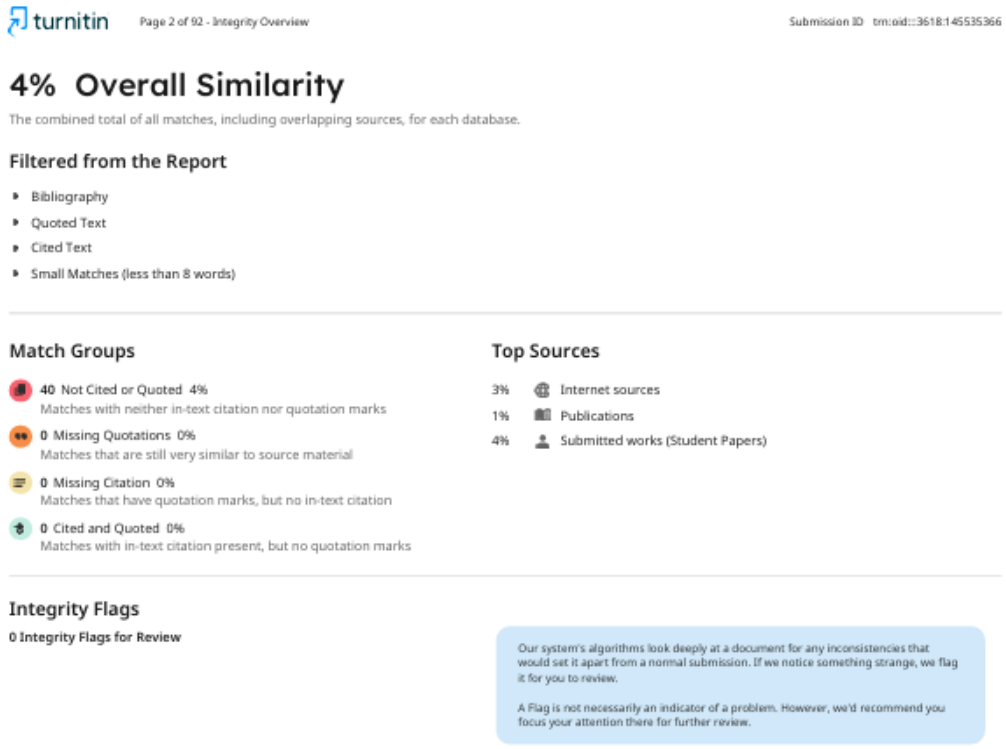

turnitin Page 2 of 92 - Integrity Overview Submission ID trn:oid:::3618:145535366

4% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Filtered from the Report

- Bibliography
- Quoted Text
- Cited Text
- Small Matches (less than 8 words)

Match Groups

- 40 Not Cited or Quoted 4%
  Matches with neither in-text citation nor quotation marks
- 0 Missing Quotations 0%
  Matches that are still very similar to source material
- 0 Missing Citation 0%
  Matches that have quotation marks, but no in-text citation
- 0 Cited and Quoted 0%
  Matches with in-text citation present, but no quotation marks

Top Sources

3% Internet sources
1% Publications
4% Submitted works (Student Papers)

Integrity Flags

0 Integrity Flags for Review

Our system's algorithms look deeply at a document for any inconsistencies that would set it apart from a normal submission. If we notice something strange, we flag it for you to review.

A Flag is not necessarily an indicator of a problem. However, we'd recommend you focus your attention there for further review.

turnitin Page 2 of 92 - Integrity Overview Submission ID trn:oid:::3618:145535366

Appendix G: Research Critique and Editing Certificate

Appendix H: Curriculum Vitae



JEHANA H. KAIRAN

Sitio Caragasan, Brgy. Maasin, Zamboanga City
0936 822 1243
kairanjehana@gmail.com
October 30, 2002

A dedicated and detail-oriented 4th-year Computer Science student at Western Mindanao State University currently undertaking a thesis on "HULI-KAMOTE: Camera-Based Multi-Violation Detection and Non-Contact Apprehension System for Urban Traffic Enforcement in Zamboanga City." Specializing in project conceptualization, system analysis, and technical documentation, eager to contribute to concept planning, UI/UX design, and technical development projects.

EDUCATION BACKGROUND

Tertiary	: **Western Mindanao State University** Bachelor of Science in Computer Science Normal Road, Baliwasan, Zamboanga City *2023 – Present*
Secondary (SHS)	: **Ayala National High School** *Information and Communications Technology (ICT)* Zone 6, Ayala , Zamboanga City, Philippines *2021 - 2023*
Secondary (JHS)	: **Ayala National High School** Zone 6, Ayala , Zamboanga City, Philippines *2015 - 2021*
Elementary	: **Maasin Learning Center e-Impact School** Maasin, Zamboanga City, Philippines *2013 - 2015* : **Labuan Central School** Labuan, Zamboanga City, Philippines *2009 - 2013*

TECHNICAL SKILLS

- Programming Languages: PHP, Python, JavaScript
- Web Development: HTML, CSS, Bootstrap
- Database Management: MySQL, Firebase
- Software Development: FlutterFlow
- UI/UX Tools: Figma, Wireframing
- Graphic Designing

ACADEMIC & GROUP PROJECTS

Project SchedScan *(Group Project — Concept Originator & System Analyst)*
- Originated the OCR mobile schedule scanner concept, designed screen layouts and UI/UX flows, and defined core system requirements for development.

PureSort IoT: Intelligent Waste Analytics & Automated Segregation *(Group Project — IoT Integration Strategist & System Analyst)*
- Strategized the IoT system enhancement, assembled and wired all circuit connections, planned ESP32 sensor logic, and structured specifications for automated waste segregation.

Pet Salon Management System *(Academic Project — System Analyst & Developer)*
- Conceptualized, designed, and deployed a database-driven system prototype to streamline pet grooming appointments, customer records, and service pricing packages.



EMMAN NICHOLAS BLABE IDULSA

Software Developer / Full-Stack Developer

Putik, Zamboanga City
+63 975 950 1214 / +63 993 355 6320
idulsa.emmannicholas@gmail.com
December 17, 2003

A Software Developer with experience in full-stack web development, UI/UX design, and AI integration. Graduate of an Associate Degree in Computer Technology (Major in Application Development) at Western Mindanao State University, specializing in building modern, practical, and user-centered digital applications.

EDUCATION

Tertiary : Western Mindanao State University – Integrated Laboratory School
Associate Degree in Computer Technology (Major in Application Development)
2023 – 2025

Secondary (SHS) : Claret School of Zamboanga City
STEM Track — Academic Achiever
2020 – 2022

Secondary (JHS) : Vitali National High School
Academic Achiever
2016 – 2020

TECHNICAL SKILLS

- Frontend & UI/UX : Next.js, React.js, Tailwind CSS, Bootstrap, HTML, CSS, Figma Prototyping
- Backend & Database : Node.js, Django, PHP, Firebase, Supabase, MySQL, phpMyAdmin
- Languages & Tools : JavaScript, TypeScript, Python, C++, Git, GitHub, Flutter, FlutterFlow
- AI & Integration : Prompt Engineering, AI Model Integration, Model Training & Deployment (Colab, Jupyter)

PERSONAL & ACADEMIC PROJECTS

LNSC Commerce
- Built a modern full-stack eCommerce platform featuring product browsing, smart search, cart/checkout, user authentication, and admin functionality using Next.js, React, TypeScript, and Tailwind CSS

BookCoup
- Developed a full-stack Next.js library management system with role-based access, dynamic book ID generation, borrowing constraints, and user/admin dashboards

PromptEAT
- Created an open-source prompt library platform designed to encode, adapt, and transform ideas into structured AI interactions using Next.js and Tailwind CSS

VAWC Portal — WMSU | DILG
- Built a Django-powered web portal for reporting and managing Violence Against Women and Children (VAWC) cases using Bootstrap and JavaScript

Items Crudified
- Developed a Django-based item management system featuring full CRUD capabilities for inventory tracking

GWA Calculator and Dean's List Qualification System
- Built a PHP-powered web tool to compute GPA/GWA and evaluate Dean's List eligibility for WMSU College of Computing Studies students

1116



FATIMA SHEENA SHARIFA ABUBAKAR

Web Developer

C-1078, Colt Dr., Lower Calarian, Zamboanga City
0938 078 9522
fsheenaabubakar@gmail.com
February 15, 2005

A dedicated and detail-oriented **4th-year Computer Science student** currently undertaking a thesis on **"HULI-KAMOTE: Camera-Based Multi-Violation Detection and Non-Contact Apprehension System for Urban Traffic Enforcement in Zamboanga City,"** eager to apply technical and analytical skills in a professional setting. Seeking an internship opportunity to contribute to technical and development projects while gaining hands-on industry experience.

EDUCATION

Secondary (SHS)	: Science, Technology, Engineering and Mathematics (STEM) Western Mindanao State University – Integrated Laboratory School Normal Road, Baliwasan, Zamboanga City June 2022 – March 2023
Secondary (JHS)	: Western Mindanao State University – Integrated Laboratory School Normal Road, Baliwasan, Zamboanga City June 2018 – March 2021
Elementary	: Western Mindanao State University – Integrated Laboratory School Normal Road, Baliwasan, Zamboanga City June 2012 – March 2017

TECHNICAL SKILLS

- Programming Languages: PHP, Python, JavaScript
- Web Development: HTML, CSS, Bootstrap
- Software Development: FlutterFlow
- UI/UX Tools: Figma, Wireframing

PERSONAL & ACADEMIC PROJECTS

CashCourse *(Financial Management Platform for Students)*

- Developed a gamified quiz system and expense tracker for students.
- Designed UI using FlutterFlow and implemented Firebase for data storage.

Senior Citizens Information System *(Software Engineering Project)*

- Built a records management system for the Office of Senior Citizens Affairs (OSCA) in Zamboanga City to manage senior citizen records, ID issuance, and benefits tracking.
- Digitized and streamlined previously manual record-keeping processes for OSCA staff.

PureSort IoT: Intelligent Waste Analytics & Automated Segregation *(Embedded Systems Project)*

- Built a hardware-based IoT system that automatically sorts waste into wet and dry categories using sensor-driven detection.
- Designed and integrated embedded hardware components with automated classification logic to reduce manual waste sorting.
- Applied embedded systems and IoT principles to develop a functional waste analytics and segregation prototype.

1117

1118

1119

1120

1121

1122

1123

1124

1125

1126

1127

1128

1129

1130

1131

1132

1133

1134

1135

Appendix I: Informed Consent

WESTERN MINDANAO STATE UNIVERSITY
College of Computing Studies
Department of Computer Science
Zamboanga City, 7000, Philippines

HULI-KAMOTE: CAMERA-BASED MULTI-VIOLATION DETECTION AND NON-CONTACT APPREHENSION SYSTEM FOR URBAN TRAFFIC ENFORCEMENT IN ZAMBOANGA CITY

INFORMED CONSENT

Purpose of the study

This study aims to develop and evaluate HULI-KAMOTE, a computer vision-based prototype system that automatically detects selected traffic and driving violations (such as no helmet, no side mirror, overloading, counterflow, illegal turning, illegal parking, disregarding traffic signs, and no visible license plate) from pre-recorded and simulated video footage, and organizes the results into a local, offline dashboard for review. As part of this study, you are being invited to take part in the system's evaluation phase, wherein you will observe a live demonstration of HULI-KAMOTE and provide your professional assessment, as a Land Transportation Office (LTO) personnel or traffic enforcer, of the system's functionality, usability, reliability, performance, and its overall potential for future non-contact traffic enforcement in Zamboanga City.

Procedures to be carried out

If you agree to take part in this study, you will be asked to: (1) attend and observe a live demonstration of the HULI-KAMOTE Admin Dashboard using pre-recorded and controlled/simulated traffic video footage; (2) explore and interact with the system's violation detection, logging, and case review features; (3) accomplish a System Evaluation Form composed of the FURPS criteria (Functionality, Usability, Reliability, Performance, and Supportability) and the System Usability Scale (SUS); and (4) optionally share verbal comments or

suggestions regarding the system's readiness for future use. No actual road deployment, live public surveillance, or use of your feedback for real enforcement will take place; the entire demonstration and evaluation will be conducted strictly within a controlled, offline simulation setting.

Extent of confidentiality

All information you provide, including your name, position/designation, office/station, and years in service, will be treated with strict confidentiality and will be used only for documenting the profile and qualifications of the evaluators of this study. Your individual ratings and comments will be combined with those of the other evaluators and reported only in summarized or aggregated form in the thesis manuscript. You may choose to withhold your name on the evaluation form should you prefer anonymity. This study complies with the Data Privacy Act of 2012 (Republic Act No. 10173), and no personally identifiable information will be disclosed to any third party without your consent.

Expected duration of participation

Your participation will involve a single session lasting approximately thirty (30) to sixty (60) minutes, covering the live demonstration of the system and the completion of the System Evaluation Form.

Benefits to the participants

There is no direct monetary benefit for participating in this study. However, your participation and expert feedback will help determine whether an automated, non-contact traffic violation detection tool such as HULI-KAMOTE can realistically support the day-to-day work of LTO personnel and traffic enforcers in Zamboanga City, particularly in areas or situations where manual monitoring is limited. Your insights will also directly inform future improvements to the system.

Mechanisms in cases of discomforts and risks

This study involves minimal risk, as your participation only requires observing a software demonstration and accomplishing an evaluation form; it does not involve any physical activity, actual field deployment, or exposure to live surveillance of real individuals. Should you feel any discomfort, or wish to pause or stop at any point during the demonstration or evaluation, you may inform the researchers immediately, and your request will be respected without question or consequence.

Compensations/reimbursement of expenses

No monetary compensation will be provided for your participation. However, light refreshments or a small token of appreciation may be given during the session, and a certificate of appreciation will be issued to acknowledge your time and contribution to this research.

Duties and responsibilities of participants

You are kindly requested to attend the scheduled demonstration, observe the system's operation attentively, and accomplish the System Evaluation Form honestly and objectively based on your professional knowledge and experience in traffic enforcement. You are also welcome, though not obligated, to provide additional comments or suggestions that may help the researchers improve the system.

Adequate process for ensuring that consent is voluntary

Prior to the demonstration, the researchers will explain the purpose, procedures, and your rights as a participant in this study in a language and manner that you can clearly understand. You will be given ample opportunity to ask questions and clarify any concerns before deciding whether to take part. Your signature on this form signifies that you are participating out of your own free will, without any form of pressure, coercion, or inducement.

Withdrawal of participants from the study anytime without penalty

Your participation in this study is completely voluntary. You may decline to participate, or withdraw at any point during the demonstration or evaluation, for any reason, without any penalty and without it affecting your standing, duties, or relationship with your office or agency, or with Western Mindanao State University.

Contact person

If you have questions regarding this paper, you may reach out through the researchers:

Jehana H. Kairan
Lead Researcher
Contact No. 0936-822-1243
Email: kairanjehana@gmail.com

Emman Nicholas Blabe B. Idulsa
Co-Researcher
Contact No. 0975-950-1214
Email: idulsa.emmannicholas@gmail.com

Fatima Sheena Sharifa T. Abubakar
Co-Researcher
Contact No. 0936-078-9522
Email: fsheenaabubakar@gmail.com

For questions related to research ethics, please contact the **Research Ethics Office (REO)** at **reoc@wmsu.edu.ph**

I hereby affirm that I have understood the nature and scope of this study and freely agree to participate.

_____

Name (Optional) and Signature of the Participant

Date: _____

Respectfully Endorsed:

_____
Jehana H. Kairan

_____
Emman Nicholas Blabe B. Idulsa

_____
Fatima Sheena Sharifa T. Abubakar
Date: _____