


Gloria

Make your home beautiful

Solid
Surface
Material

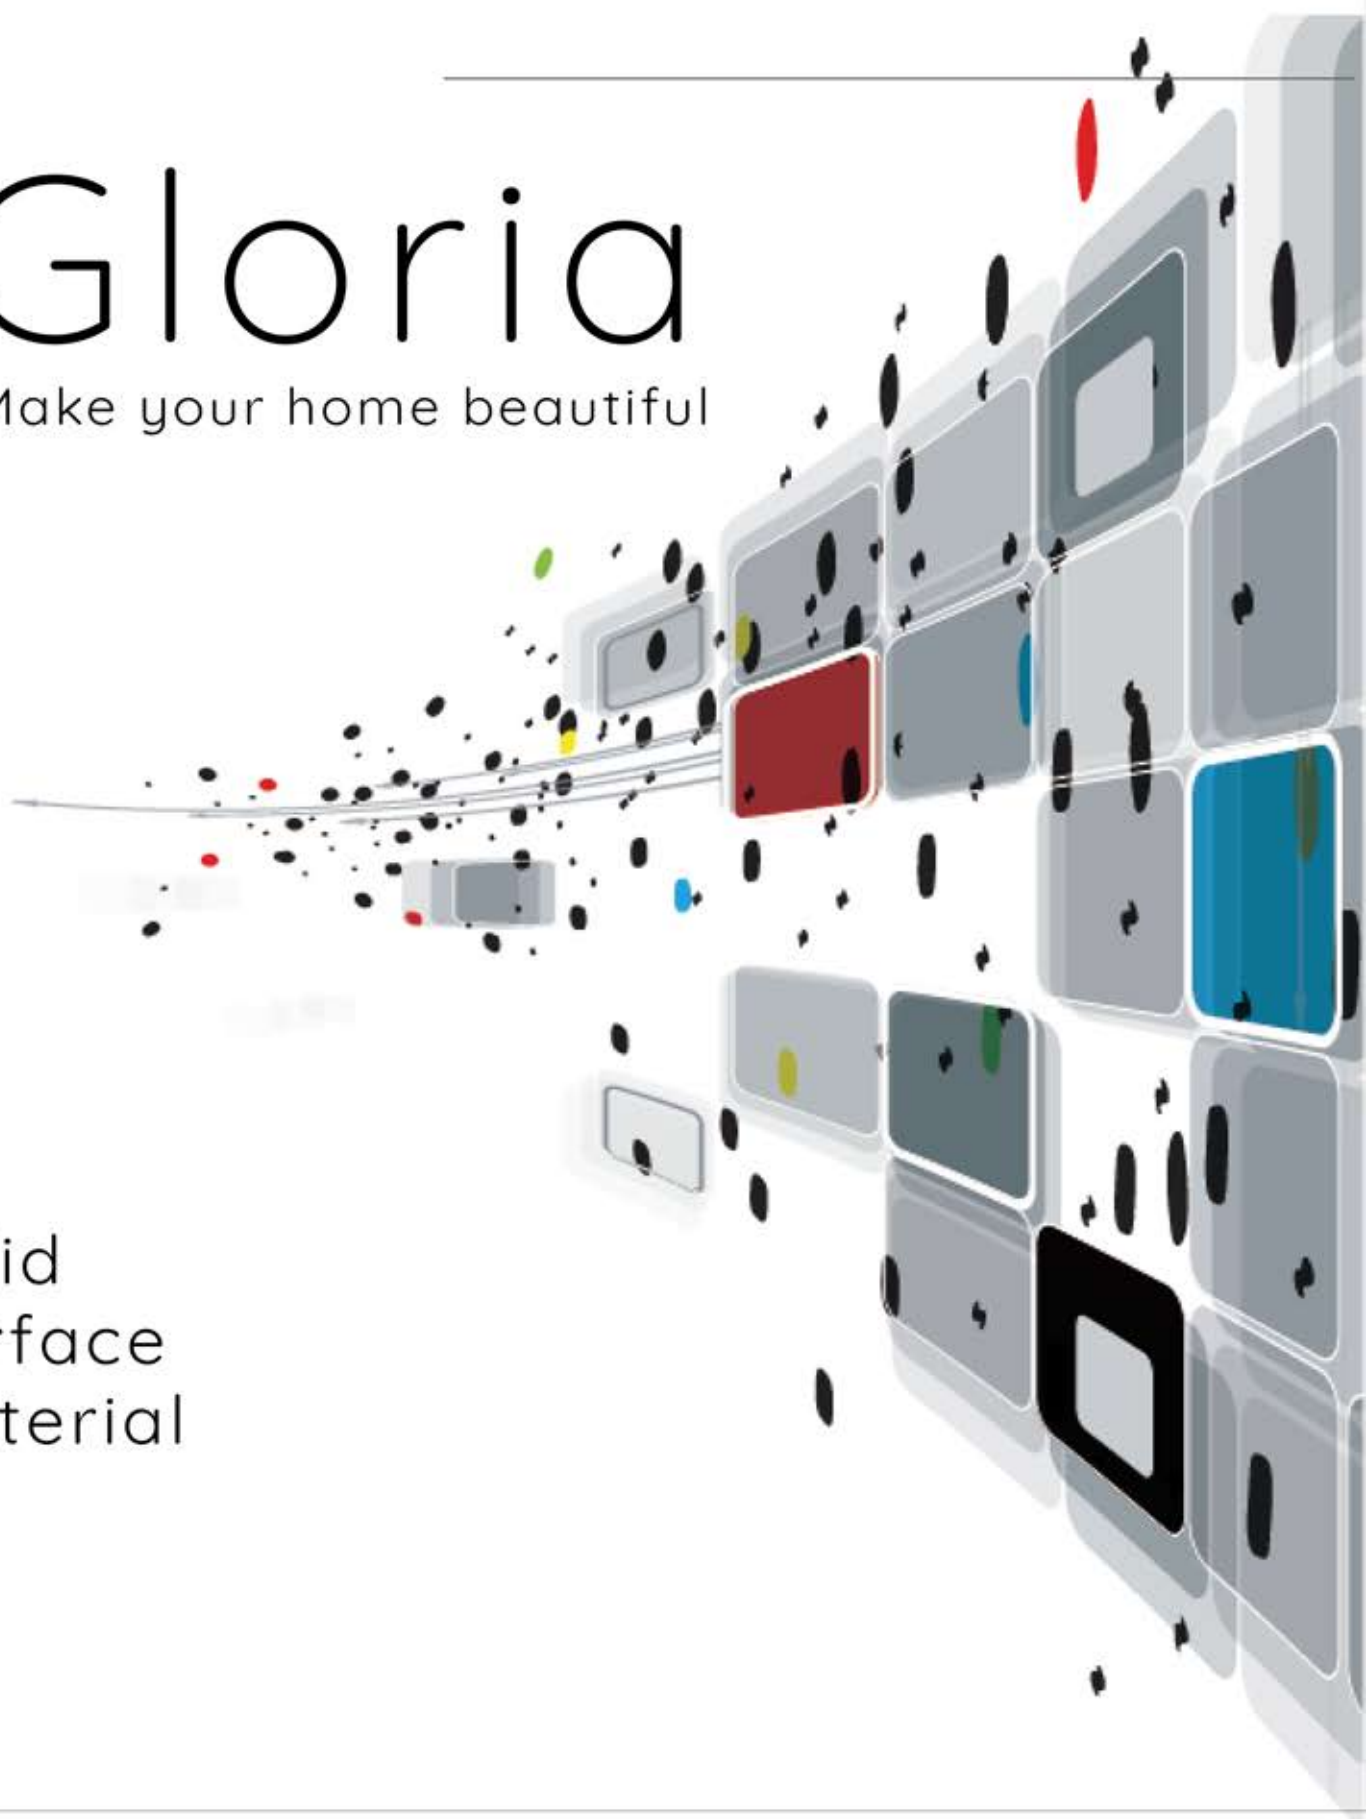

PHYSICAL PROPERTIES

PROPERTIES	RESULT	ANSI Z 124.3:1986 REQUIREMENT
Surface Test	Passed	Shall be free from crack, chipped areas and blisters
Point Impact Loads	Passed	Shall not show any cracks or chips
Stain Resistance Test (a) Black crayon (b) Black liquid shoe polish (c) Blue washable ink (d) Gentian violet solution (e) Lipstick (f) Hair dye (g) Iodine solution	Passed	Maximum stain resistance rating shall be 50
Cigarette Test	Passed	Shall be no ignition or progressive glow of the surface during or after contact with the lighted cigarettes
Chemical Resistance Test (a) Naphtha (b) Ethyl alcohol (c) Amyl acetone (d) Household ammonia solution, 10% (e) Citric acid solution, 10 (f) Urea, 6.0% (urine) (g) Hydrogen peroxide, 3% in water (h) Concentrated sodium hypochlorite solution (i) Phenol solution, 5% in water (j) Toluene (k) Ethyl acetone (l) Lye solution, 1% to 2% in water (m) Acetone	Passed	The surface finish shall be unaffected by the reagents except for superficial surface changes which are removable by sanding with 600 grit wet or dry sandpaper and water

PROPERTIES	RESULT	IAPMO PS 18-66
Washability Test	No brush mark was observed	Only slight brush marks are allowable

PROPERTIES	RESULT	TEST METHOD
Tensile Strength, psi	4200	ASTM D 638 64T
Flexural Strength, psi	7100	ASTM D 790
Flexural Modulus, psi	8.6x10 ⁵	ASTM D 790
Hardness, Rockwell	86	ASTM D 785 65
Izod Impact	0.3	ASTM D 256
Specific Gravity	1.7	ASTM D 792
Thermal Expansion, 10 ⁵ in/in, °F	4.5	ASTM D 696 44
Thermal Conductivity, BTU/hr/°F/ in/sq. ft	1.6	ASTM C 177
Thermal Shock, cycles	3000+	ASNI Z 123.3, Sec 6.3
High Temperature Resistance	No Change	NEMA LD 1-2.02
Stain Resistance	Passed	ASTM D 638 64T
Wear Resistance, % loss abrasive	0	ASTM D 790
Boiling Water Resistance	No Change	ASTM D 790
Water Absorption, % in 24hrs	0.08	ASTM D 785 65
Weatherability, 1000hrs	No Change	ASTM D 256
Food Contact/ Extratables (mg/sq.in)	<<0.1	ASTM D 792
Cigarette Test	Passed	ASTM D 696 44
Flame Spread Index, 1/2"	12	ASTM C 177
Impact Resistance, in.	72	ASNI Z 124.3, Sec 6.3

CARE & MAINTENANCE

GLORIA is a homogeneous material that is easy and simple to maintain. To keep its new and fresh look, you are advice to observe some routine maintenance procedures

Cleaning of Surface

For dirt and stains, please clean it with an ammonia based cleanser and with water and soap. Then wipe dry using damp cloth or sponge. For dark colors, please dry it with towel

Precautionary Measures

In most cases, *Gloria* can be repaired with ease if accidentally damaged. However, by taking the following precautions, you can have the problems minimized.

Heat

Even though *Gloria* has an excellent heat resistance property compared with other ordinary counter tops, placing hot pans and some heat generating appliances such as frying pans or crock pots can damage the surface. Always use a cork pad or trivet with rubber stand to protect the surface. Prolonged heat with temperature over 80°C or 170°F can damage the surface.

Chemical


Avoid exposing *Gloria* to chemicals such as paint remover, oven cleaner, etc.


Cutting

Do not cut anything directly on the surface. Always use a cutting board.






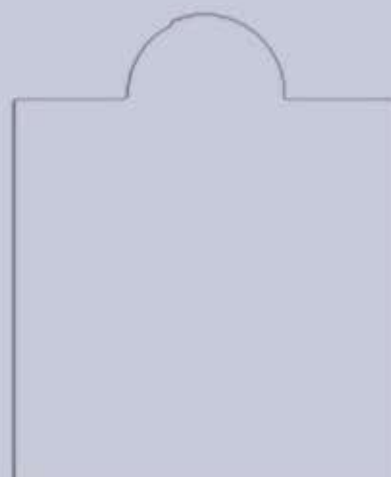


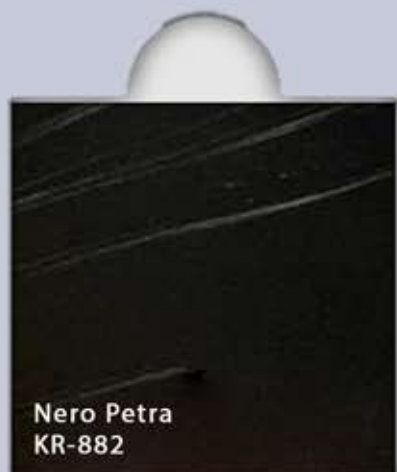


SINK AND BOWL

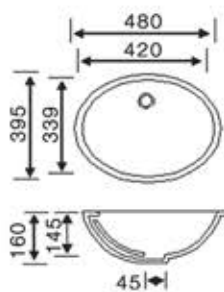


GMB-OV420

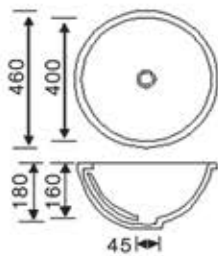


GMB-R400

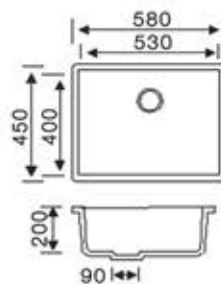


GMS-530




GMS-625



GMS-825



GMS-780

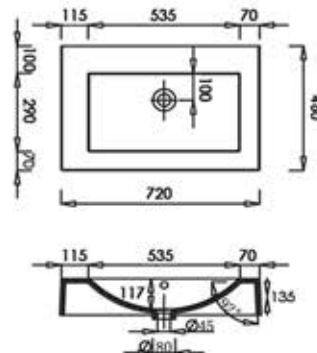


GMV/L720-C1


DISCLAIMERS

Due to different batches of Production color of materials supplied might have slight variation in tonality from samples shown in this catalogue.

Dark colors require additional care and maintenance i.e. keep the kitchen tops dry at all times and avoid placing high temperature utensils in direct contact with the tops. Use coaster to prevent causing scratch/damage to kitchen tops through abrasion & high temperature.



GMS-733L



GMS-733R

EDGE OPTIONS



Bullnose



Chamfer



Double Postform



Non-drip



Sharp Nose



Single Postform



Square Edge

Bring indoors the beauty of stone-without the blemishes of nature.
GLORIA, your Solid Surface Material that mirrors nature's beauty,
cladding your inner space to perfection.

Flow down the seamless wall to backsplash.
Roll along the flawless counter top. Indulge in
the sense of satisfaction from knowing GLORIA's secret -
immense versatility with low maintenance and cost.

Writing, kneading, or simply eating off -
there's endless room for ingenuity with what GLORIA supports of you.
Fulfill your aspiration for modern inner living - for many days to come.
Gloria Solid Surface materials are TUV SUD tested.



HEAD OFFICE / SHOWROOM

19 Gul Way, Singapore 629195

T (65) 6897 8888 | F (65) 6897 8128/ 38

RETAIL BRANCH

5 Sungei Kadut Street 2, JTC Trendspace

#02-09, Singapore 729227

T (65) 6365 7797 | F (65) 6365 7747



www.evershine.com



enquiry@evershine.com



www.facebook.com/evershinecorp

BCA REGISTERED CONTRACTOR - CR06 (L1)

