


/home/matheus/Algoritmos  
/CPP/Handy/include/Helpers  
/Benchmark.h

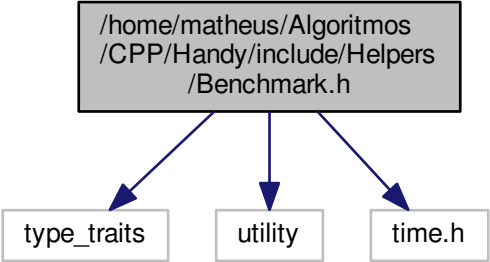

```
graph TD; A["/home/matheus/Algoritmos  
/CPP/Handy/include/Helpers  
/Benchmark.h"] --> B["type_traits"]; A --> C["utility"]; A --> D["time.h"];
```

The diagram illustrates the include relationships for the file `Benchmark.h`. A central box at the top contains the file's path: `/home/matheus/Algoritmos /CPP/Handy/include/Helpers /Benchmark.h`. Three blue arrows point downwards from this box to three separate boxes below it. The left box is labeled `type_traits`, the middle box is labeled `utility`, and the right box is labeled `time.h`. This indicates that `Benchmark.h` includes these three headers.

type\_traits

utility

time.h