


Does the LD panel matter for PGS?

Frederick J. Boehm
South Dakota State University
frederick.boehm@sdstate.edu
github.com/fboehm/linkage-disequilibrium-panels


Background

Polygenic scores (PGS) trained on GWAS summary statistics need an external linkage-disequilibrium (LD) reference panel. In practice that panel is often **ancestry-mismatched** or **under-sized** relative to the GWAS. How much PGS accuracy do we lose?

Simulation design

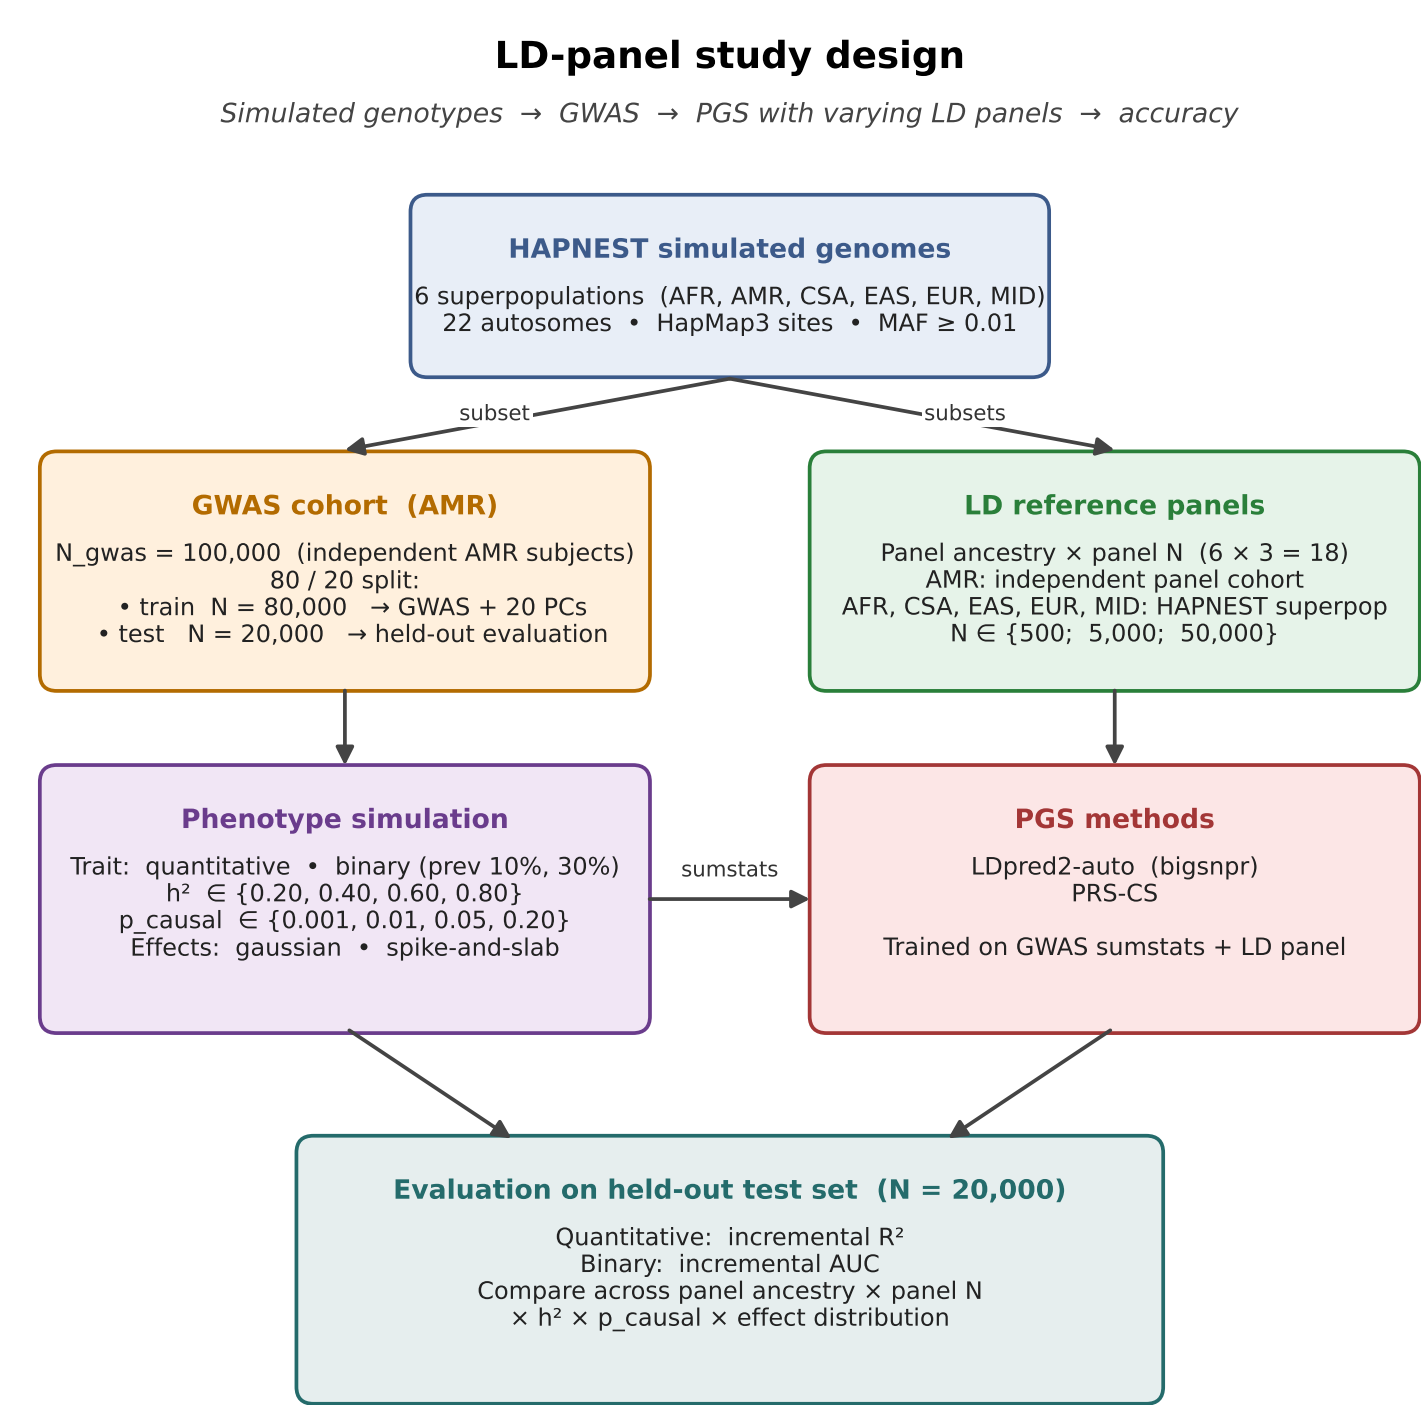

Methods compared

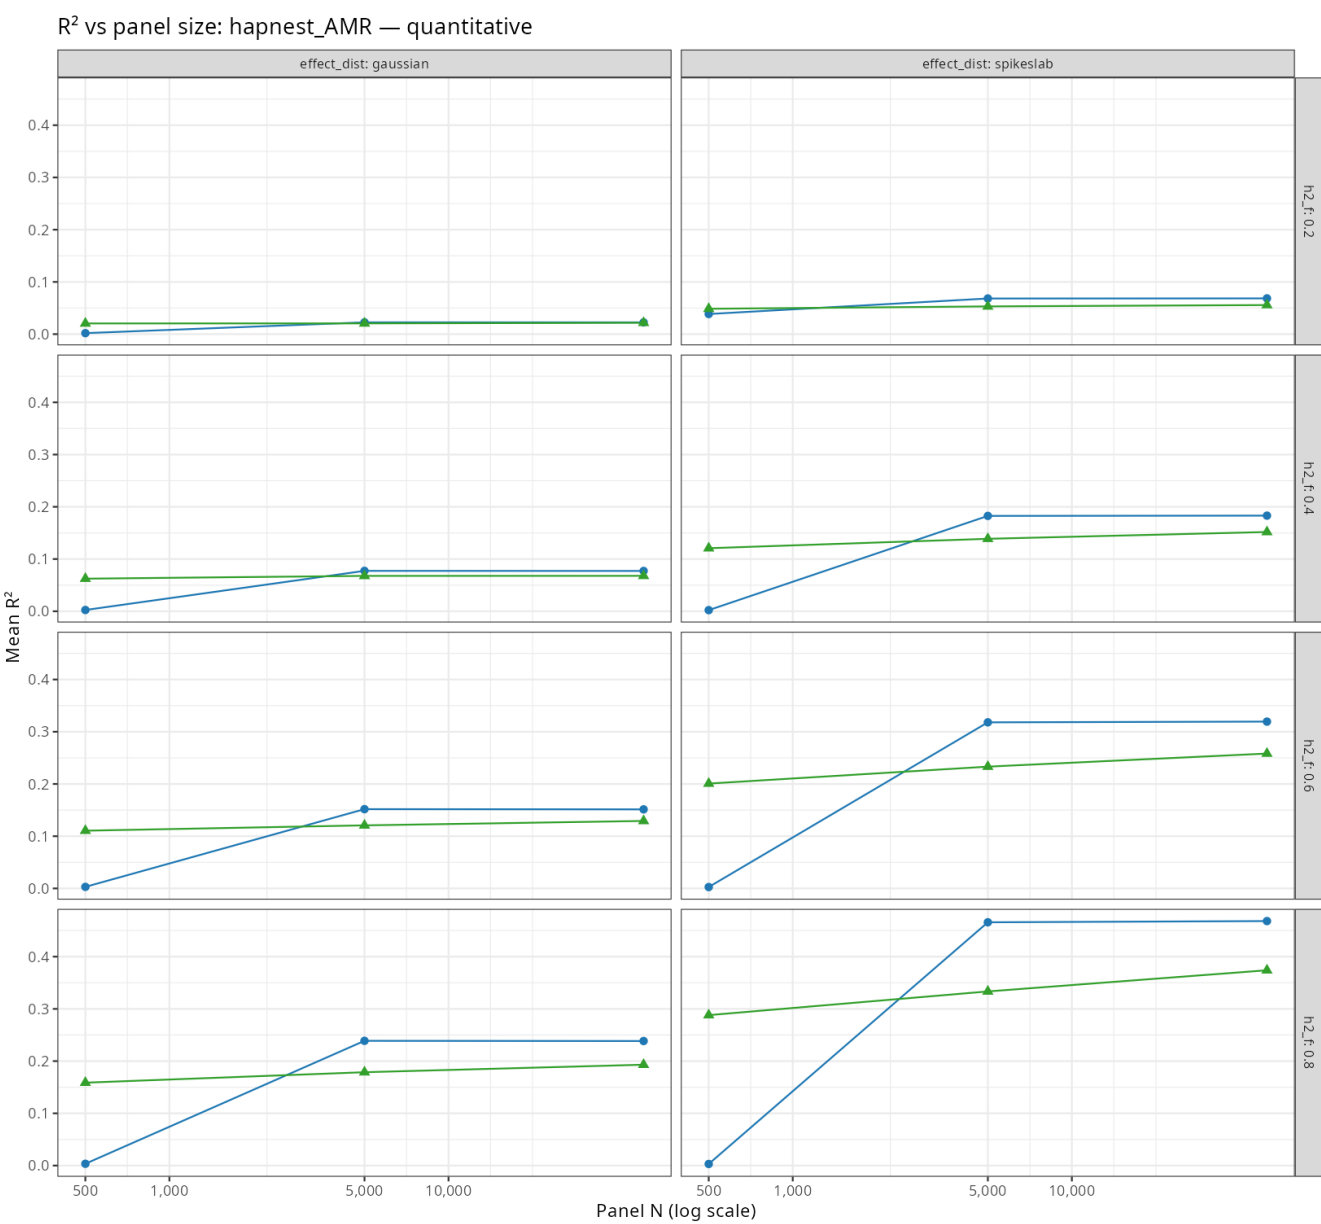

LDpred2 and PRS-CS produce similar results.

Panel ancestry and size matter when the trait is sparse and highly heritable.

In infinitesimal regimes, any panel will do.



R² vs. LD-panel size, quantitative trait, sparse spike-and-slab effects ($p_{\text{causal}} \in \{0.001, 0.01\}$). Rows: heritability h^2 . Matched AMR (orange) beats mismatched EAS (blue) by $\sim 2\times$ at high h^2 ; gap closes as panels grow.

When the panel matters

Sparse, high- h^2 traits ($p_{\text{causal}} \leq 0.01$, $h^2 \geq 0.2$): matched-ancestry AMR panels reach $\sim 2\times$ the R^2 of the worst mismatched panel (EAS).

Panel size drives most of its gain between $N = 500$ and $N = 5,000$; the jump to $N = 50,000$ adds little.

When it doesn't matter

Infinitesimal traits all six panel ancestries have similar PGS accuracies; panel size has negligible effect.

Low- h^2 traits ($h^2 \leq 0.10$): PGS accuracy is floor-limited; panel choice is a second-order concern.

Implications

For most polygenic traits the LD-panel choice is a *minor* contributor to PGS accuracy. Investment in matched-ancestry panels pays off **primarily** for sparse, high-heritability traits.

References

- [1] Florian Privé, Akyon Arbel, and Bjørn J. Vilhjálmsson. LDpred2: better, faster, stronger. *Bioinformatics*, 36(22):2315424–5431, 2020. doi:10.1093/bioinformatics/btaa1029.
- [2] Tian Ge, Chia-Yen Chen, Yeng Ni, Yen-Chen A. Feng, and Jordan W. Smoller. Polygenic prediction via Bayesian regression and continuous shrinkage priors. *Nature Communications*, 10(1):1776, 2019. doi:10.1038/s41467-019-09718-5.
- [3] Sophie Wharmy, Zhong Yang, Yuhua Bai, Benji Menni, Rahul Gupta, Yiyun Wang, Alicia Martin, Luke J. O'Connor, Samuel Koski, Pekka Martinen, Adam Auton, and Christopher Carlson. HAPNEST: efficient, large-scale generation and evaluation of synthetic datasets for genotypes and phenotypes. *Bioinformatics*, 39(16):eab335, 2023. doi:10.1093/bioinformatics/btad335.
- [4] Florian Privé, Hugues Archant, Alexey Zuytsov, and Michael G. B. Blum. Efficient analysis of large-scale genome-wide data with two R packages: bigstatist and bigsnpr. *Bioinformatics*, 34(16):2781–2787, 2018. doi:10.1093/bioinformatics/bty185.
- [5] 1000 Genomes Project Consortium. A global reference for human genetic variation. *Nature*, 526(7571):68–74, 2015. doi:10.1038/nature15933.
- [6] Miles Morrison and Dominik N. Sverre. EffectRef: The gateway to accessible science. *Genes*, preprint, 2022. doi:10.3390/genes13040481.
- [7] Felix Möller, Kim Philipp Jablonka, Boris Lütcher, Michael B. Hall, Christopher H. Tomkins-Tinch, Vanessa Schuch, Jan Forster, Soohyun Lee, Sven O. Twardziok, Alexander Kanitz, Andreas Wills, Manuel Holtgreve, Sven Rahmann, Sven Nähnson, and Johannes Köster. Sustainable data analysis with Snakemake. *F1000Research*, 10(3):3021, 2021. doi:10.12688/f1000research.20032.2.



GitHub repository



LinkedIn