


ShinyMR: Promoting Rigor & Reproducibility in Mendelian Randomization Studies

Frederick Boehm & Ji Hoon Park
Frederick.Boehm@sdsstate.edu

Graphical Abstract

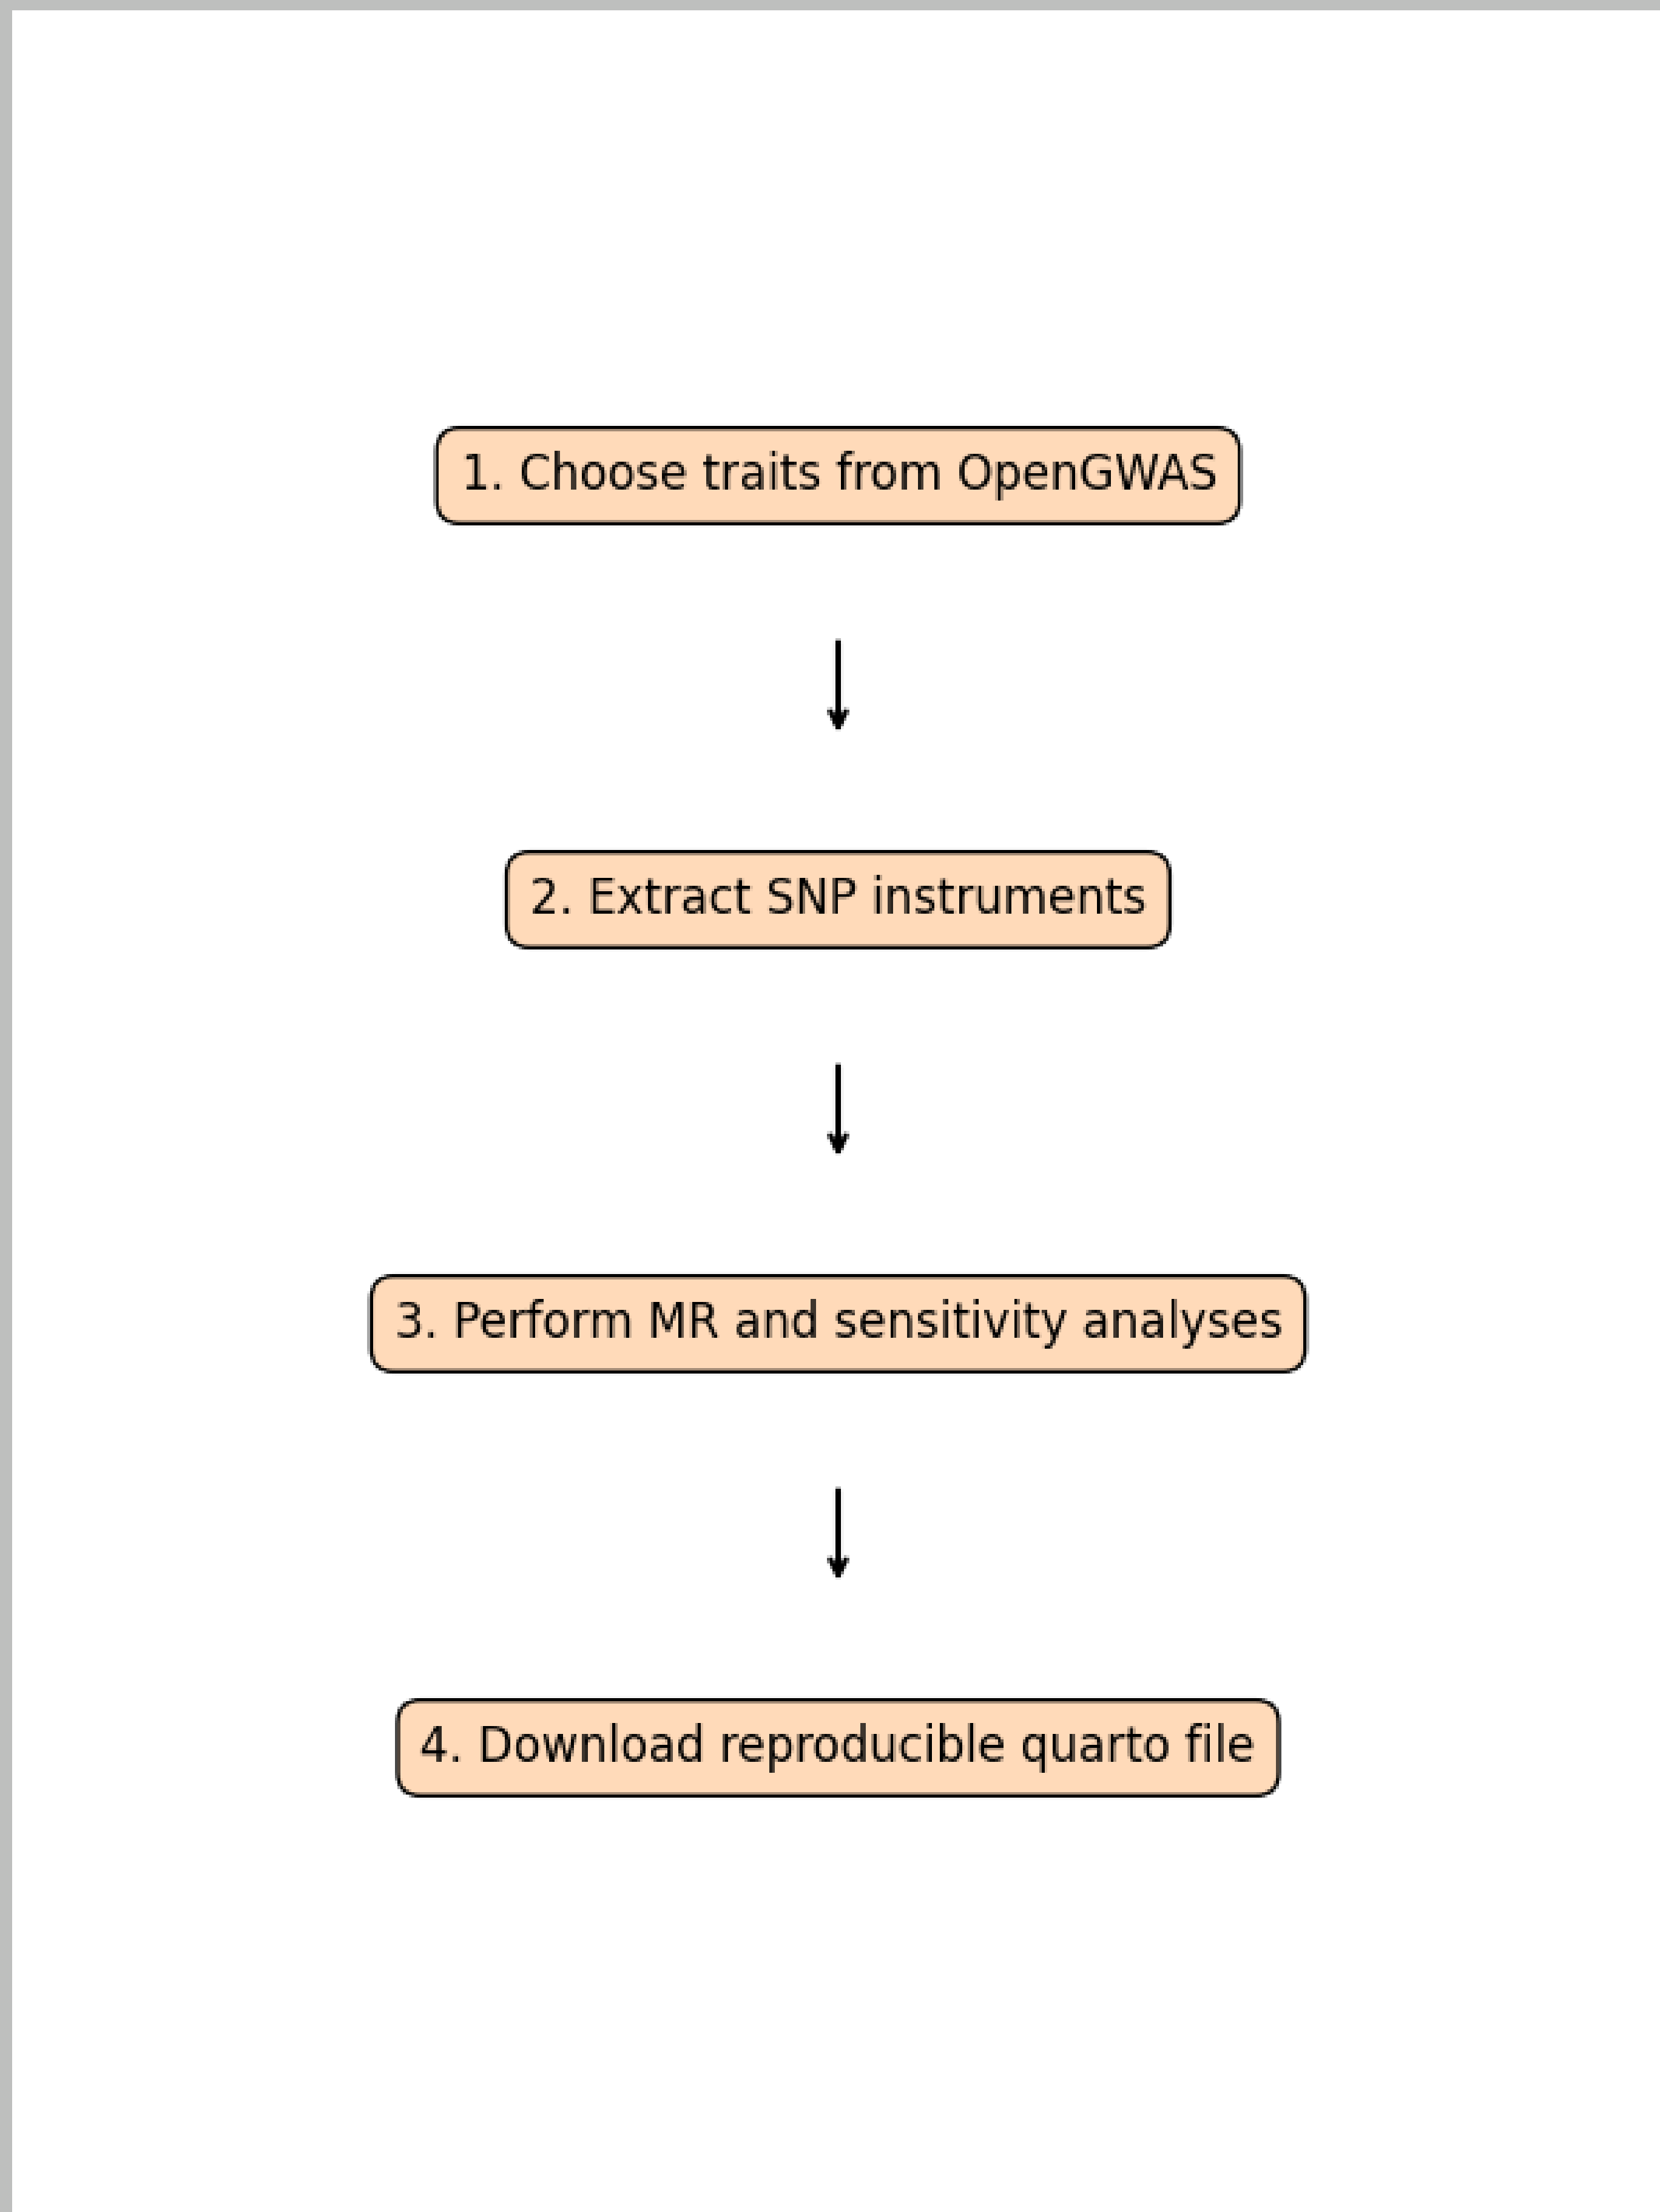


Abstract

The ShinyMR web app performs two-sample Mendelian Randomization and sensitivity analyses with functions from the TwoSampleMR R package. It features a downloadable quarto file with R code from the user's interactive analyses.




**SOUTH DAKOTA
STATE UNIVERSITY**


ShinyMR creates a reproducible quarto file for download

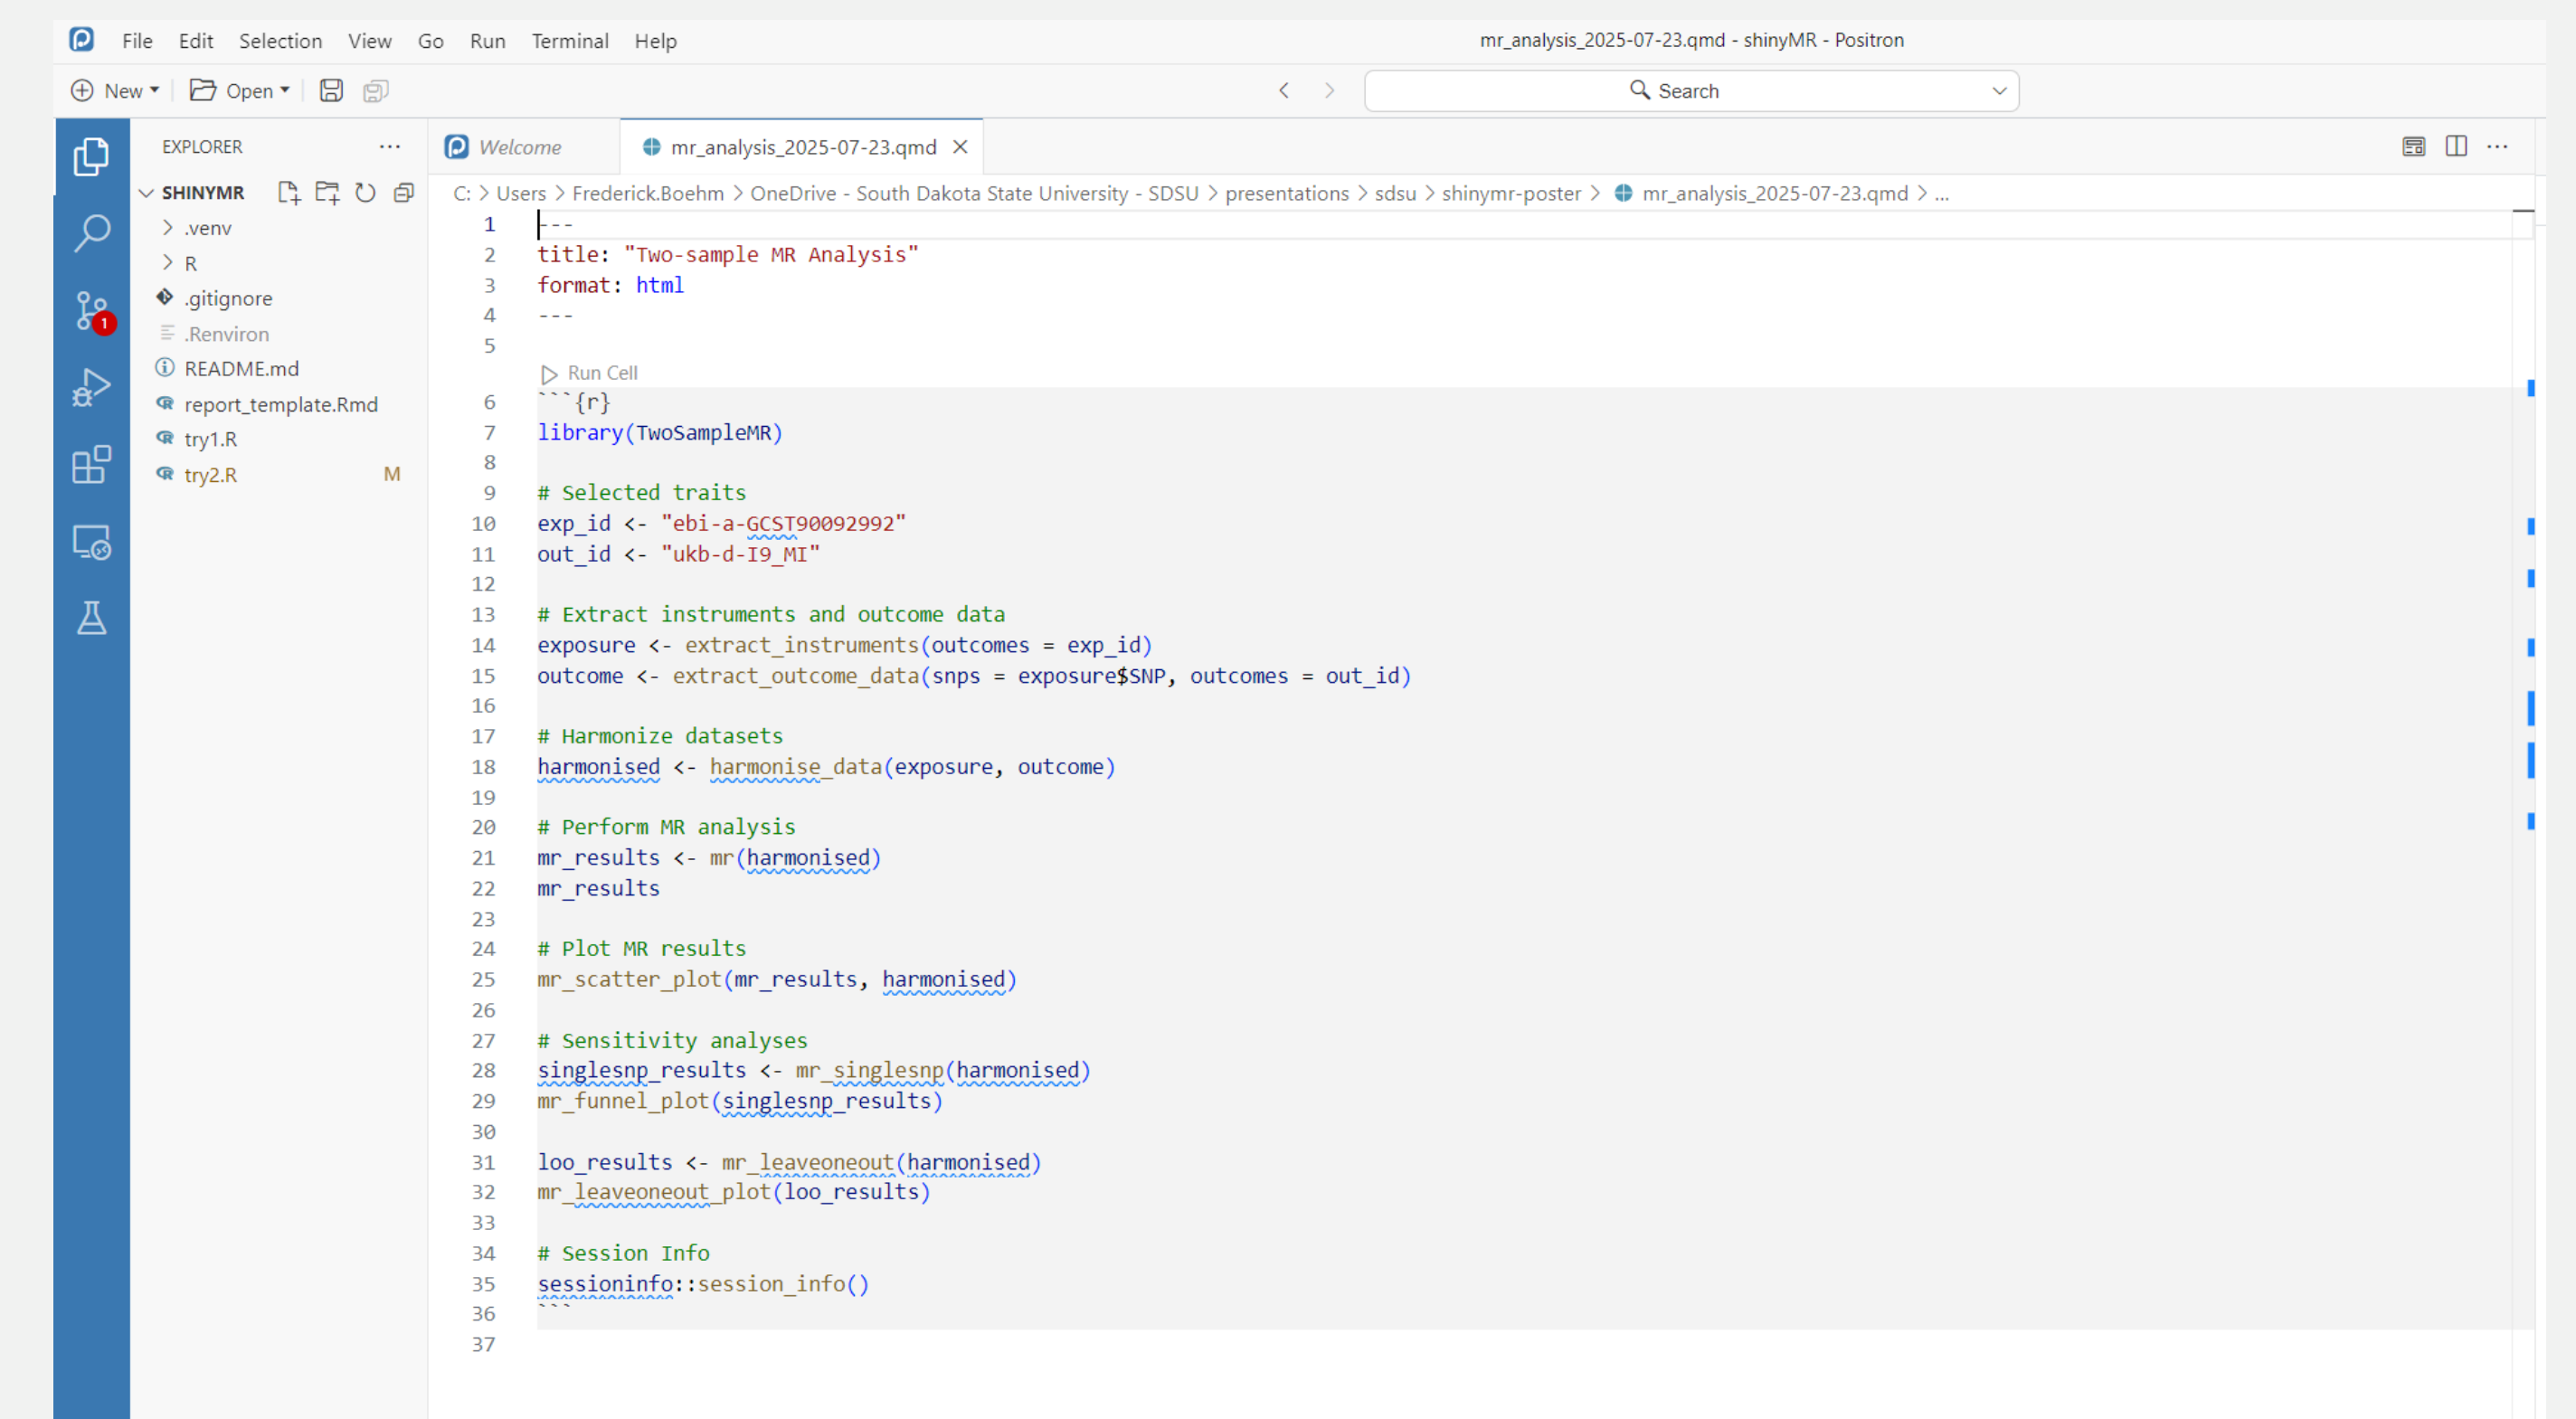


1 Choose traits from OpenGWAS

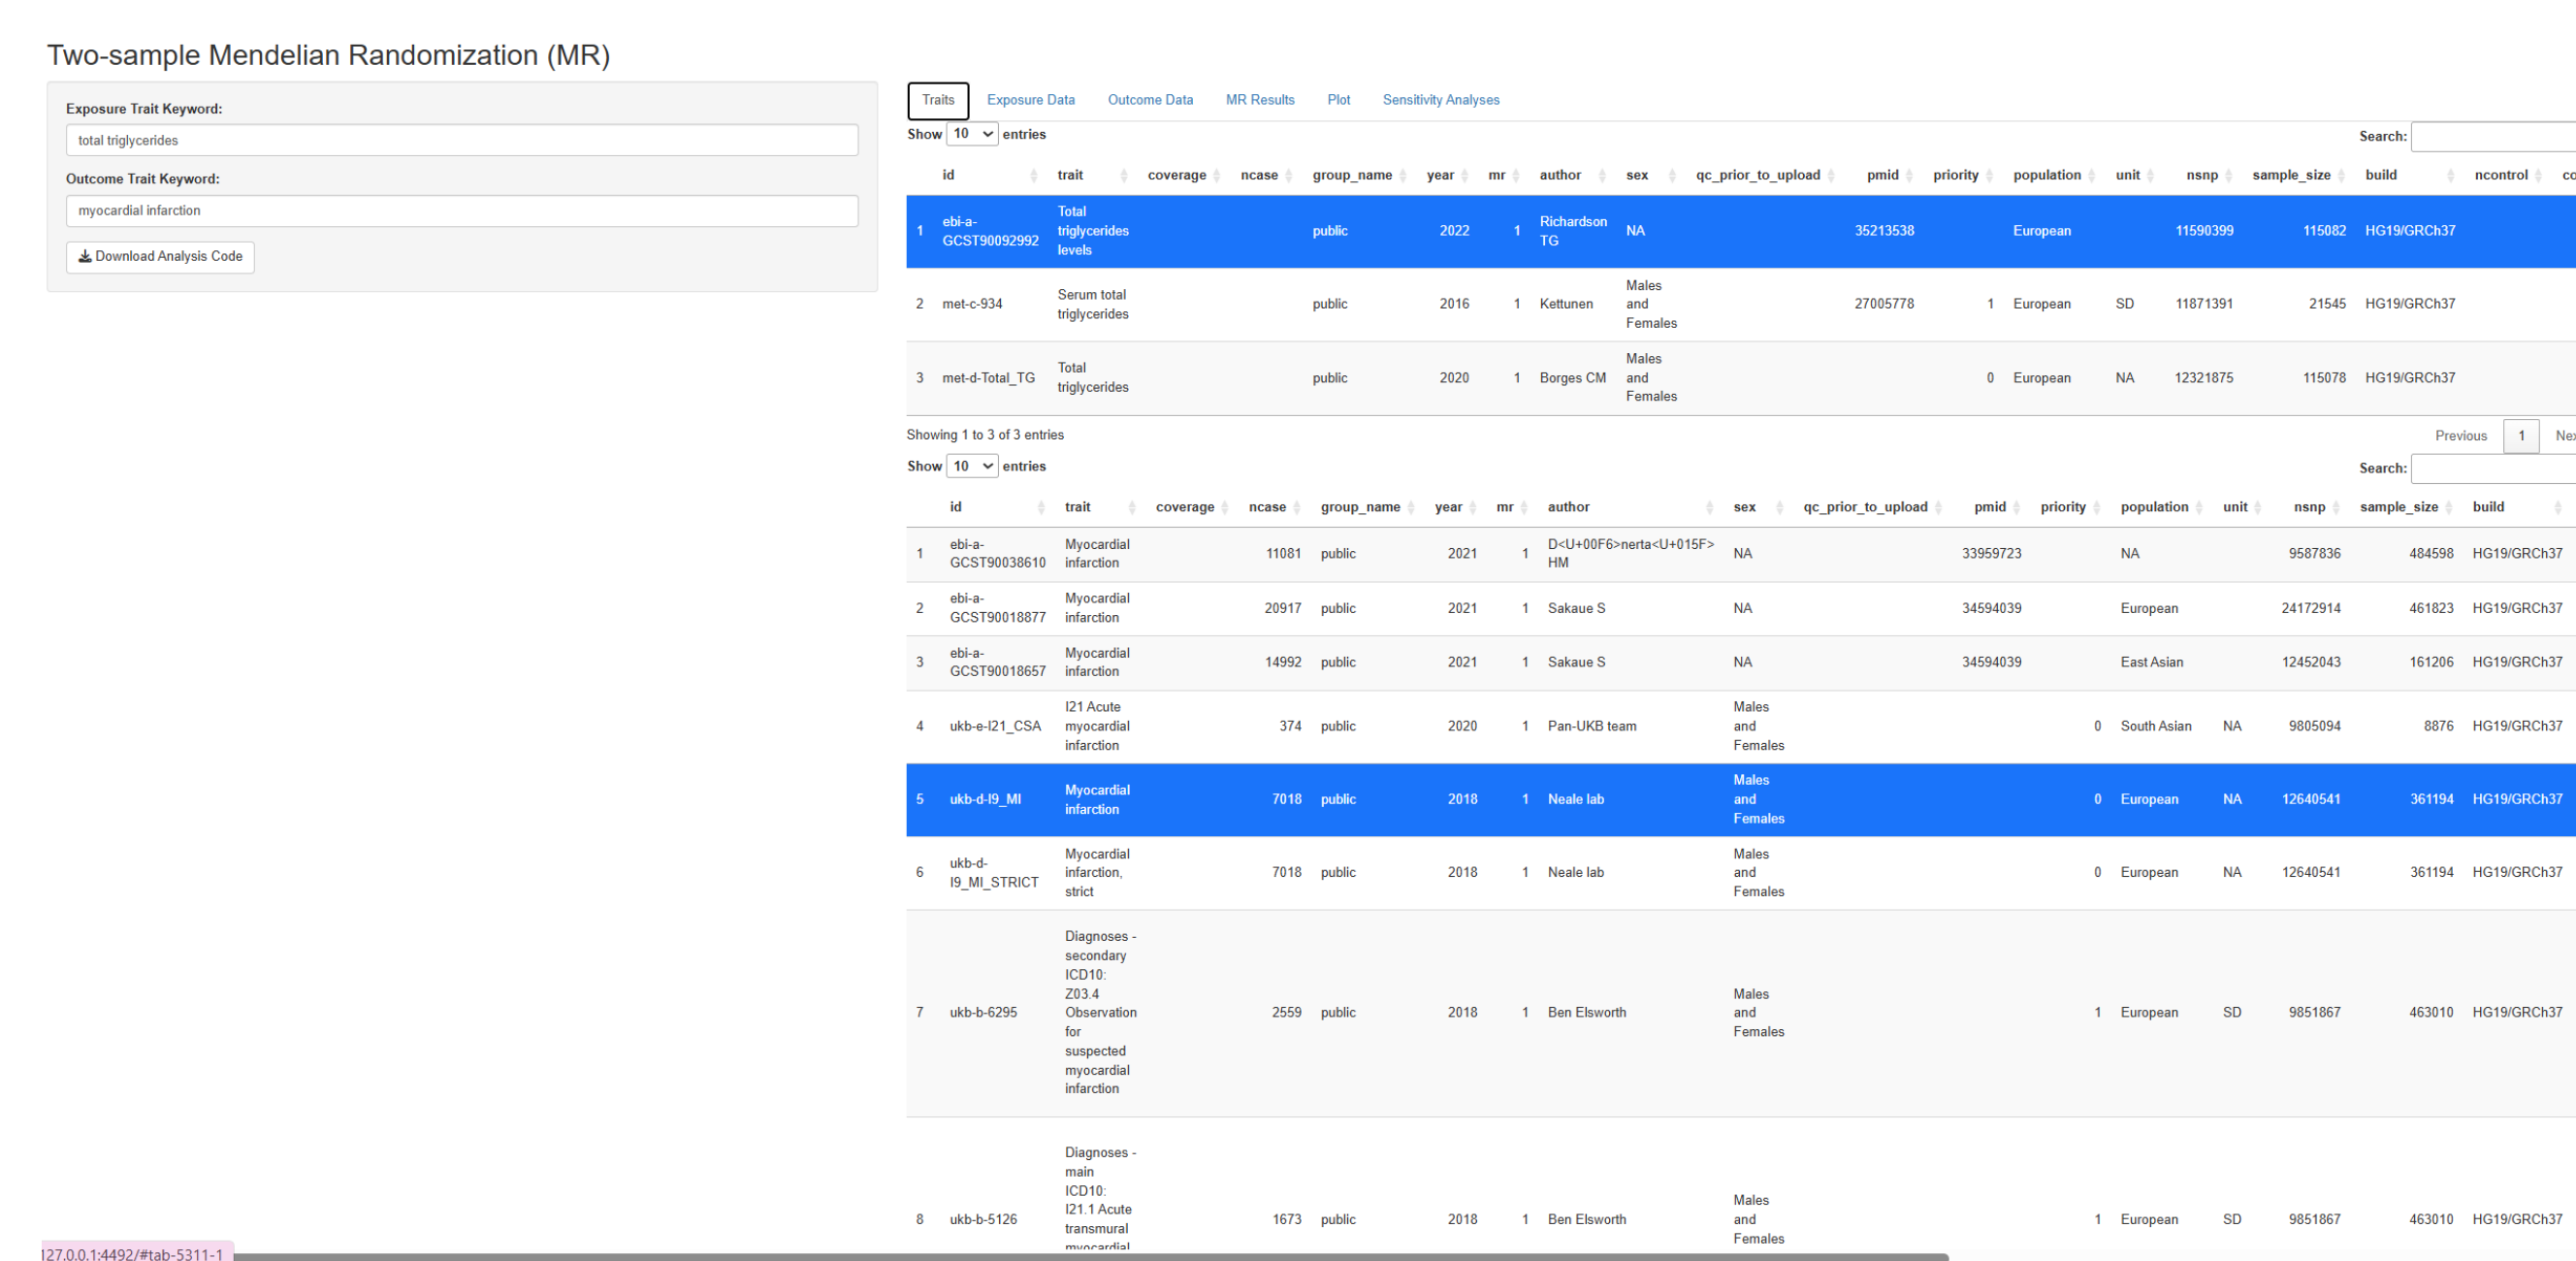


3 Perform MR analysis

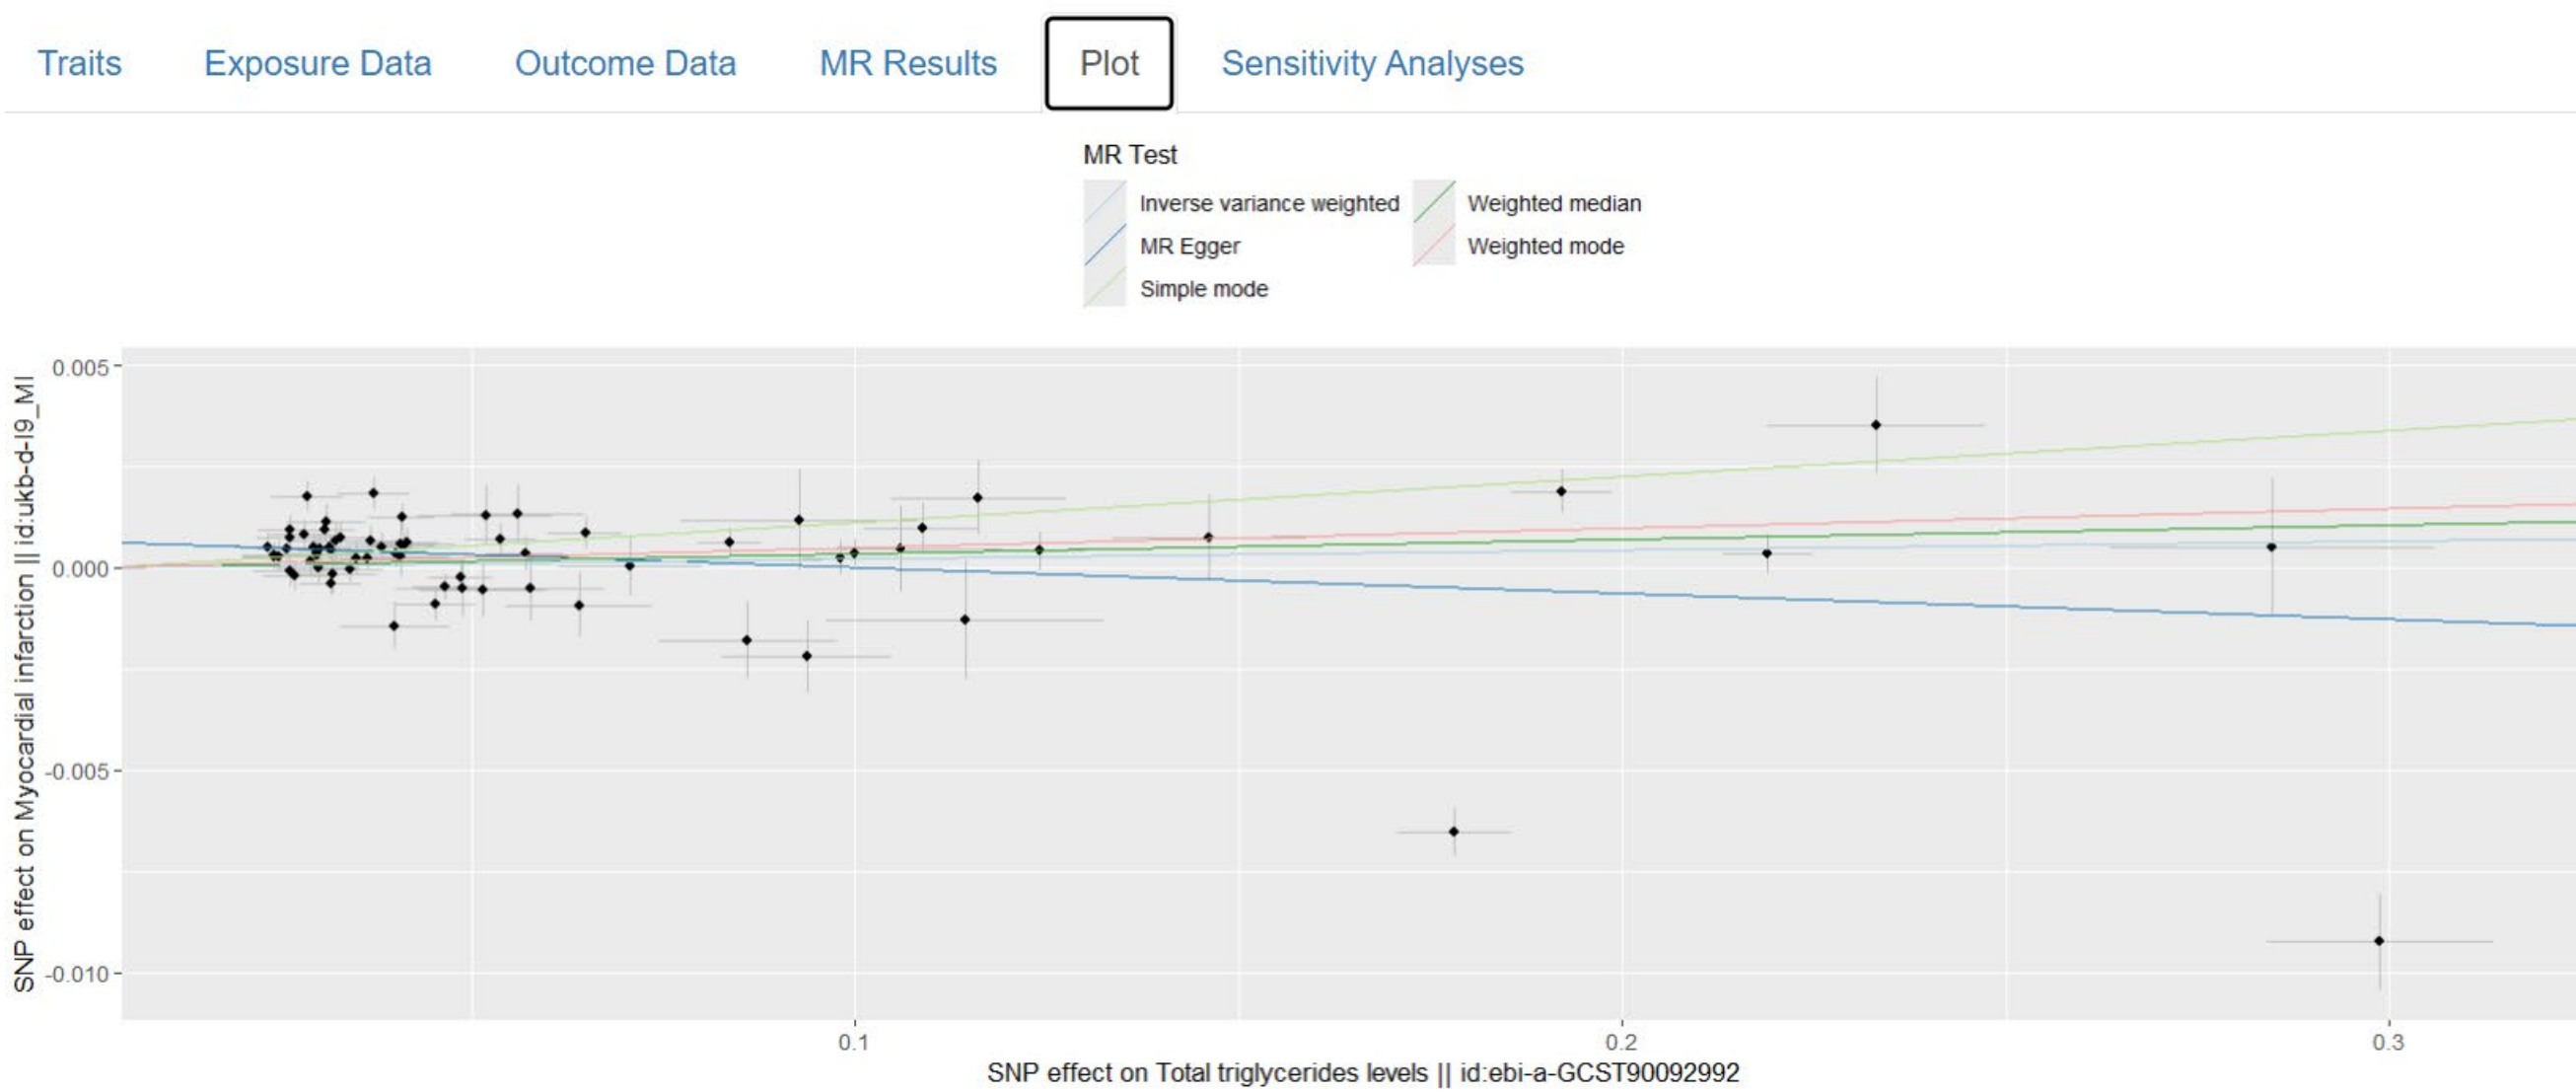

2 Extract SNP instruments

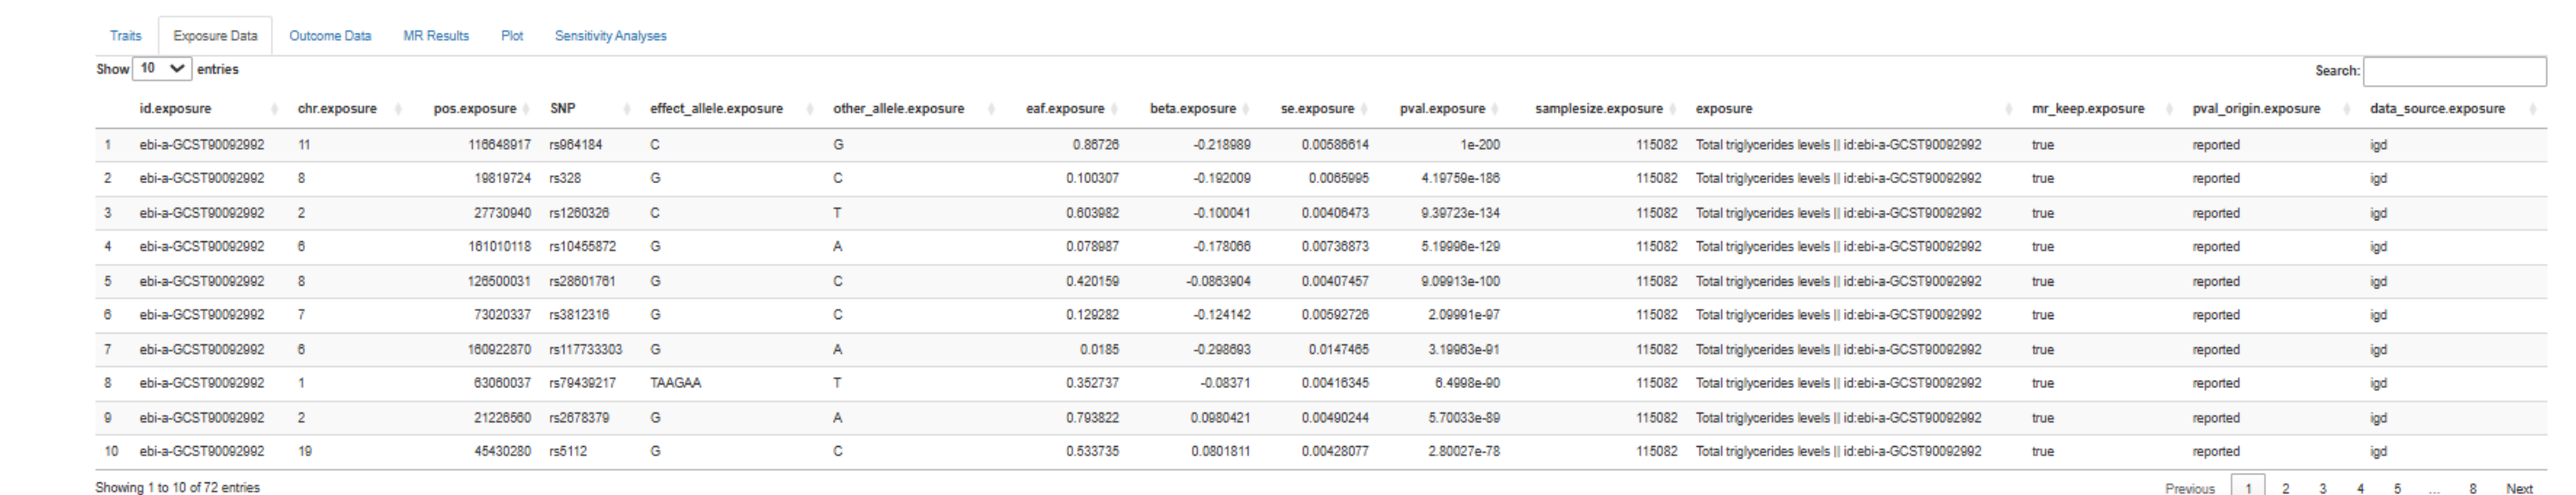

4 Perform sensitivity analyses

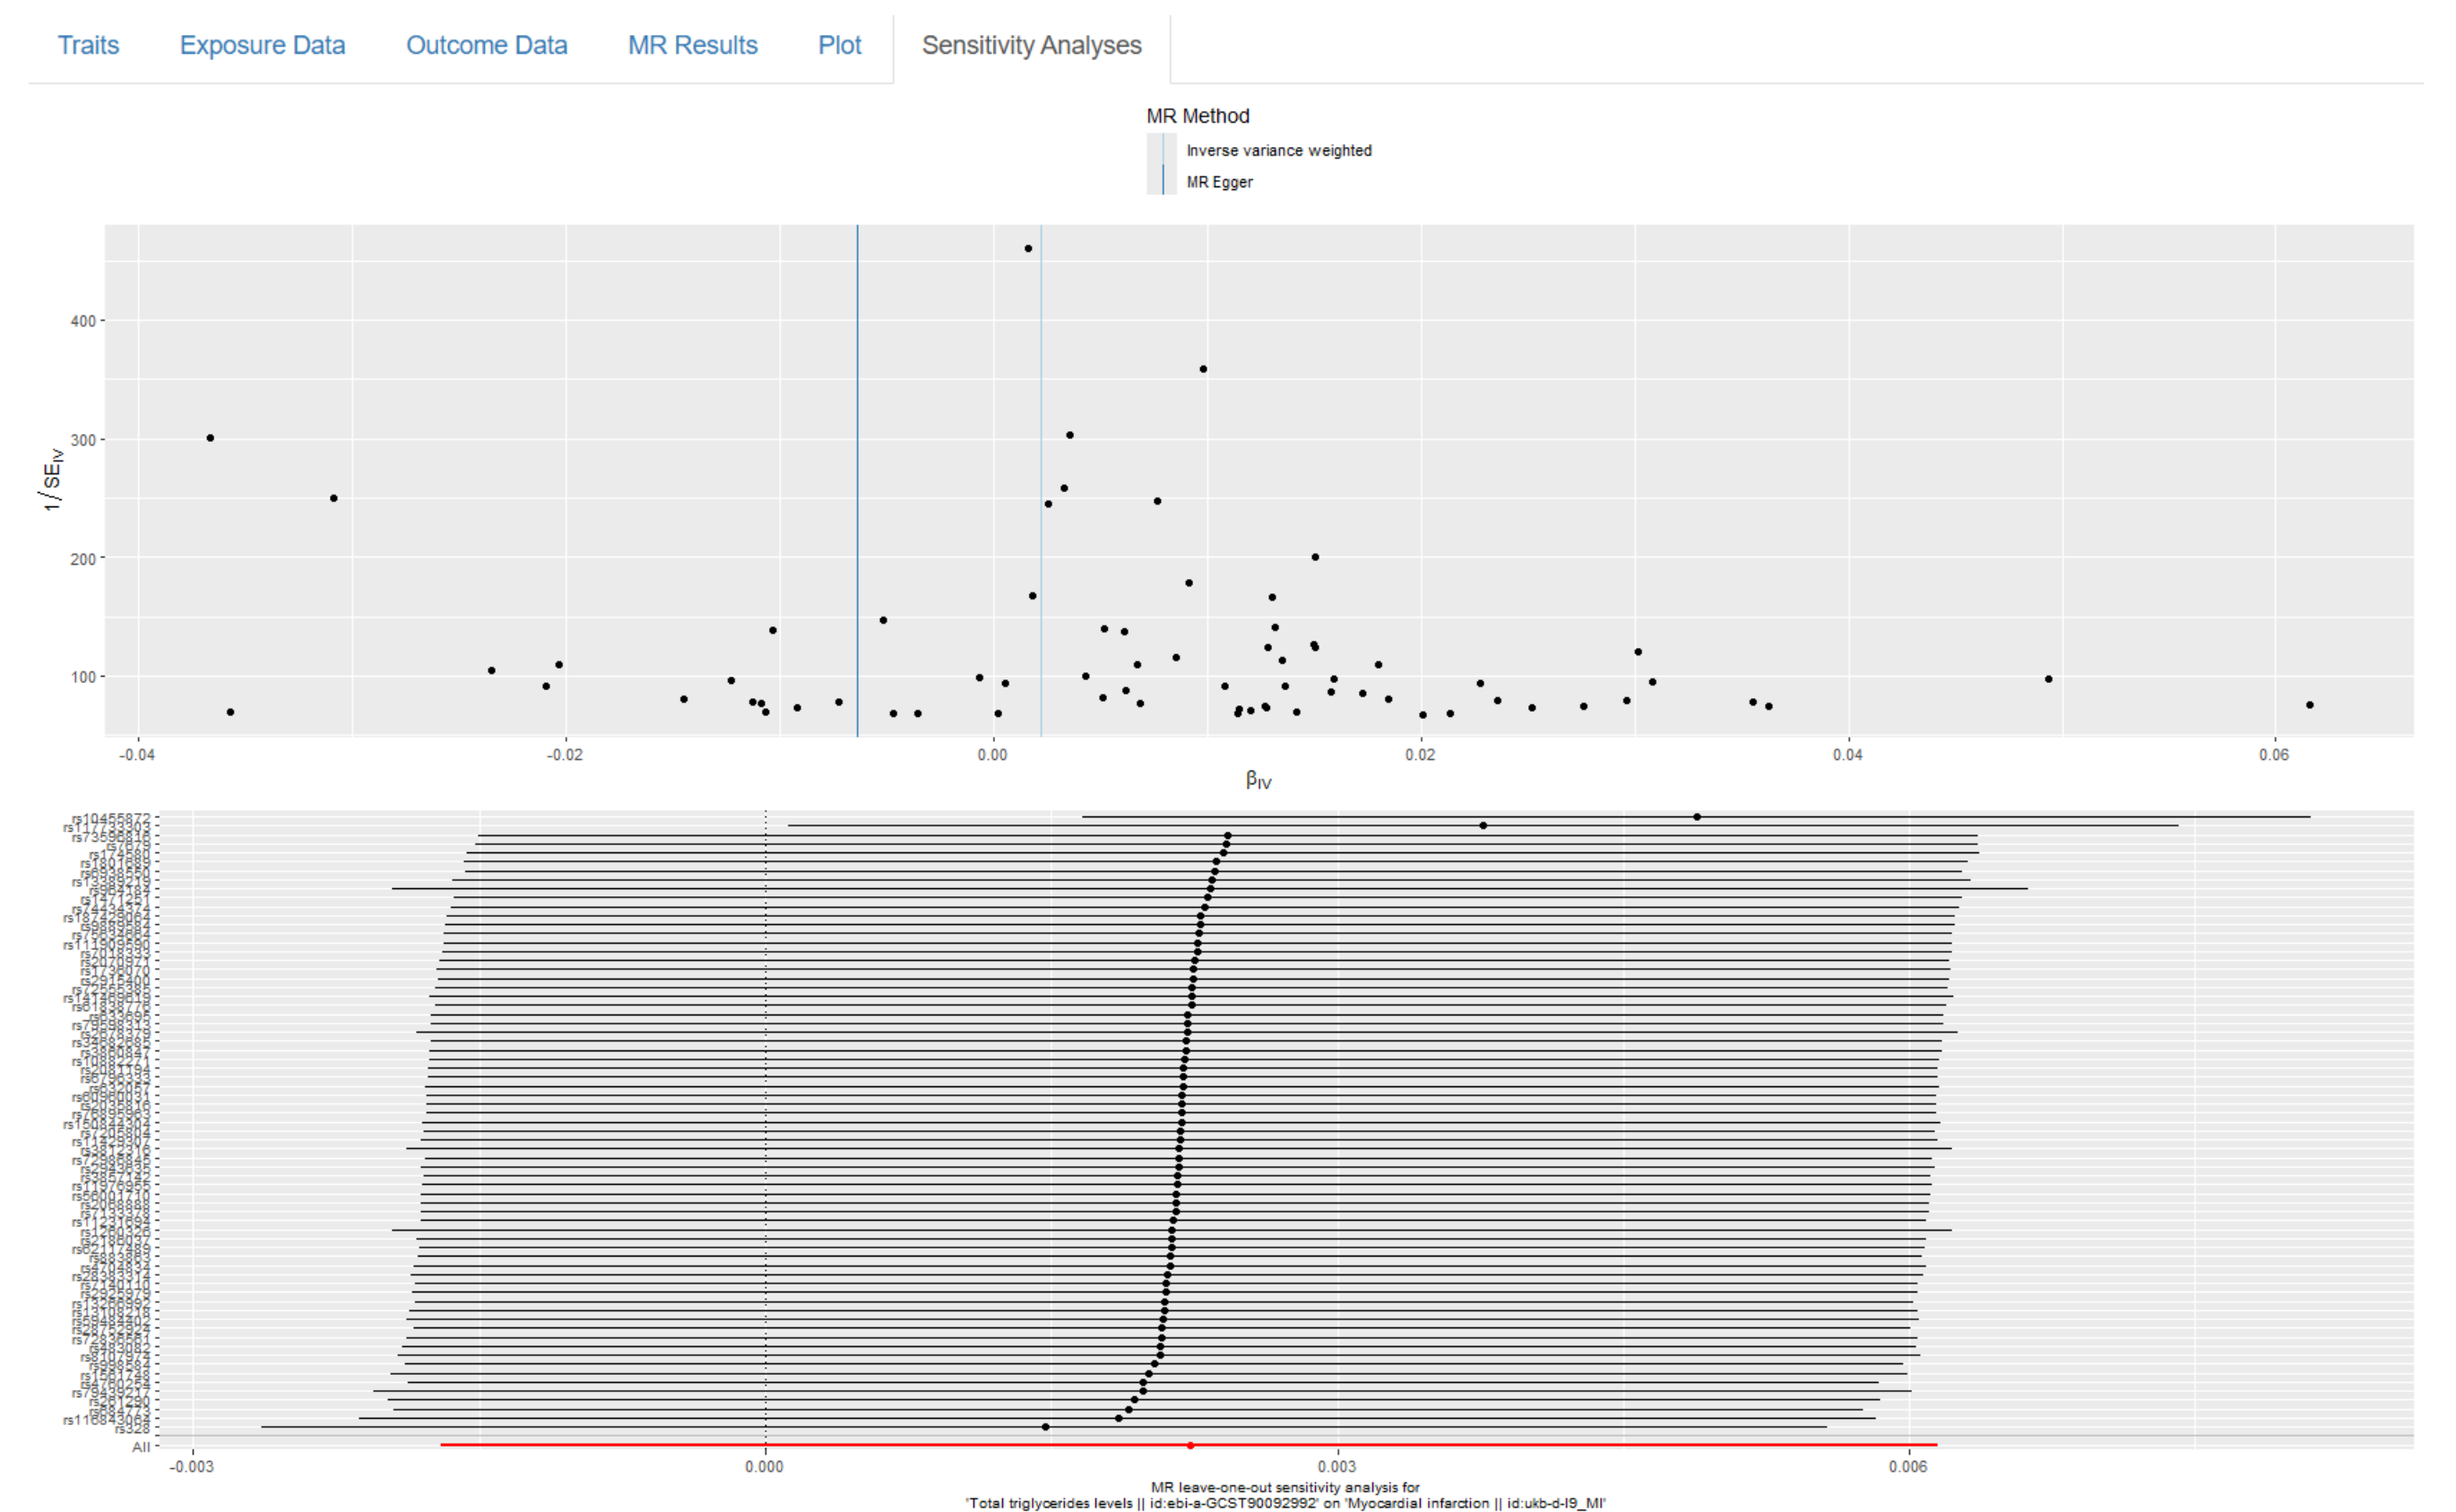

References

Chang W, Cheng J, Allaire J, Sievert C, Schloerke B, Xie Y, Allen J, McPherson J, Dipert A, Borges B (2024). `_shiny`: Web Application Framework for R. doi:10.32614/CRAN.package.shiny <<https://doi.org/10.32614/CRAN.package.shiny>>, R package version 1.10.0, <https://CRAN.R-project.org/package=_shiny>.

Davey Smith, George, and Shah Ebrahim. "'Mendelian randomization': can genetic epidemiology contribute to understanding environmental determinants of disease?." *International journal of epidemiology* 32.1 (2003): 1-22.

Hartwig, Fernando Pires, et al. "Two-sample Mendelian randomization: avoiding the downsides of a powerful, widely applicable but potentially fallible technique." *International journal of epidemiology* 45.6 (2016): 1717-1726.

Hemani G, Zheng J, Elsworth B, Wade KH, Baird D, Haberland V, Laurin C, Burgess S, Bowden J, Langdon R, Tan VY, Yarmolinsky J, Shihab HA, Timpson NJ, Evans DM, Relton C, Martin RM, Davey Smith G, Gaunt TR, Haycock PC, The MR-Base Collaboration. The MR-Base platform supports systematic causal inference across the human phenotype. *eLife* 2018;7:e34408. doi: 10.7554/eLife.34408