


Casos de prueba:

- Error Semántico, mayor a 32 caracteres

[illegible]

- Error Sintáctico, identificador incorrecto 2ss2



The screenshot shows the VS Code editor interface. The top panel displays the file explorer with the following files: `flexBasico.l`, `bisonBasico.y`, `iniciar.sh`, and `archivo.txt`. The `archivo.txt` file is open in the editor, showing the following code:

```
1 inicio var:=2var; fin
```


The bottom panel shows the TERMINAL view. The command prompt displays the following output:

```
C:\Users\Facu\flexBison> a.exe
el error fue: syntax error

C:\Users\Facu\flexBison>
```


The terminal also shows a list of available shells: `powershell` and `cmd`.

- Tabla de símbolos con 2 IDs

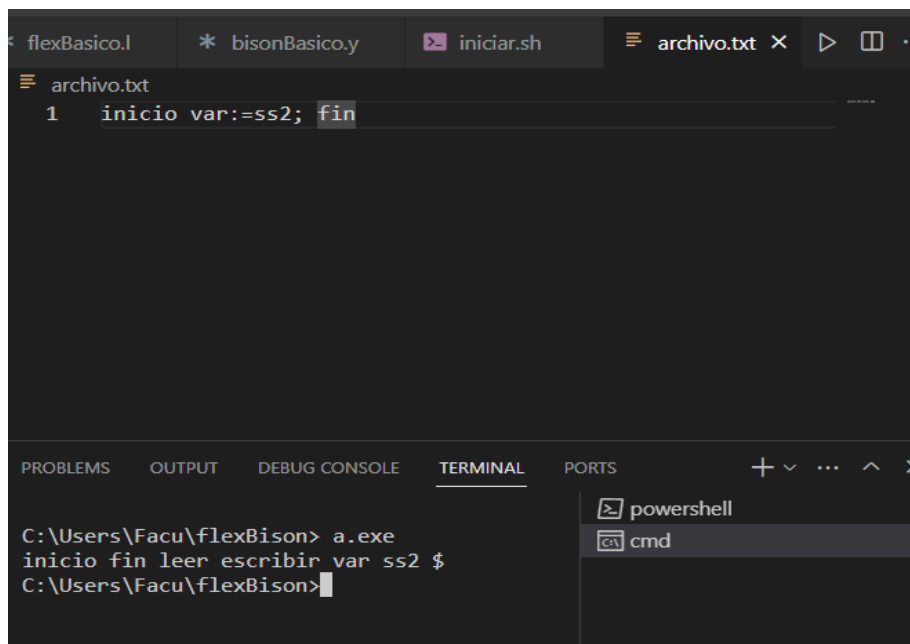


The screenshot shows a code editor with a dark theme. The top bar has tabs for 'flexBasico.l', 'bisonBasico.y', 'iniciar.sh', and 'archivo.txt'. The 'archivo.txt' tab is active, showing a single line of code: `1 inicio var:=ss2; fin`. Below the editor is a panel with tabs for 'PROBLEMS', 'OUTPUT', 'DEBUG CONSOLE', 'TERMINAL', and 'PORTS'. The 'TERMINAL' tab is active, displaying the command prompt output: `C:\Users\Facu\flexBison> a.exe`, `inicio fin leer escribir var ss2 $`, and `C:\Users\Facu\flexBison>`. To the right of the terminal is a 'PORTS' panel showing 'powershell' and 'cmd'.

- TS, pero sin repetidos si ya está previamente

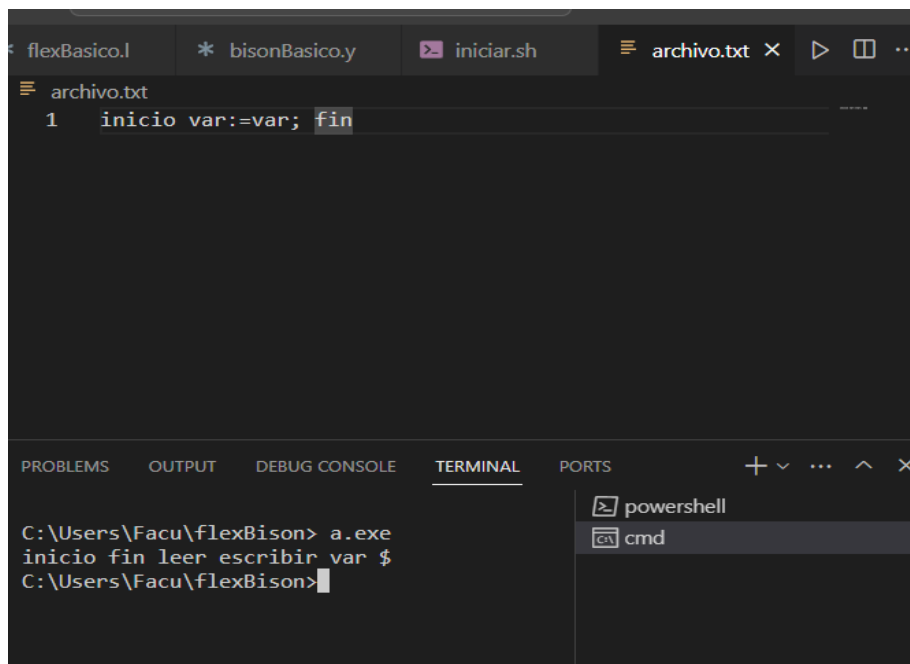

The screenshot shows a code editor with a dark theme. The top bar has tabs for 'flexBasico.l', 'bisonBasico.y', 'iniciar.sh', and 'archivo.txt'. The 'archivo.txt' tab is active, showing a single line of code: `1 inicio var:=var; fin`. Below the editor is a panel with tabs for 'PROBLEMS', 'OUTPUT', 'DEBUG CONSOLE', 'TERMINAL', and 'PORTS'. The 'TERMINAL' tab is active, displaying the command prompt output: `C:\Users\Facu\flexBison> a.exe`, `inicio fin leer escribir var $`, and `C:\Users\Facu\flexBison>`. To the right of the terminal is a 'PORTS' panel showing 'powershell' and 'cmd'.

- Error Léxico

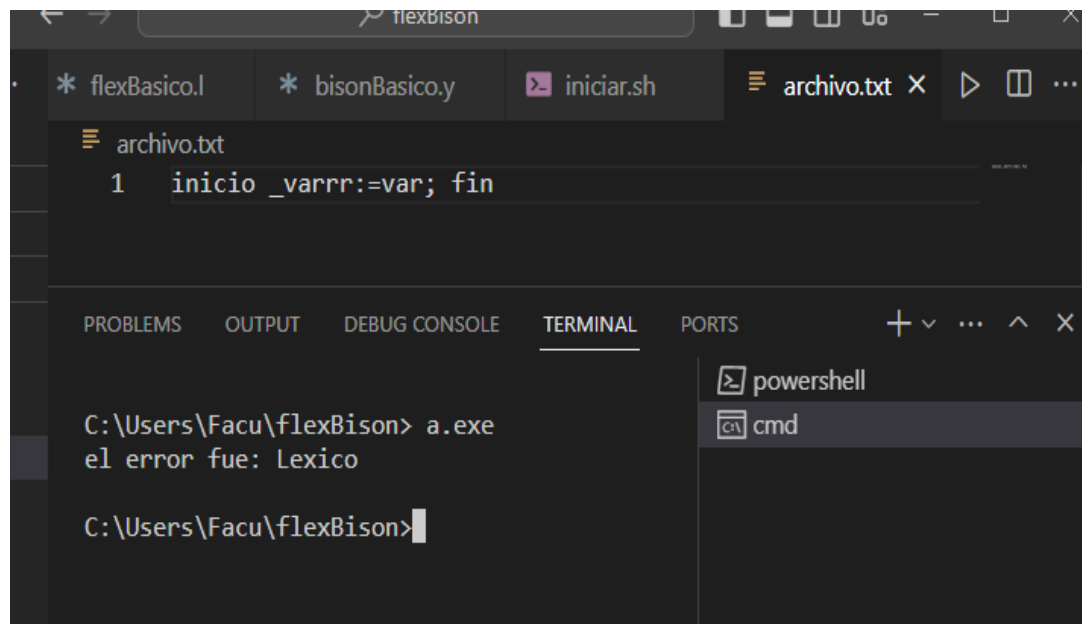

The screenshot shows a code editor with the following elements:

- File Explorer:** Displays four files: `* flexBasico.l`, `* bisonBasico.y`, `iniciar.sh`, and `archivo.txt`.
- Editor:** The file `archivo.txt` is open, showing a single line of code: `1 inicio _varrr:=var; fin`. The text `_varrr` is underlined, indicating a lexical error.
- Terminal:** The `TERMINAL` tab is active, showing the command `C:\Users\Facu\flexBison> a.exe` and its output: `el error fue: Lexico`. The prompt `C:\Users\Facu\flexBison>` is visible on the next line.
- Taskbar:** On the right side of the terminal, there are buttons for `powershell` and `cmd`.