

Using the Illinois Report Card Data to Teach Statistics

MMC Conference of Workshops

Frank Briody / Prospect High School / frankbriody@gmail.com

2/1/2020

Contents

1	Variables	2
2	Descriptive Statistics via State Demographics	2
2.1	Categorical Count (Raw)	2
2.2	Categorical Count (Formatted)	2
2.3	Categorical Plot	2
2.4	Categorical Analysis I	3
2.5	Categorical Analysis II	3
3	Software	4
3.1	R and RStudio	4
3.2	Fathom	4
3.3	Others	4
4	Data Import	5
4.1	Data Files	5
4.2	Processed into Fathom	5
4.3	Importing .csv into Excel	5
5	Numeric Summaries	6
5.1	Lists	6
5.2	Two-Way Tables	7
5.3	Mean vs Median	7
6	Single Values	8
6.1	Finding a School	8
6.2	Using a Filter	9
6.3	Using a Function	9
6.4	Analysis in Fathom	9
6.5	Filters in Excel	9
7	Correlation and Regression	9
7.1	Guess the Correlation	9
7.2	Scatterplot Analysis	10
7.3	Predicting ACT Scores	11
7.4	Regression Output	12
7.5	Regression in Fathom	14
8	Random Selection and Simulation	14
8.1	Rolling a die	14
8.2	Random Selection	14
8.3	Stratified Sample	14
8.4	Confidence Interval Simulation	15
9	Appendix	17
9.1	Learning More	17

1 Variables

The ISBE raw data file *rx17.txt* contains 1,471 variables. The variable definitions are in the Excel file *RC17_layout.xlsx* and have been categorized into the groups shown below. The first number represents available variables in each group while the second is the number actually imported into the processed data file. The import script produces 316 variables from 20 of the 21 categories for all 3,796 Illinois public schools. (None of the NAEP variables were imported.) Usable files will be discussed in section 4.

School information (13 variables;12 imported)	AP courses (168;42)
Student demographics (396;71)	IB courses (168;42)
ACT (44;11)	Dual credit (168;42)
Instructional setting (92;2)	AP exams (36;12)
Teacher and admin statistics (78;26)	Post secondary remediation (4;1)
District financial (67;40)	Response rate (5E survey) (4;2)
Region and legislative (3;2)	Health and wellness (3;1)
National Assmnt. of Educ. Progress (NAEP) (184;0)	Teacher Attendance (4;1)
College and Career readiness (16;3) CTE (4;1)	Teacher Evaluation (2;1)
Advanced coursework (12;3)	School District Count (3;1)

2 Descriptive Statistics via State Demographics

2.1 Categorical Count (Raw)

```
school_type <- rc17 %>%  
  count(SCHOOL_TYPE_NAME, sort = TRUE) %>%  
  mutate(rel_freq = n/sum(n))  
school_type
```

```
## # A tibble: 4 x 3  
##   SCHOOL_TYPE_NAME      n rel_freq  
##   <chr>          <int>   <dbl>  
## 1 ELEMENTARY      2406   0.634  
## 2 HIGH SCHOOL      644   0.170  
## 3 MIDDLE SCHL      604   0.159  
## 4 CHARTER SCH      142   0.0374
```

2.2 Categorical Count (Formatted)


```
kable(school_type) %>%  
  kable_styling(bootstrap_options = "striped", full_width = FALSE)
```

SCHOOL_TYPE_NAME	n	rel_freq
ELEMENTARY	2406	0.6338251
HIGH SCHOOL	644	0.1696523
MIDDLE SCHL	604	0.1591149
CHARTER SCH	142	0.0374078

2.3 Categorical Plot

```
ggplot(rc17, aes(x=factor(SCHOOL_TYPE_NAME)))+  
  geom_bar(fill="#2F4E6F")+
```

```
labs(title = "Type of School", x = "School Type", subtitle = "All Illinois Schools (2017)") +
theme_minimal()
```

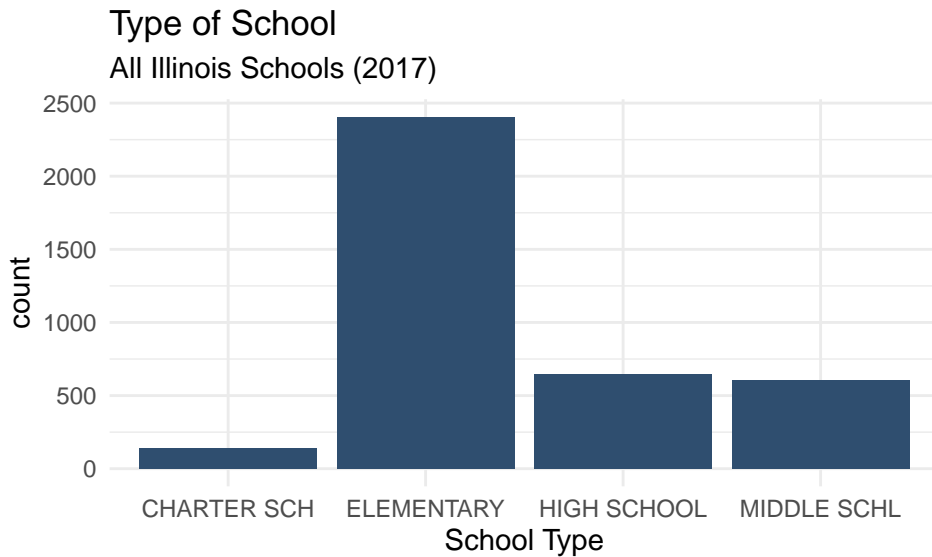

2.4 Categorical Analysis I


Write a short analysis for the types of schools in the state of Illinois.

2.5 Categorical Analysis II

```
rc17 %>%
filter(COUNTY == "Dupage" | COUNTY == "Will" | COUNTY == "Kane" |
        COUNTY == "Lake" | COUNTY == "Cook" | COUNTY == "McHenry") %>%
ggplot(aes(x=factor(SCHOOL_TYPE_NAME), y = (..count..)/sum(..count..))) +
  geom_bar(fill="#2F4E6F")+
  facet_wrap(~COUNTY, nrow = 2) +
  labs(title = "Type of School by County",
        x = "School Type",
        y = "proportion",
        subtitle = "Six Counties in the Chicago Metropolitan Region (2017)") +
  theme_minimal() +
  theme(axis.text.x = element_text(angle = 60, vjust = 0.5))
```

Type of School by County

Six Counties in the Chicago Metropolitan Region (2017)

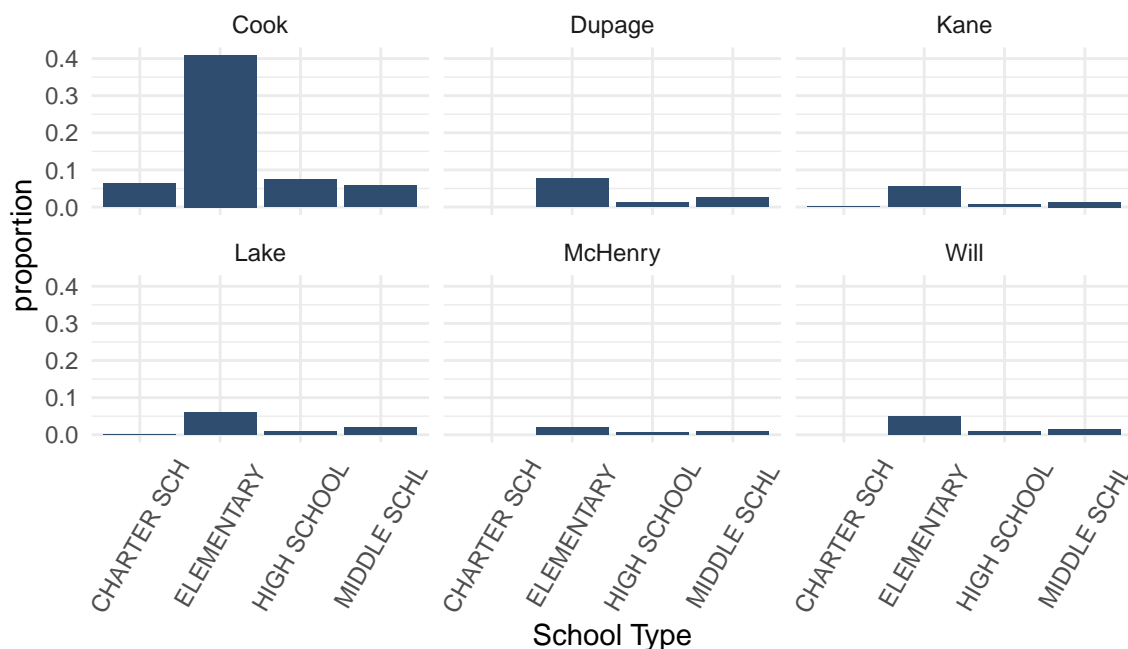

Write a short analysis for the types of schools in the six county region.

3 Software

3.1 R and RStudio

R is open source, free, industry-standard statistical analysis software that was first introduced in 1993. (R is an adaptation of the S language that was invented at Bell Labs in 1976.) RStudio, which arrived in 2011, is a free development environment for using R. Both R and RStudio have a bit of an initial learning curve, but mastering a few basic commands opens up a world of analysis options. The RStudio installation page <https://rstudio.com/products/rstudio/download/#download> provides instructions for setting up both R and RStudio. Suggestions for learning R are in the Appendix.

3.2 Fathom

Key Curriculum Press, the creators of The Geometer's Sketchpad software, sells Fathom (\$39 USD) at <https://fathom.concord.org>. Fathom is graphical statistical analysis software which accomplishes most tasks through a drag and drop interface. Its primary audience is teachers and students, but has reached end-of-life status. It can still be purchased and used but no further developments are expected.

3.3 Others

Excel, JMP, and SAS are other software platforms that can be used for analysis but will not be discussed here. The report card data will be provided in .csv format which can be imported by these programs.

4 Data Import

4.1 Data Files

INSERT GRAPHIC HERE

1. **Super Easy Method** All graphs from this presentation are available for download at [INSERT MMC GITHUB HTML LINK]. ???Look in the appendix section.
2. **Easy Method** A reasonably sized (2.7MB) data file containing 316 variables for the 2,049 schools in the Chicagoland six county region is available at http://frankbriody.com/rc17_data.zip. The six counties are Cook, Dupage, Kane, Lake, McHenry and Will. This data file can be imported into RStudio, Fathom, Excel, etc.
3. **Some Variables for All Schools** I used the import script `import_rc17.txt` to select 316 variables for all 3,796 Illinois schools. A 5MB data file is available at http://frankbriody.com/rc17_data.zip. Again, this data file can be imported into RStudio, Fathom, Excel, etc.
4. **Starting from Scratch** The original raw data is available on the ISBE Report Card Data Library web page <https://www.isbe.net/Pages/Illinois-State-Report-Card-Data.aspx>. You will need to download both the fixed width data file (`rc17.txt` 2.4MB becomes 35.4MB) and the variable definitions (`RC17_layout.xlsx`). Use and/or modify `import_rc17.txt` <https://github.com/fbriody/MMC2020> to get a subset of the data into RStudio.

A note about files and file names:

- The original ISBE data is in a file named `rc17.txt`.
- An import command is used in RStudio to produce a data frame named `rc17`. This dataframe is a container within RStudio and is not a separate external file. This import command is available as `rc17_import.txt` and is available at <https://github.com/fbriody/MMC2020>. Filtering or modifying the dataframe within RStudio does not write changes to the original `rc17.txt` file.
- After a subset of the original `rc17.txt` datafile was imported into RStudio, a subset was exported as `rc17.csv`. It is important to note that this `.csv` file does **NOT** contain all of the original ISBE variables - only 316 variables for all Illinois schools. This subset is also available at http://frankbriody.com/rc17_data.zip.
- RStudio (or other software) can be used to export a dataframe or a filtered subset of a dataframe to `.csv`. A six county subset, `sixco.csv` is included in the data file linked above.

Subsetting and exporting is a two step process. First, use R to create the subset:

```
sixco <- rc17 %>%  
  filter(COUNTY %in% c("Cook", "Lake", "Will", "Kane", "McHenry", "Dupage"))
```

Then, export:

```
write.csv(sixco,"sixco.csv", row.names = FALSE)
```

The resulting `.csv` can be imported by another software platform. (Note there is no need to export if you are staying in RStudio. Just refer to your new dataframe subset, in this case `sixco`.) You can customize the above command(s) to suit your needs.

To get a `.csv` file into R, either use the File menu and Import Dataset, or send the command

```
newdata <- read.csv(file = 'datafile.csv')
```

which creates a `newdata` dataframe within RStudio.

4.2 Processed into Fathom

Import one of the `.csv` data files into Fathom by choosing **File -> Import -> Import from File...** and then navigate to the file location.

4.3 Importing .csv into Excel

Use Excel to import `rc17.csv`.

5 Numeric Summaries

5.1 Lists

To get the number of High Schools per county in the Six County Region:

```
sixco %>%  
  filter(SCHOOL_TYPE_NAME == "HIGH SCHOOL") %>%  
  group_by(COUNTY) %>%  
  summarise(count = n())
```

```
## # A tibble: 6 x 2  
##   COUNTY count  
##   <chr>   <int>  
## 1 Cook      151  
## 2 Dupage     23  
## 3 Kane       16  
## 4 Lake       21  
## 5 McHenry    14  
## 6 Will       17
```

McHenry county seems like a good candidate for small-set data that can be analyzed with a graphing calculator. Subsetting based on a criteria produces a single list of scores.

```
mchenry_act <- rc17 %>%  
  filter(COUNTY == "McHenry", is.na(ACT_COMP_SCHOOL) == FALSE )  
mchenry_act$ACT_COMP_SCHOOL
```

```
## [1] 22.4 19.7 18.1 23.1 22.6 23.8 22.7 24.0 21.1 19.9 22.9 22.9 21.4 21.2
```

Adding `sort()` orders the scores. Remove the comma and the `decreasing` option to produce an increasing list.

```
sort(mchenry_act$ACT_COMP_SCHOOL, decreasing = TRUE)
```

```
## [1] 24.0 23.8 23.1 22.9 22.9 22.7 22.6 22.4 21.4 21.2 21.1 19.9 19.7 18.1
```

Lake County is a little larger, but a boxplot can be quickly made from an ordered and formatted table of ACT Scores. Create a boxplot for Lake County ACT scores. How could you compare to DuPage county?

```
lake_ACT <- rc17 %>%  
  filter(SCHOOL_TYPE_NAME == "HIGH SCHOOL", COUNTY == "Lake") %>%  
  arrange(desc(ACT_COMP_SCHOOL)) %>%  
  select(COUNTY, SCHOOL_NAME, ACT = ACT_COMP_SCHOOL)  
kable(lake_ACT)
```

COUNTY	SCHOOL_NAME	ACT
Lake	Adlai E Stevenson High School	26.9
Lake	Deerfield High School	26.4
Lake	Lake Forest High School	26.3
Lake	Libertyville High School	25.9
Lake	Highland Park High School	25.2
Lake	Vernon Hills High School	25.1
Lake	Lake Zurich High School	24.9
Lake	Barrington High School	24.8
Lake	Grayslake Central High School	23.3
Lake	Lakes Community High School	22.6
Lake	Grayslake North High School	22.4
Lake	Warren Township High School	22.1
Lake	Wauconda High School	21.8
Lake	Antioch Comm High School	21.7
Lake	Mundelein Cons High School	21.4
Lake	Grant Community High School	21.3
Lake	New Tech High - Zion-Benton East	20.1
Lake	Zion-Benton Twnshp Hi Sch	18.6
Lake	Waukegan High School	17.9
Lake	Round Lake Senior High School	17.8
Lake	North Chicago Community High Sch	17.5

5.2 Two-Way Tables

```
district_type <- rc17 %>%
  filter(COUNTY == "Lake" | COUNTY == "Dupage") %>%
  group_by(COUNTY)

two_way <- with(district_type, table(DISTRICT_SIZE_NAME, COUNTY))

kable(two_way, caption = "Types of School Districts") %>%
  kable_styling(bootstrap_options = "striped", full_width = F, latex_options = "hold_position")
```

Table 1: Types of School Districts

	Dupage	Lake
LARGE	182	150
MEDIUM	52	38
SMALL	0	4

5.3 Mean vs Median


A numeric summary for instructional spending per pupil by district:

```
rc17 %>%
  filter(SCHOOL_TYPE_NAME == "HIGH SCHOOL") %>%
  group_by(DISTRICT_NAME) %>%
  summarize(spend_stu = mean(INSTRUCT_EXPEND_PER_PUPIL_DISTRICT201516, na.rm = TRUE)) %>%
  summary()
```

```
## DISTRICT_NAME      spend_stu
## Length:473        Min.   : 2975
## Class :character   1st Qu.: 5263
## Mode  :character   Median : 5912
##                      Mean    : 6571
##                      3rd Qu.: 7315
```

```
##           Max.      :15535
##           NA's      :1
```

Putting summary numbers on a plot:

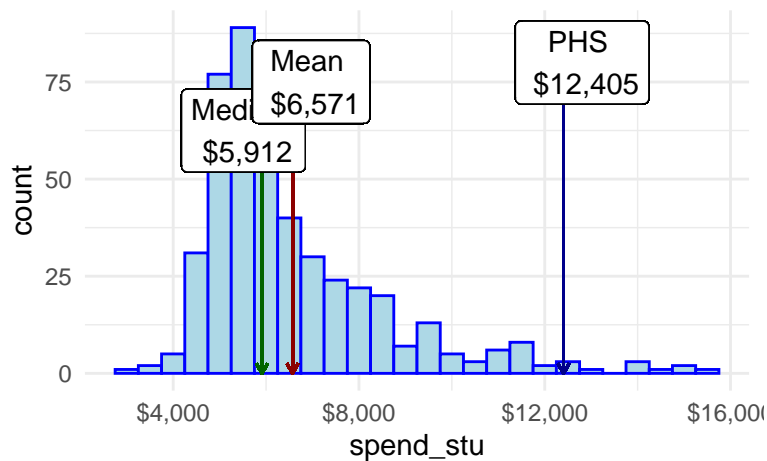


Boxplots

```
sixco %>%
  filter(SCHOOL_TYPE_NAME == "HIGH SCHOOL") %>%
  ggplot(mapping = aes(x = COUNTY, y = ACT_COMP_SCHOOL)) +
  geom_boxplot() +
  theme_minimal() +
  coord_flip() +
  labs(x = "County", y = "Composite ACT",
       title = "Composite ACT Scores for High Schools")
```

```
## Warning: Removed 4 rows containing non-finite values (stat_boxplot).
```

Composite ACT Scores for High School

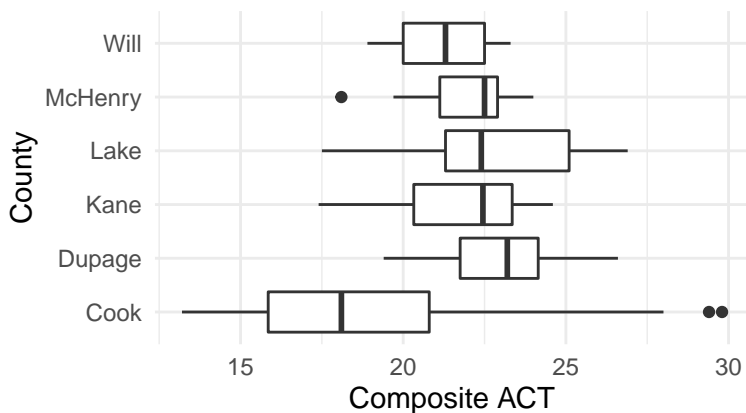

Comment on the distribution of ACT scores both within and between counties. For which counties would you expect the mean to be close to the median? Which county or counties would prefer to report the median instead of the mean?

6 Single Values

6.1 Finding a School

```
rc17 %>%
  filter(str_detect(SCHOOL_NAME, "Morton")) %>%
  select(SCHOOL_ID, SCHOOL_NAME, ACT_COMP_SCHOOL)
```



```
## # A tibble: 7 x 3
##   SCHOOL_ID      SCHOOL_NAME      ACT_COMP_SCHOOL
##   <chr>         <chr>         <dbl>
## 1 060162010170001 J Sterling Morton East High Sch      18.4
## 2 060162010170002 J Sterling Morton West High Sch      18.7
## 3 060162010170003 J Sterling Morton Freshman Cntr       NA
## 4 070161450022004 Morton Gingerwood Elem School       NA
## 5 150162990252844 Morton Elem Career Academy       NA
## 6 530907090260006 Morton High School       23.3
## 7 530907090261005 Morton Jr High School       NA
```

6.2 Using a Filter

```
prospect <- rc17 %>%
  filter(str_detect(SCHOOL_NAME, "Prospect High School"))
prospect_act <- prospect$ACT_COMP_SCHOOL
prospect_act
```

```
## [1] 25
```

6.3 Using a Function

If you put this right after the data import step you can always find single values for a specific school quickly.

```
phs_value <- function(unk) {
  x <- rc17 %>%
    filter(SCHOOL_ID == "050162140170005")
  x[unk]
}
```

```
phs_value("ACT_COMP_SCHOOL")
```

```
## # A tibble: 1 x 1
##   ACT_COMP_SCHOOL
##   <dbl>
## 1          25
```

6.4 Analysis in Fathom

Drag a table from the shelf, drag a Graph from the shelf then drag a variable (or variables) onto the graph.

Fathom tries to auto detect **variable types**, but you can force a change by holding down **shift** or **option**. Missing values are often stored as character, so creating a scatterplot may require holding down **option**. If a categorical variable is coded as a number, holding down **shift** coerces into categorical.

Double-clicking a value opens up Fathom's **inspecting** box.

6.5 Filters in Excel

Excel has quite powerful filter tools. For reasonably sized data files, it may be efficient to filter and export a .csv then open the subset of data in RStudio.

7 Correlation and Regression

7.1 Guess the Correlation

- ACT Composite vs Chronically Truant (#) Guess:_____ Actual:_____
- ACT Composite vs Chronically Truant (%) Guess:_____ Actual:_____
- ACT Composite vs Student Mobility Guess:_____ Actual:_____

- ACT Composite vs Attendance rate (%) Guess:_____ Actual:_____


7.2 Scatterplot Analysis

The analysis of scatterplots should lead to a discussion about outliers, influentials and regression details.

```
ACTvLI <- sixco %>%
  ggplot(mapping = aes(x = LOWINCOME_SCHOOL_per, y = ACT_COMP_SCHOOL)) +
  geom_point(color="Blue", size = 1) +
  theme_minimal()
```

ACTvLI


Warning: Removed 1779 rows containing missing values (geom_point).

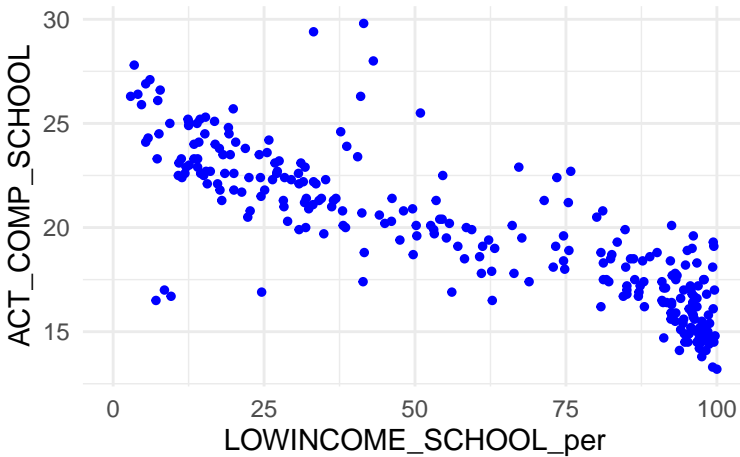

Add some labels using the `ggrepel` package. (The warning about missing values has been removed. Also notice the layering of information.)

```
library(ggrepel)
```

```
ACTvLI +
  geom_text(aes(label=ifelse(SCHOOL_ID == "050162140170005",
                             as.character(SCHOOL_NAME), '')), hjust=0, vjust=0) +
  geom_text_repel(aes(LOWINCOME_SCHOOL_per, ACT_COMP_SCHOOL,
                      label = ifelse(ACT_COMP_SCHOOL > 25 &
                                      LOWINCOME_SCHOOL_per > 25,
                                      SCHOOL_NAME, "")), size = 3)
```

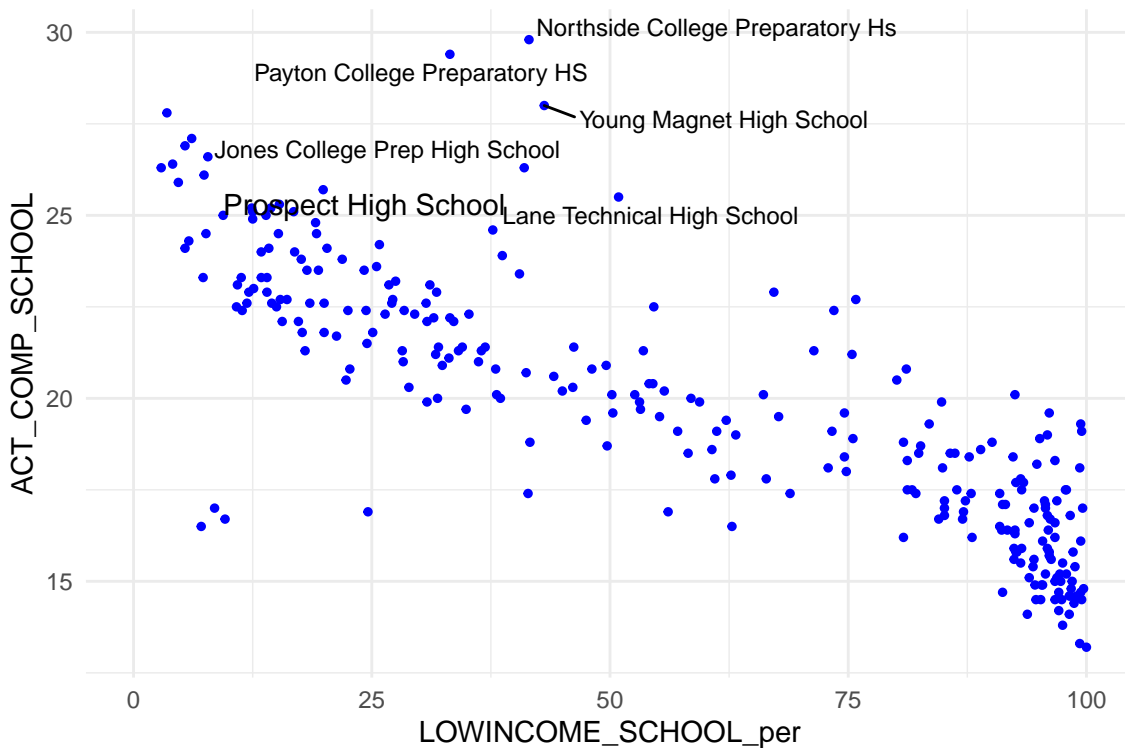

7.3 Predicting ACT Scores


Suppose you choose 3 variables (Composite ACT Score, Enrollment and Attendance Rate) for all schools in the Six County region. What question(s) and display(s) would you explore?

Adding a third variable introduces another layer of analysis.

```
sixco %>% ggplot(mapping = aes(x= ATTENDANCE_RATE_SCHOOL_perALL, y = ACT_COMP_SCHOOL)) +
  geom_point(aes(alpha = sixco$SCHOOL_TOTAL_ENROLLMENT)) +
  labs(alpha = "Enrollment", x = "Attendance Rate", y = "ACT Composite", title = "Predicting ACT from Attendan",
  theme(legend.position = c(.165, .75), text = element_text(size=10))
```

Predicting ACT from Attendance

Six County High Schools

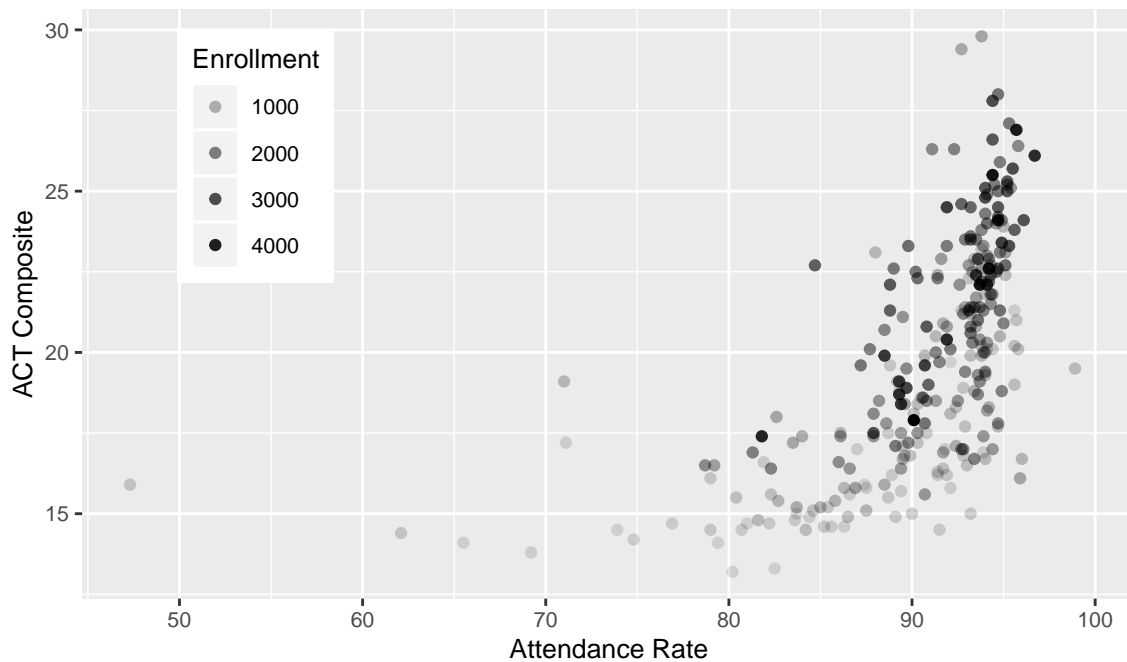

7.4 Regression Output

Predicting ACT from attendance for all schools:

```
summary(lm(sixco$ACT_COMP_SCHOOL~sixco$ATTENDANCE_RATE_SCHOOL_perALL))
```

```
##
## Call:
## lm(formula = sixco$ACT_COMP_SCHOOL ~ sixco$ATTENDANCE_RATE_SCHOOL_perALL)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -5.7088 -2.2108 -0.2343  1.8209 10.9398
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -11.26875     2.61192   -4.314 2.25e-05
## sixco$ATTENDANCE_RATE_SCHOOL_perALL  0.34311     0.02887  11.886 < 2e-16
##
## (Intercept) ***
## sixco$ATTENDANCE_RATE_SCHOOL_perALL ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 2.844 on 268 degrees of freedom
## (1779 observations deleted due to missingness)
## Multiple R-squared:  0.3452, Adjusted R-squared:  0.3427
## F-statistic: 141.3 on 1 and 268 DF, p-value: < 2.2e-16
```

Removing an influential point:

```
sixco_removed <- sixco %>%
  filter(ATTENDANCE_RATE_SCHOOL_perALL>50)
```


```
summary(lm(sixco_removed$ACT_COMP_SCHOOL~sixco_removed$ATTENDANCE_RATE_SCHOOL_perALL))
```

```
##
## Call:
## lm(formula = sixco_removed$ACT_COMP_SCHOOL ~ sixco_removed$ATTENDANCE_RATE_SCHOOL_perALL)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -5.8340 -2.1147 -0.1728  1.6627  8.7676
##
## Coefficients:
##              Estimate Std. Error t value
## (Intercept)    -16.74644     2.81182  -5.956
## sixco_removed$ATTENDANCE_RATE_SCHOOL_perALL  0.40322     0.03104  12.993
##              Pr(>|t|)
## (Intercept)    8.13e-09 ***
## sixco_removed$ATTENDANCE_RATE_SCHOOL_perALL  < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 2.75 on 267 degrees of freedom
## (1778 observations deleted due to missingness)
## Multiple R-squared:  0.3873, Adjusted R-squared:  0.385
## F-statistic: 168.8 on 1 and 267 DF,  p-value: < 2.2e-16
```

Both models on the same plot. A best fit line can be added by including

```
geom_smooth(method = lm, na.rm = TRUE, se = FALSE) +
```

in the ggplot command. Is there a *significant* change?

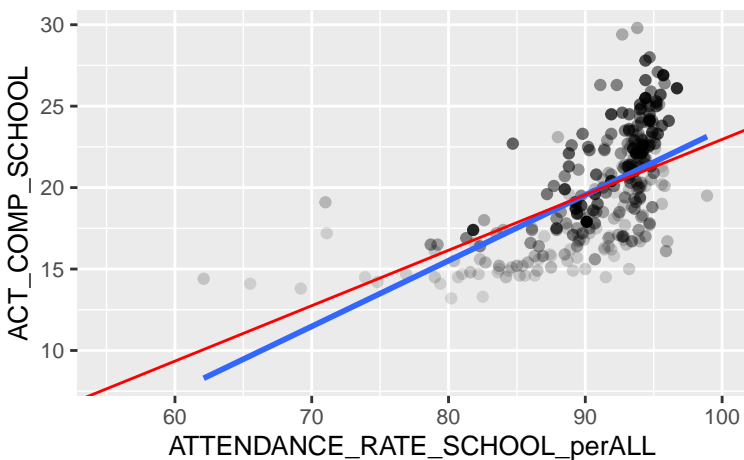


7.4.1 Residual Plot

Notice that residual plots are residuals vs. predicted and not residuals vs. explanatory.

Predicting ACT from Attendance Rate (%)

Residual Plot; By School, Six County Region High School

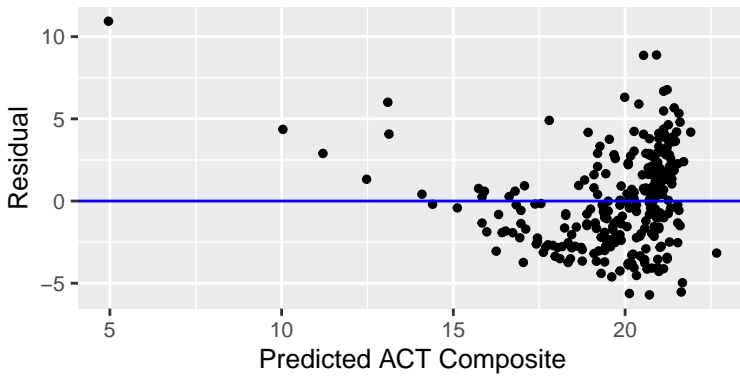

7.5 Regression in Fathom

Force a variable to be numeric (option) or categorical (shift). Adding a Third Variable: Are charter schools different?

8 Random Selection and Simulation

8.1 Rolling a die

```
set.seed(2020)
one_die <- sample(1:6, 10, replace = TRUE)
one_die
```

```
## [1] 4 4 6 1 1 4 2 6 1 5
```

8.2 Random Selection

Quickly generating a sampling distribution:

```
four_schools <- sample_n(rc17, 4)
four_schools[c("SCHOOL_NAME", "SCHOOL_TOTAL_ENROLLMENT")]
```

```
## # A tibble: 4 x 2
##   SCHOOL_NAME                SCHOOL_TOTAL_ENROLLMENT
##   <chr>                      <dbl>
## 1 South Side Elementary School      312
## 2 Coventry Elem School             565
## 3 Plano High School                714
## 4 Wanda Kendall Elem School        236
```

```
mean(four_schools$SCHOOL_TOTAL_ENROLLMENT)
```

```
## [1] 456.75
```

8.3 Stratified Sample

```
strat_samp <- sixco %>%
  filter(SCHOOL_TYPE_NAME == "HIGH SCHOOL") %>%
  group_by(COUNTY) %>%
  sample_n(3)
strat_samp[c("SCHOOL_NAME", "COUNTY", "SCHOOL_TOTAL_ENROLLMENT")]
```

```
## # A tibble: 18 x 3
## # Groups:   COUNTY [6]
```

SCHOOL_NAME	COUNTY	SCHOOL_TOTAL_ENROLLMENT
1 Marshall Metropolitan High School	Cook	358
2 Proviso West High School	Cook	1850
3 Chicago Vocational Career Acad HS	Cook	901
4 Westmont High School	Dupage	449
5 Glenbard East High School	Dupage	2244
6 Hinsdale South High School	Dupage	1507
7 Kaneland Senior High School	Kane	1342
8 East High School	Kane	3848
9 St Charles North High School	Kane	1985
10 Highland Park High School	Lake	2040
11 Libertyville High School	Lake	1935
12 Zion-Benton Twnshp Hi Sch	Lake	2263
13 Woodstock North High School	McHenry	942
14 Huntley High School	McHenry	2996
15 Crystal Lake South High School	McHenry	1527
16 Bolingbrook High School	Will	3469
17 Lincoln-Way Central High School	Will	2157
18 Wilmington High School	Will	465

8.4 Confidence Interval Simulation

A function that samples then calculates confidence interval bounds and stores results in a matrix.

```
rand_samp <- function(samples, vari, samp_size) {
  sixco_hs_nona <- sixco_hs[!is.na(sixco_hs[vari]), ] #remove schools with no value
  a <- matrix(ncol = 7, nrow = samples)
  for (k in 1:samples){
    dat_fra <- sample_n(sixco_hs_nona, samp_size)
    t_star <- qt(.975, df = samp_size - 1)
    x_bar <- mean(dat_fra[[vari]])
    stan_dev <- sd(dat_fra[[vari]])
    lower_b <- x_bar - t_star*stan_dev/(samp_size)**.5
    upper_b <- x_bar + t_star*stan_dev/(samp_size)**.5
    v1 <- k
    v2 <- x_bar
    v3 <- stan_dev
    v4 <- lower_b
    v5 <- upper_b
    v6 <- samp_size
    v7 <- mean(sixco_hs[[vari]], na.rm = TRUE)

    a[k,] <- c(v1, v2, v3, v4, v5, v6, v7)}
  colnames(a) <- c("Sample", "Mean", "StdDev", "L_Bound", "U_Bound", "Sample_Size", "Parameter")
  return(a)
}
```

Converting the matrix to a table of output.


```
confid_ints <- as_tibble(rand_samp(29, "ACT_COMP_SCHOOL", 25))
confid_ints
```

```
## # A tibble: 29 x 7
##   Sample Mean StdDev L_Bound U_Bound Sample_Size Parameter
##   <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
## 1     1  18.7   3.37   17.3   20.1        25    20.1
## 2     2  21.0   3.98   19.3   22.6        25    20.1
## 3     3  20.1   3.59   18.6   21.6        25    20.1
```

```
## 4      4 19.6  3.48  18.2  21.0      25      20.1
## 5      5 19.3  3.61  17.8  20.8      25      20.1
## 6      6 20.3  2.75  19.1  21.4      25      20.1
## 7      7 20.6  3.16  19.3  21.9      25      20.1
## 8      8 21.1  3.05  19.8  22.3      25      20.1
## 9      9 20.6  3.53  19.1  22.0      25      20.1
## 10     10 19.6  3.26  18.3  21.0      25      20.1
## # ... with 19 more rows
```

Plotting confidence intervals and comparing to parameter:

```
ggplot(confid_ints, mapping = aes(x=L_Bound, xend = U_Bound, y = Sample)) +
  geom_point(aes(x=Mean, y=Sample)) +
  geom_vline(xintercept = mean(confid_ints$Parameter),
    linetype="dashed",
    color = "grey",
    size=1) +
  geom_dumbbell(size_xend=0,size_x=0,
    color = ifelse(confid_ints$U_Bound < confid_ints$Parameter |
      confid_ints$L_Bound > confid_ints$Parameter,
        "red", "black")) +
  labs(x = "Average ACT Score",
    title = paste(max(confid_ints$Sample),
      "Samples of size n =",
      max(confid_ints$Sample_Size)
    ),
    subtitle = paste("Parameter = ",round(confid_ints$Parameter,2))
  ) +
  theme_minimal()
```

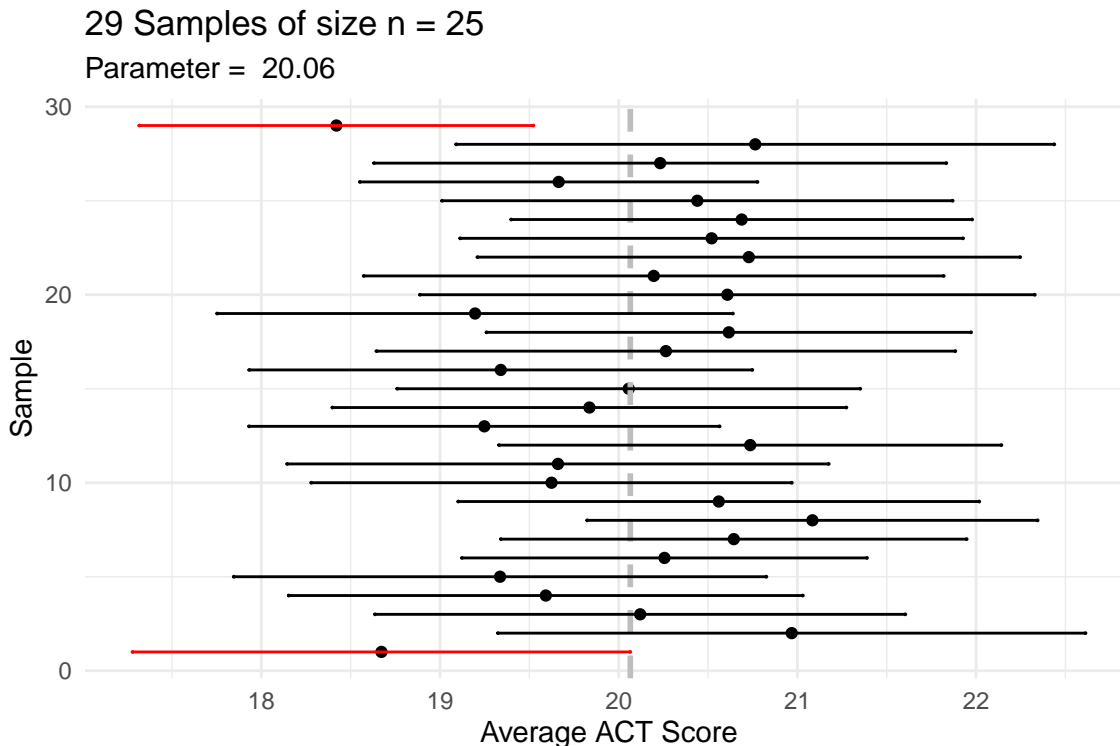

9 Appendix

9.1 Learning More

9.1.1 R and RStudio

R4DS ### Fathom ### Statistics DePaul, Udacity, CodeAcademy, DataCamp Generic Graphs